

**TONNEAU COVER
INSTRUCTIONS MANUAL**

**CACHE-BAGAGES
MANUEL D'INSTRUCTIONS**

**For customer use
Please keep with vehicle**

**À l'usage du client
À conserver avec le véhicule**



0 2 5 3

PART NUMBER/N°DE PIÉCE


TOYOTA TONNEAU COVER INSTRUCTION MANUAL

Failure to follow these safety instructions and warnings will void warranty and may cause property damage and /or personal injury.


The tonneau cover must be in 1 of 2 positions before driving your vehicle.

Driving Position 1-Flat

- 2x Front Latches
- 2x Safety Cables
- 2x Rear Latches

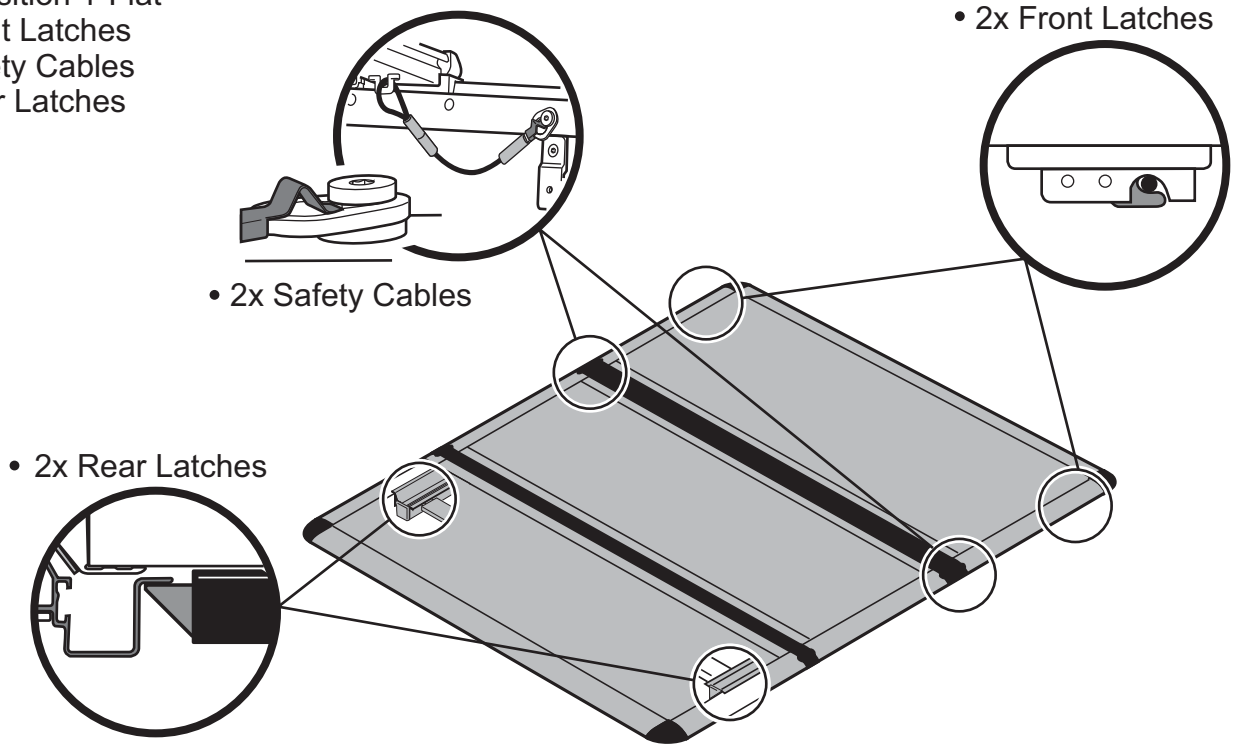

Before driving, pull up on the front and rear corners to make sure that the cover is securely attached.

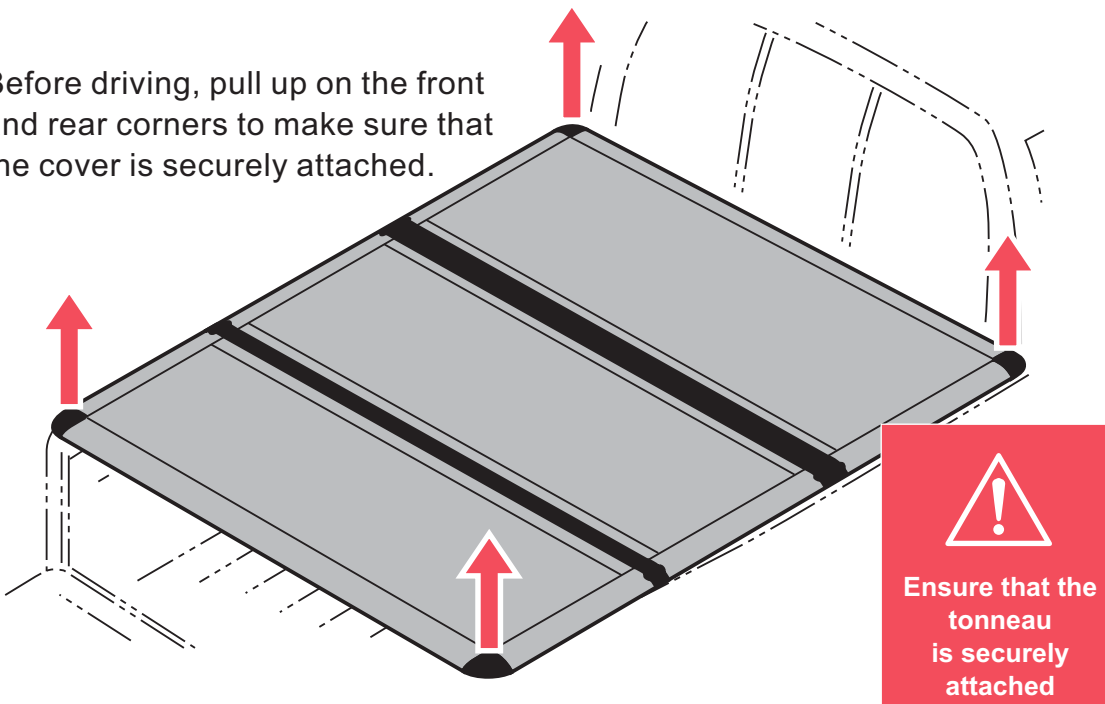


Please contact Toyota dealerships for additional questions.

The tonneau cover must be in 1 of 2 positions before driving your vehicle.


Driving Position 2- Open

- 2x Front Latches
- 2x Safety Cables
- 2x Front Buckles

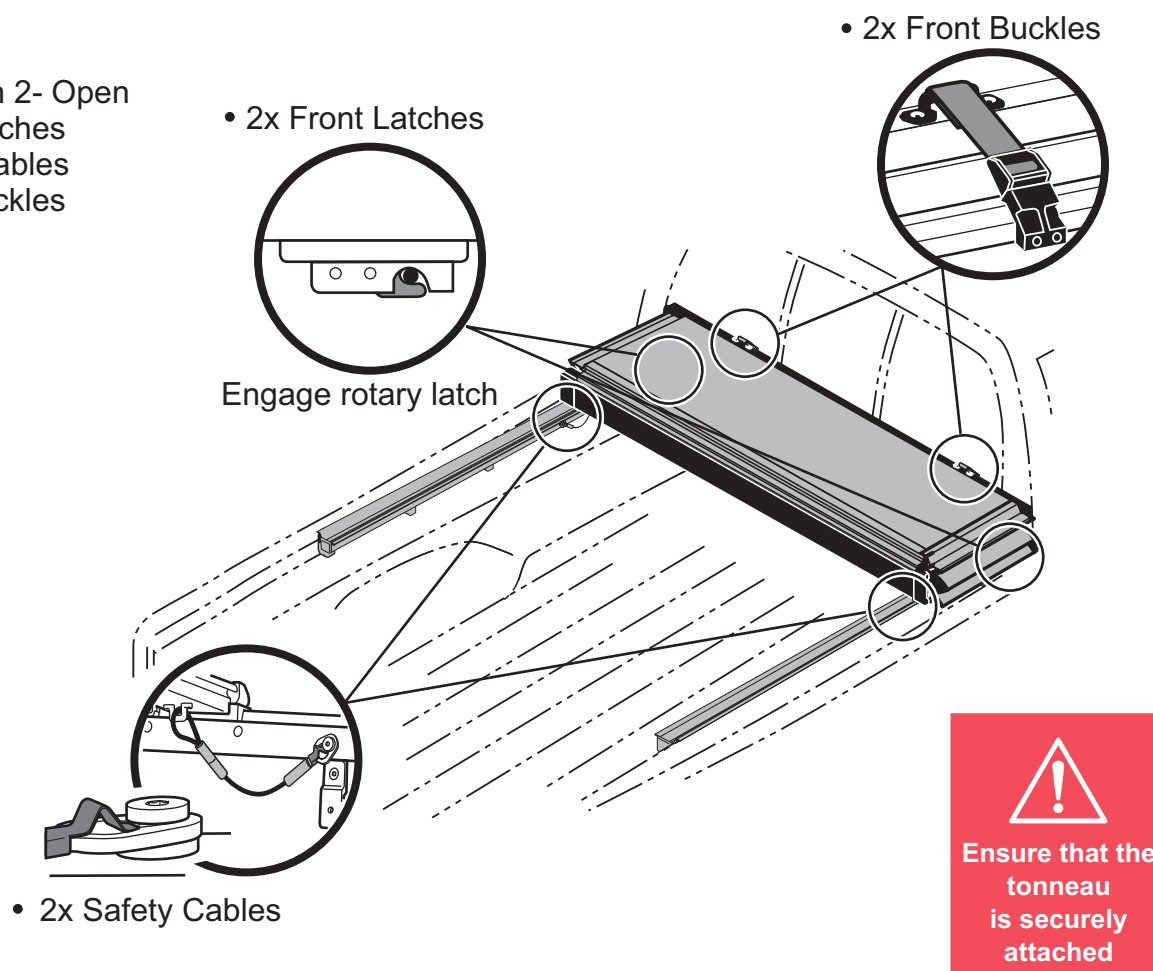


Before driving, confirm that:

1. BOTH safety cables are firmly attached.
2. Cover is attached to the truck.
3. BOTH front straps are buckled.

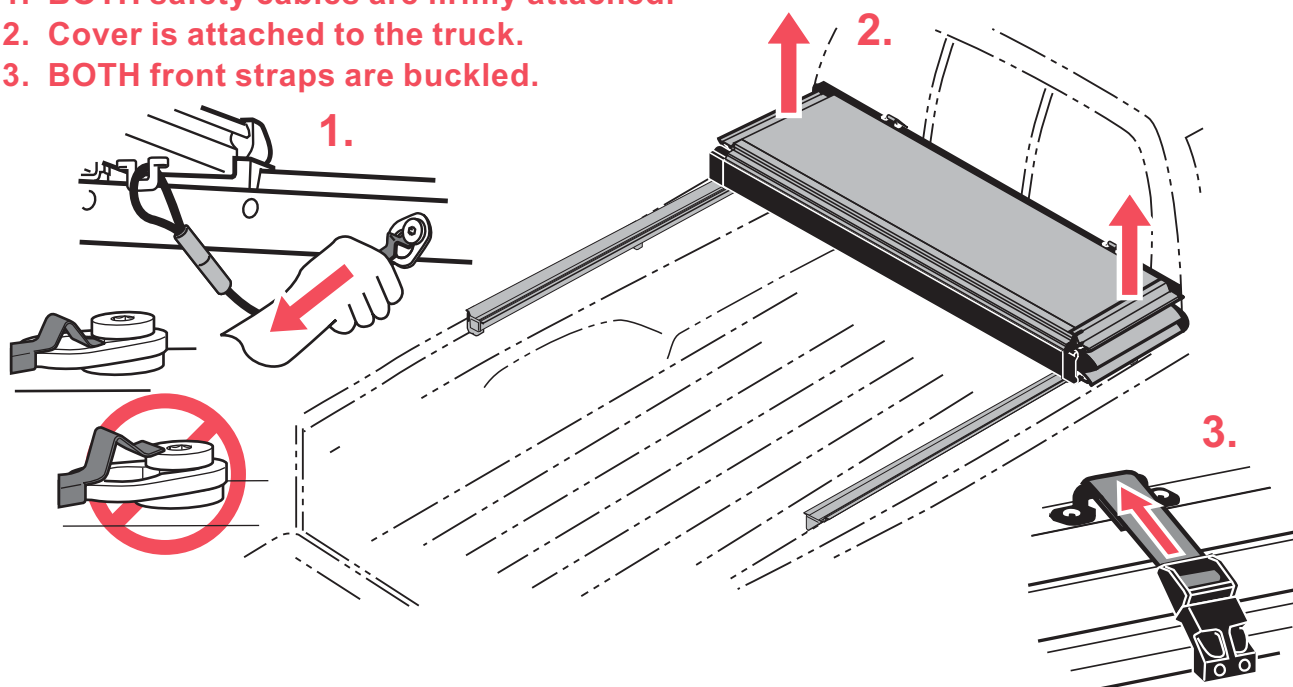

Removing the tonneau cover.


1. Unlatch the tail panel, fold open the tail panel and then the center panel.

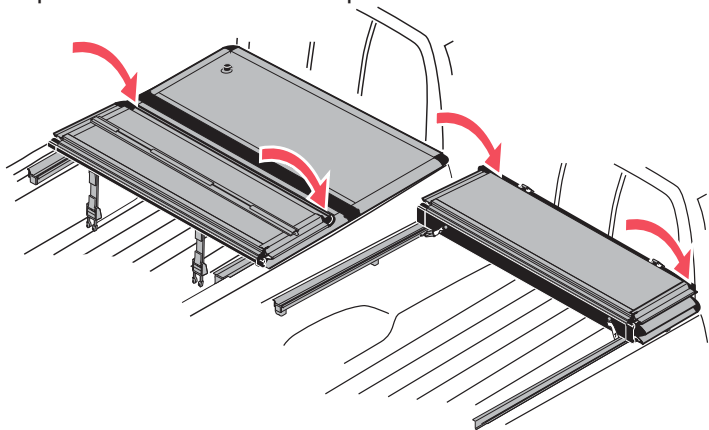


2. Buckle the two front straps.




3. Remove the two safety cables.

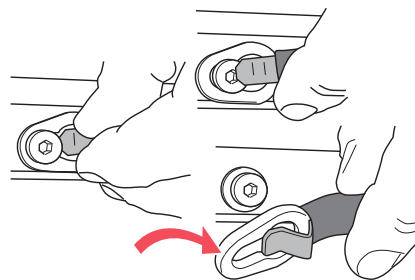


4. Pull the two cables underneath the front panel to unlatch the latches while also standing the panel bundle up.

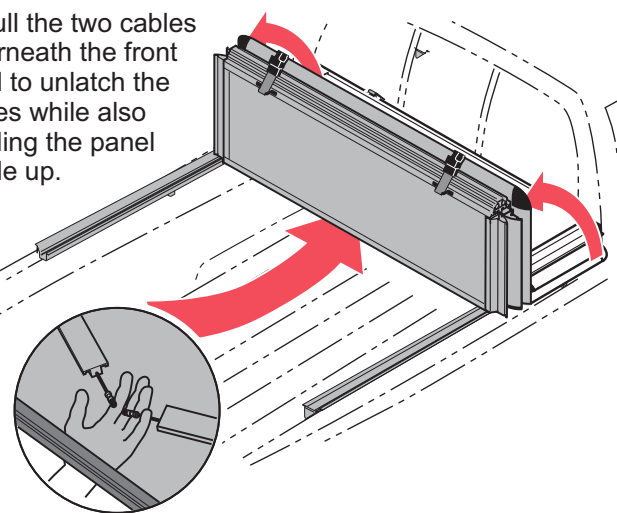


5. Remove the cover from the truck.

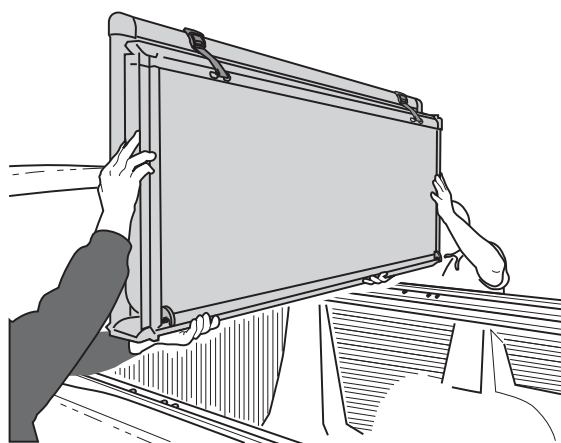


Reinstalling the tonneau cover.

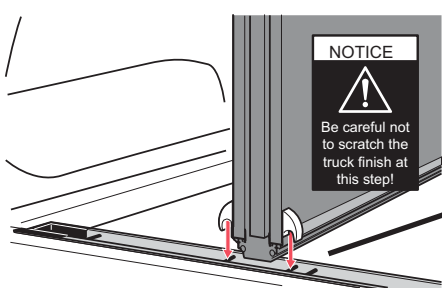



1. Line up the hooks with the two pins as shown

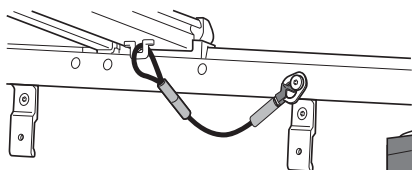

3. Attach the two safety cables, one on each side. Make sure that the spring clip is installed properly as shown.




2. Lay the bundled cover as shown.

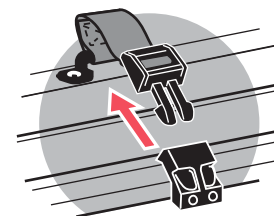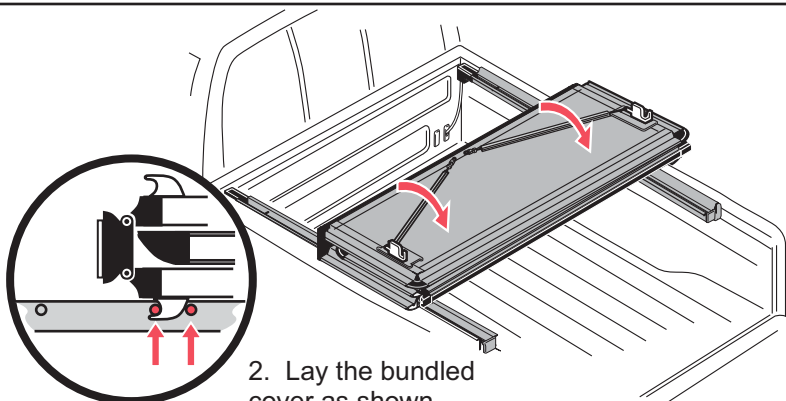


4. Unclip the buckles.

Reinstalling the tonneau cover - continued

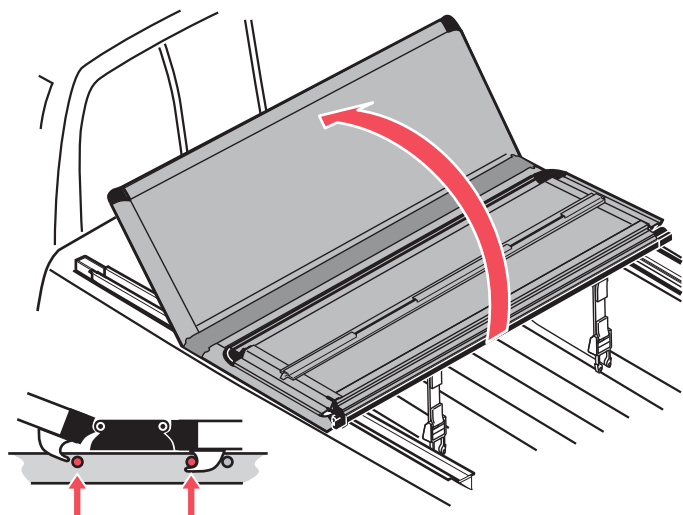

5. Unfold the cover forward. Make sure that the hooks are aligned with the pins on the side rail.

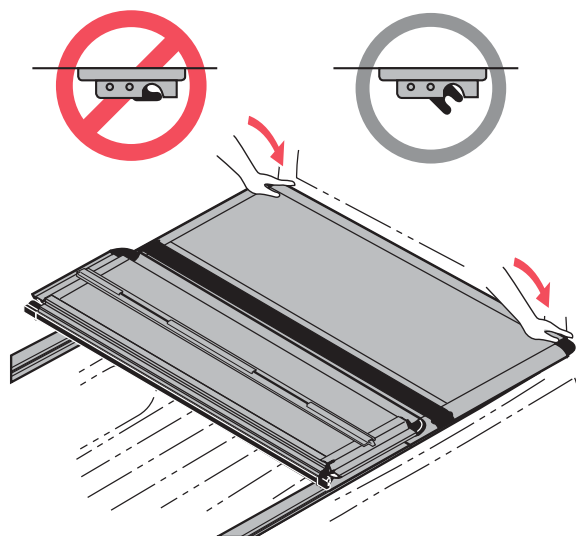


6. Press down on the cab panel to lock it in place.

NOTICE: Before driving, your tonneau cover needs to be in either Driving position 1 (Page 1) or Driving Position 2 (Page 2).

SAFETY AND MAINTENANCE.

Always check these before you drive!

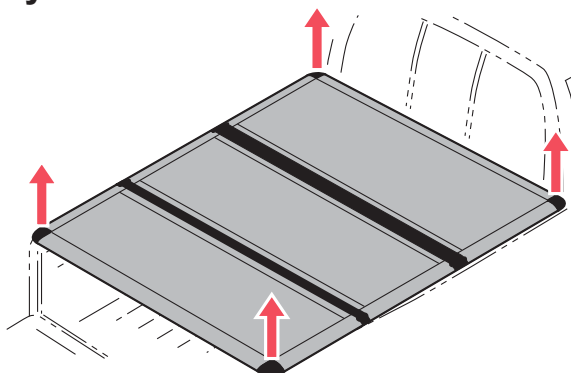

Attention: Water entry may occur under certain conditions. Please protect belongings accordingly.



Remove any snow or foreign matter before folding tonneau.



DO NOT place objects or operate vehicle with objects on top of the tonneau cover.



DO NOT tow your vehicle from the rear with this tonneau on the truck.

Maintaining Tonneau Cover

- Use mild car wash soap to clean. Do not use dishwashing soap or other harsh soap products
- When storing tonneau cover, store it indoors and protect it from the elements.


MANUEL D'INSTRUCTIONS POUR COUVRE-CAISSE TOYOTA

Si les consignes de sécurité et les avertissements ci-dessous ne sont pas suivis, cela annulera la garantie et pourrait causer des dommages matériels et/ou des blessures.


Il est nécessaire de placer le couvre-caisse dans une des deux positions suivantes avant de mettre le véhicule en mouvement.

Position 1- À plat

- 2x loquets avant
- 2x câbles de sécurité
- 2x loquets arrière

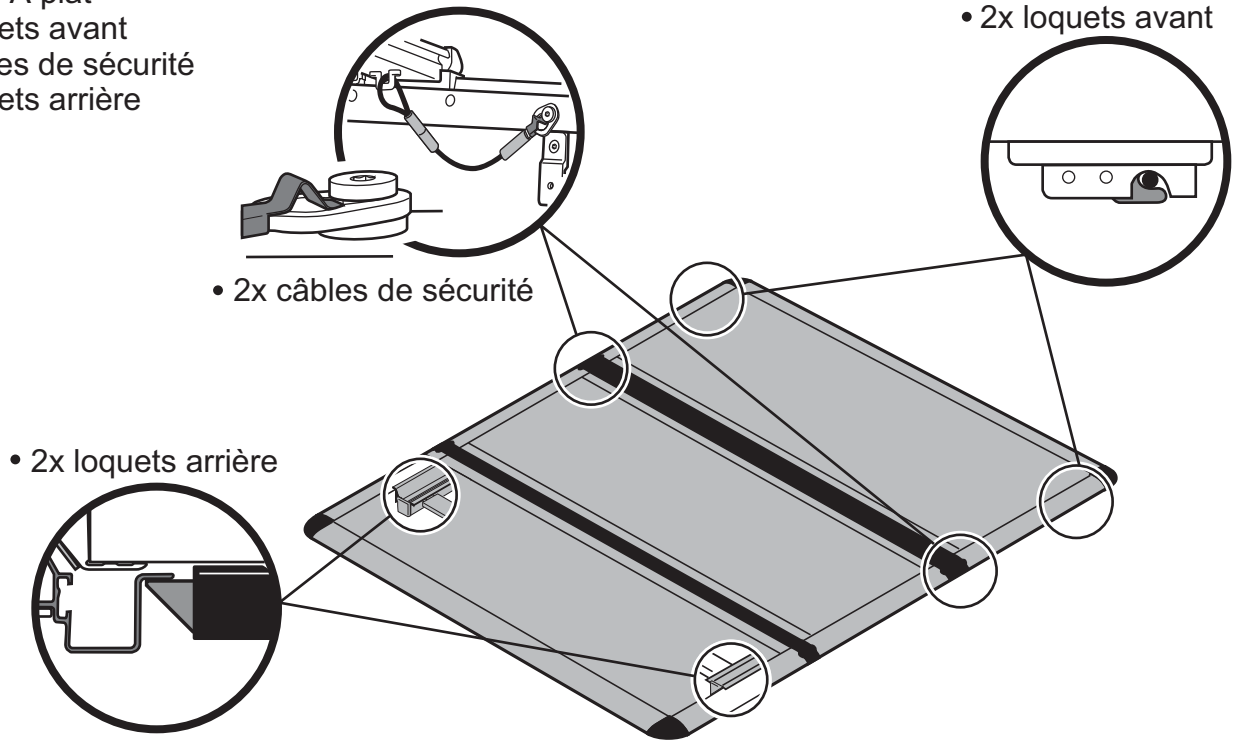

Avant de rouler, TIRER sur les panneaux avant et arrière pour s'assurer que le couvre-caisse est bien immobilisé.

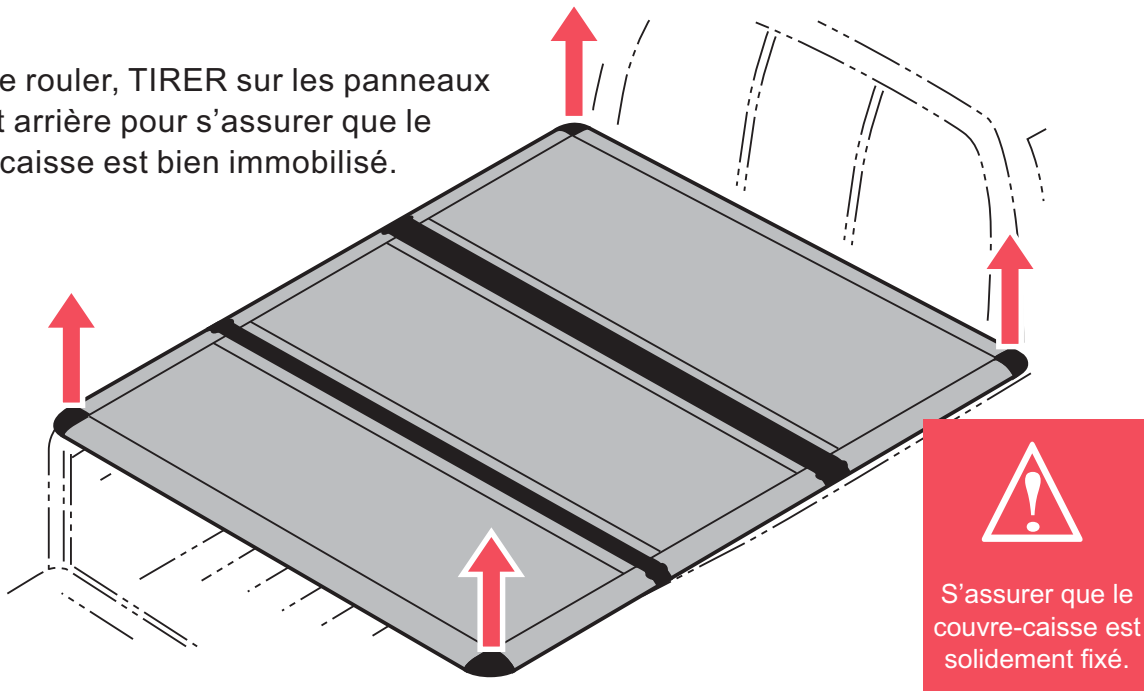


Si vous avez des questions, veuillez communiquer avec un concessionnaire Toyota.

Il est nécessaire de placer le couvre-caisse dans une des deux positions suivantes avant de mettre le véhicule en mouvement.

Position 2- Ouvert



- 2x loquets avant
- 2x câbles de sécurité
- 2x boucles avant

- 2x loquets avant

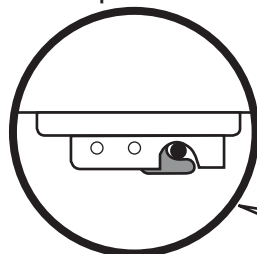

Engager le loquet rotatif

- 2x boucles avant

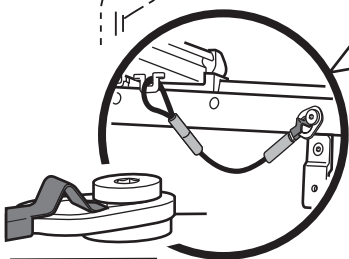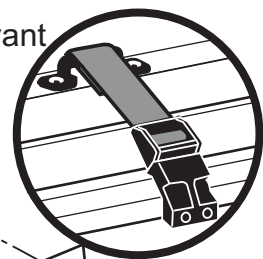





- 2x câbles de sécurité



S'assurer que
le couvre-caisse
est solidement
fixé.


Avant de rouler, vérifier si :

- 1. Les DEUX câbles sont solidement fixés.**
- 2. Les couvre-caisse est fixé au camion.**
- 3. Les DEUX sangles avant sont bouclées.**

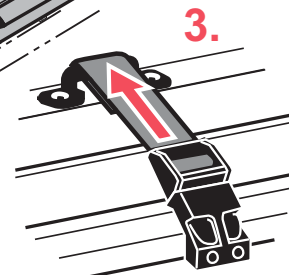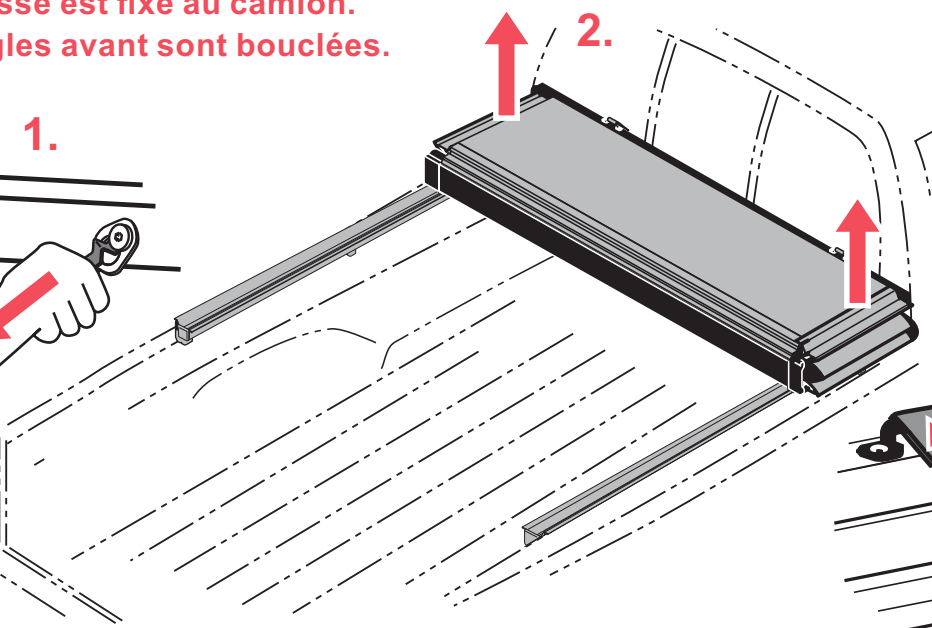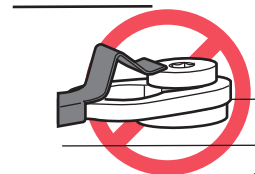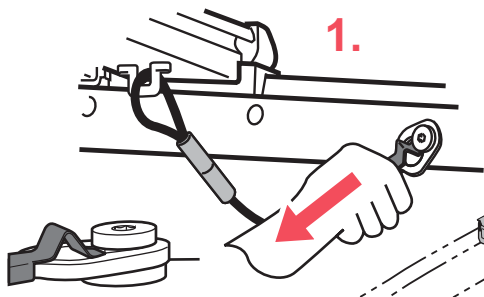

Retrait du couvre-caisse.



1. Rabattre le panneau arrière et le panneau central.

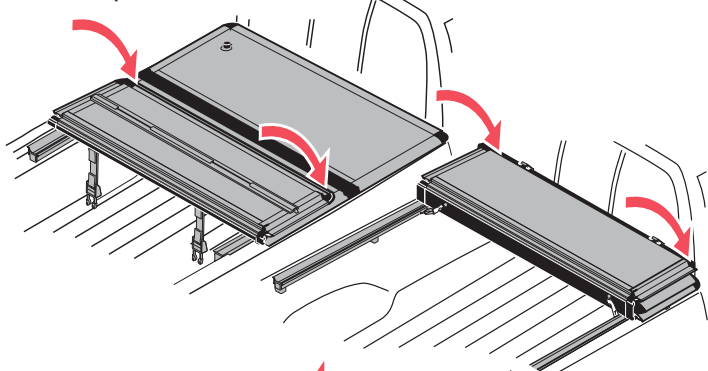


2. Boucler les deux sangles avant.



3. Enlever les deux de sécurité.

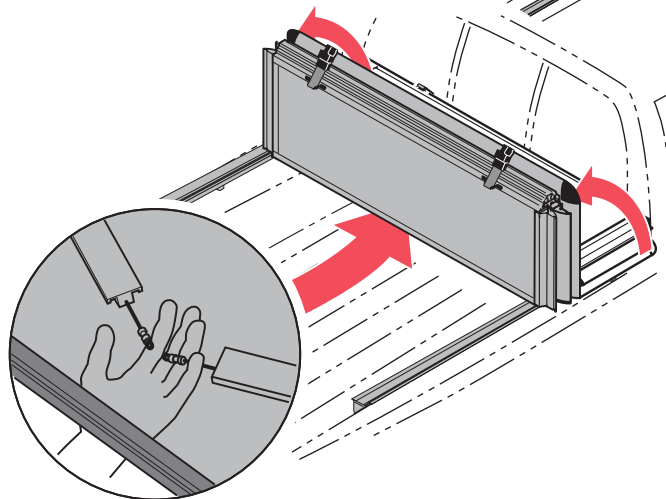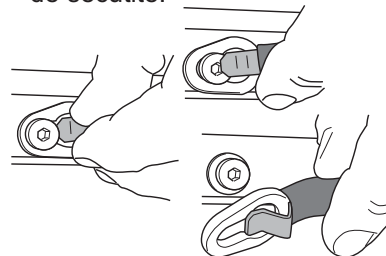


4. En tirant sur les deux câbles qui sont sous le panneau avant, relever la pile de panneaux.


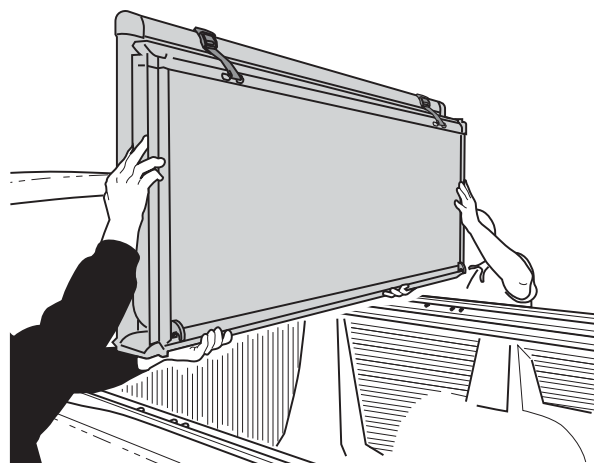


5. Retirer le couvre-caisse du camion.


Réinstallation du couvre-caisse

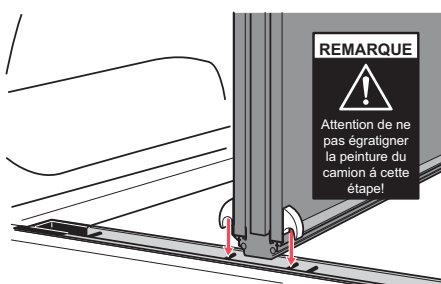

1. Aligner les crochets avec les deux goupilles, comme illustré.

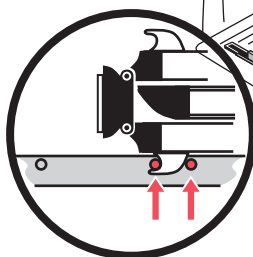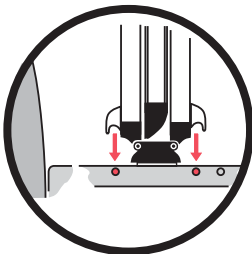


2. Déposer le couvre-caisse replié, comme illustré.

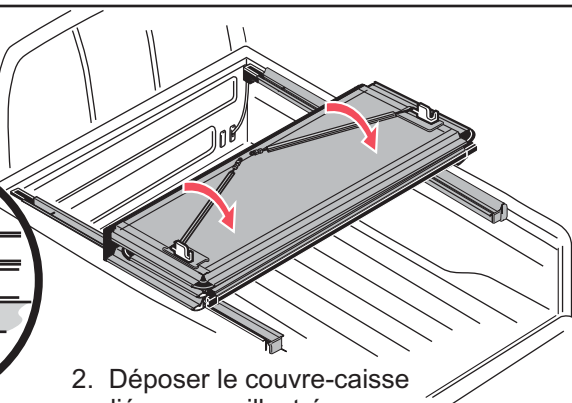


3. Fixer les deux câbles de sécurité. S'assurer que l'attache à ressort est correctement installée, comme illustré.




4. Dégrafer les boucles.



Réinstallation du couvre-caisse - suite

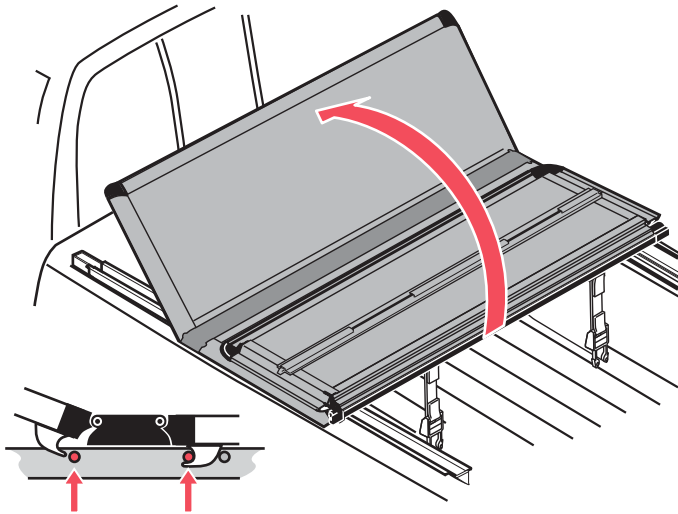

5. Déplier le couvre-caisse vers l'avant. S'assurer que les crochets sont alignés avec les goupilles du rail.


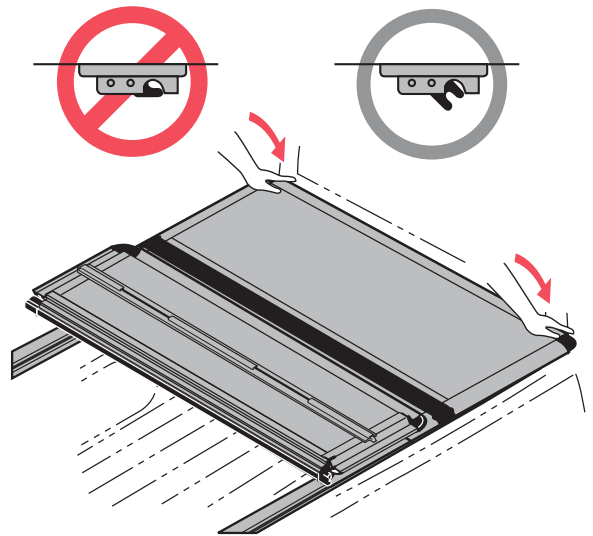


6. Appuyer sur le panneau avant pour le verrouiller en place.

AVIS: Avant de rouler, s'assurer que le couvre-caisse est dans la position 1 (page 1) ou dans la position 2 (page 2).

SÉCURITÉ ET ENTRETIEN

Toujours faire les vérifications suivantes avant conduire le véhicule !

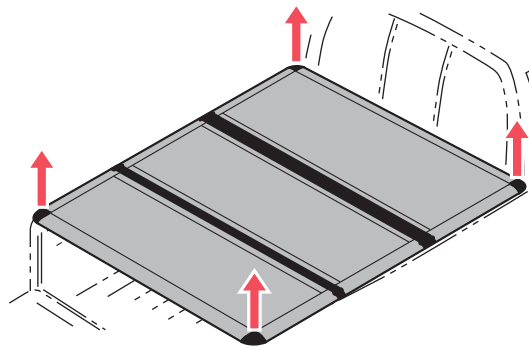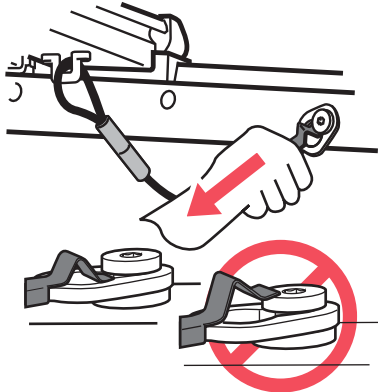

Attention: une entrée d'eau peut se produire dans certaines conditions. Veuillez protéger vos biens en conséquence.



Enlever toute neige ou autre matière avant de replier le couvre-caisse.



NE PAS placer d'objets sur le couvre-caisse et ne pas conduire le véhicule quand des objets se trouvent sur le couvre-caisse.



NE PAS remorquer le véhicule depuis l'arrière lorsque le couvre-caisse est en place.

Entretien du couvre-caisse

- Utiliser un savon doux pour voiture pour le nettoyer. Ne pas utiliser de savon à vaisselle ou d'autres agents de nettoyage puissants.
- Entreposer le couvre-caisse à l'intérieur pour le protéger des éléments.