

TACOMA
2 0 1 9



QUICK REFERENCE GUIDE

2019

TACOMA

This Quick Reference Guide is a summary of basic vehicle operations. It contains brief descriptions of fundamental operations so you can locate and use the vehicle's main equipment quickly and easily.

The Quick Reference Guide is not intended as a substitute for the Owner's Manual located in your vehicle's glove box. We strongly encourage you to review the Owner's Manual and supplementary manuals so you will have a better understanding of your vehicle's capabilities and limitations.

Your dealership and the entire staff of Toyota Motor North America, Inc. wish you many years of satisfied driving in your new Tacoma.

A word about safe vehicle operations

This Quick Reference Guide is not a full description of Tacoma operations. Every Tacoma owner should review the Owner's Manual that accompanies this vehicle.

Pay special attention to the boxed information highlighted in color throughout the Owner's Manual. Each box contains safe operating instructions to help you avoid injury or equipment malfunction.

All information in this Quick Reference Guide is current at the time of printing. Toyota reserves the right to make changes at any time without notice.

INDEX

OVERVIEW

Engine maintenance	9
Fuel tank door release and cap	8
Hood release	8
Indicator symbols	4-5
Instrument cluster	4
Instrument panel	2-3
Instrument panel light control	8
Keyless (and remote) entry ^{1,2}	6
Smart Key system ^{1,2}	7

FEATURES & OPERATIONS

Active traction control	26
Air conditioning/heating	23
Audio	18
Auto lock/unlock ¹	20
Automatic transmission	10-11
Blind Spot Monitor with Rear	
Cross Traffic Alert (BSM w/RCTA)	27
Clock	24
Clutch start cancel	13
Crawl Control	12
Cruise control	17
Door locks	24
Four-wheel drive	11
Garage door opener (HomeLink [®]) ³	27
Intelligent parking assist	28
Lights ¹ & turn signals	16
Manual transmission	11
Moonroof	22
Multi-Information Display (MID)	22
Multi-terrain select	12
Odometer and trip meter	13
Parking brake	14
Power outlet-12V DC	25
Power outlets-120V AC	25
Qi Wireless charger	21
Rear differential lock	26
Rear seats-Folding	15
Rear view monitor system	29
Seat adjustments-Front	14

FEATURES & OPERATIONS (continued)

Seat heaters	24
Seats-Head restraints	14
Steering lock release	29
Steering wheel switches & telephone controls (Bluetooth [®])	19
USB charge-ports	20
USB media/AUX port	20
Tilt and telescopic steering wheel	13
TRAC/VSC OFF switch	26
Trailer lights	25
Windows-Power	17
Windows-Power Sliding	
Rear window	28
Windshield wipers & washers	17

TOYOTA SAFETY SENSE™ P (TSS-P)

Automatic High Beams (AHB)	40
Dynamic Radar	
Cruise Control (DRCC)	37-39
Lane Departure Alert (LDA)	33-36
Pre-Collision System with Pedestrian Detection (PCS w/PD)	31-33
Quick overview-	
Toyota Safety Sense™ P (TSS-P)	30
Sensors	30

SAFETY & EMERGENCY FEATURES

Floor mat installation	45
Rear door child safety locks	42
Seat belts	41
Seat belts-Shoulder belt anchor	41
Spare tire & tools	43
Star Safety System™	44-45
Tire Pressure Monitoring (warning) System (TPMS)	42

BLUETOOTH® DEVICE PAIRING SECTION

46-55



¹ Visit your Toyota dealer for information on customizing this feature.

² Programmable by customer. Refer to the Owner's Manual for instructions and more information.

³ HomeLink[®] is a registered trademark of Genex Corporation.

OVERVIEW

Instrument panel

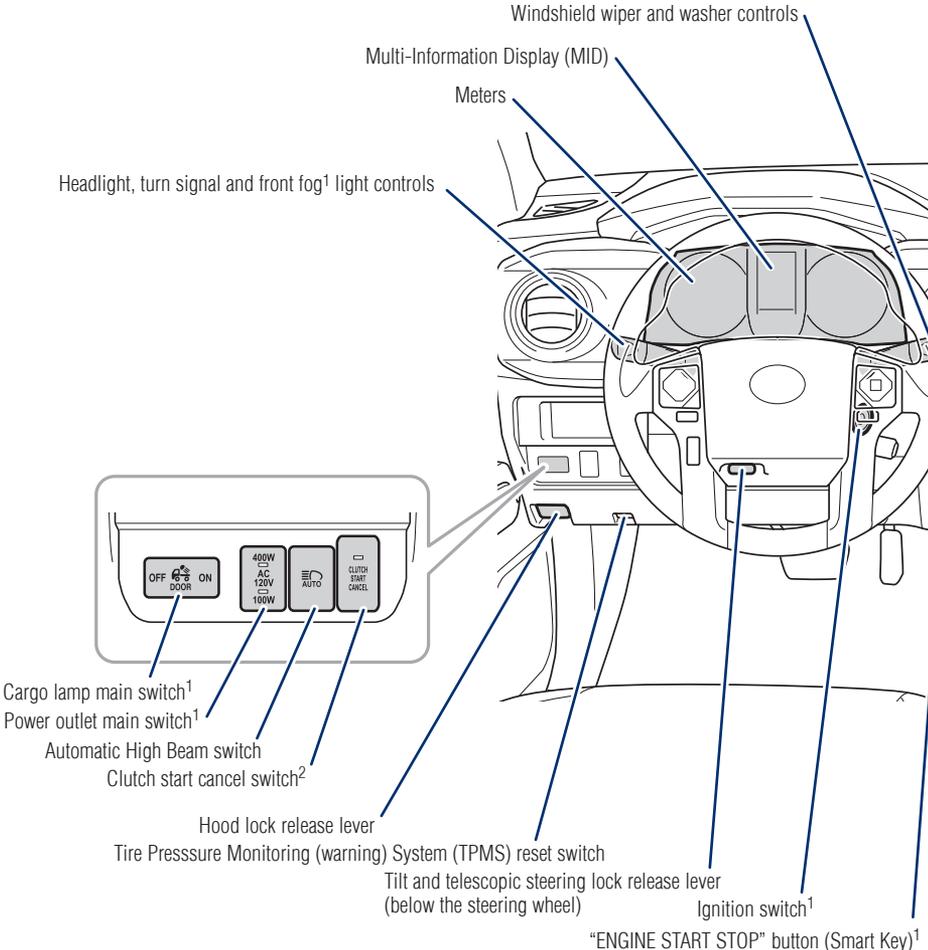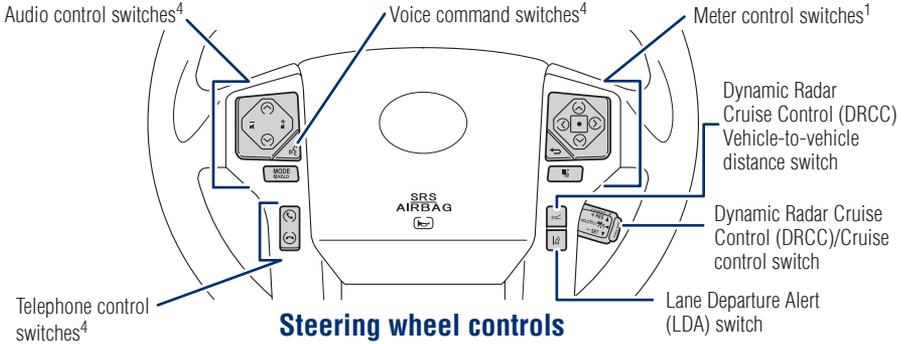


¹ If equipped.

² Manual transmission only.


³ Automatic transmission only.

⁴ For details, refer to the "Navigation and Multimedia System Owner's Manual" and "2019 Entune™ Audio Quick Reference Guide."

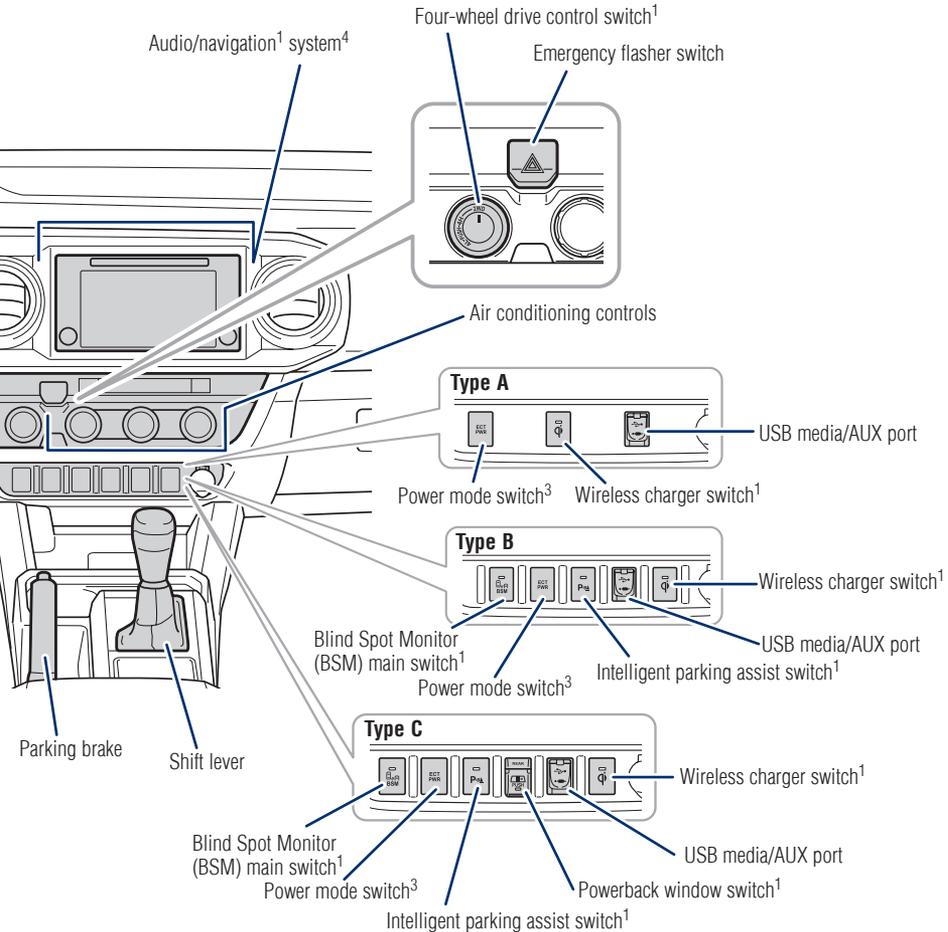

OVERVIEW

Instrument cluster

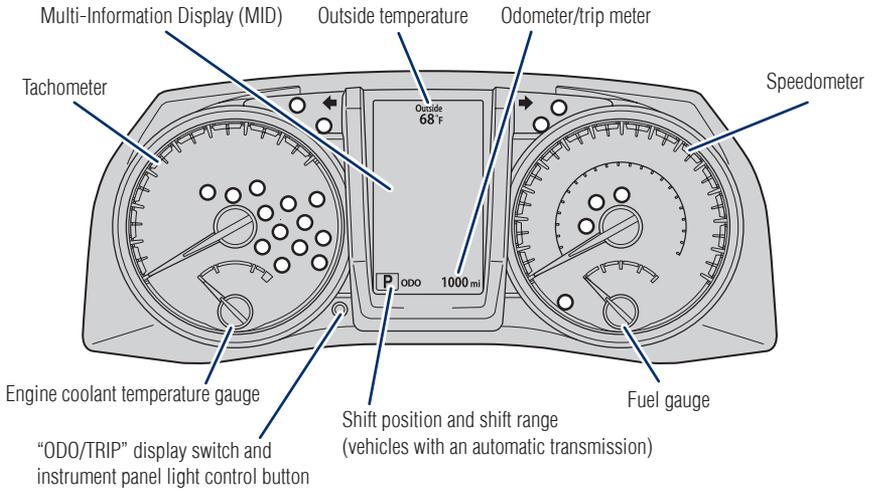

○ Service indicators and reminders

Indicator symbols

For details, refer to "Indicators and warning lights," Section 2, 2019 Owner's Manual.

 A-TRAC	Active traction control system indicator ⁵	 BSM	Blind Spot Monitor (BSM) outside rear view mirror indicator ⁵
 AIR BAG ON/OFF	AIR BAG ON/OFF indicators ¹		Brake Override System warning light
	Airbag SRS warning ¹	 BRAKE	Brake system warning ¹
 ABS	Anti-lock Brake System (ABS) warning ¹		Charging system warning ¹
 AUTO LSD	AUTO Limited Slip Differential (AUTO LSD) indicator ¹	 SET	Constant speed cruise control indicator/Constant speed cruise control SET indicator
 AUTO	Automatic High Beam (AHB) indicator		Crawl control indicator ⁵
 A/T OIL TEMP	Automatic Transmission fluid temperature warning		



¹ If the indicator does not turn off within a few seconds of starting the engine, there may be a malfunction. Have the vehicle inspected by your Toyota dealer.

² If the indicator flashes, there may be a malfunction. Refer to the Owner's Manual.

³ If the indicator flashes rapidly, there may be a malfunction. Refer to the Owner's Manual.

⁴ If the indicator flashes, it indicates that the system is operating.

⁵ If equipped.

OVERVIEW

Keyless (and remote) entry (if equipped)

UNLOCKING OPERATION




NOTE: If a door is not opened within 60 seconds of unlocking, all doors will relock for safety.

LOCKING OPERATION



PANIC BUTTON

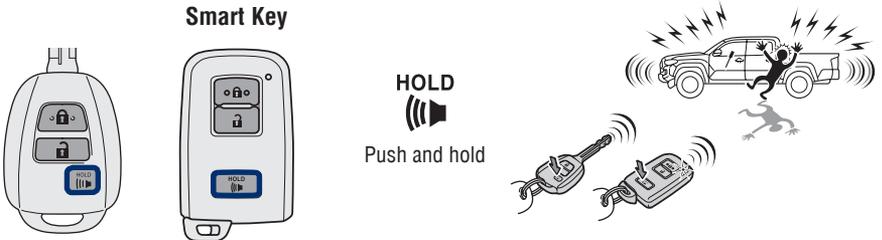


* Driver door unlocking function can be programmed to unlock driver door only, or all doors. Grasping front passenger door handle will unlock all doors.

NOTE: Doors may also be locked/unlocked using remote.

Smart Key system (if equipped)


START FUNCTION

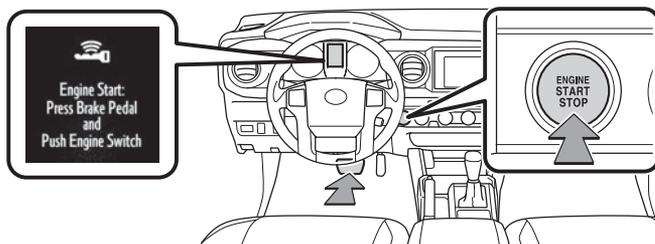

NOTE: The Smart Key must be carried to enable the start function. With gear shift lever in Park and the brake pedal depressed, push the “ENGINE START STOP” switch.


POWER (WITHOUT STARTING ENGINE)

Without depressing the brake pedal, pressing the engine switch will change the operation mode in succession from:

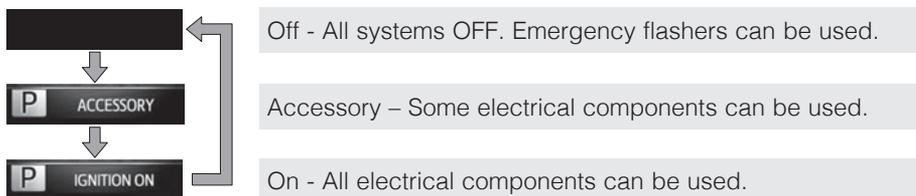


OVERVIEW

Fuel tank door release and cap

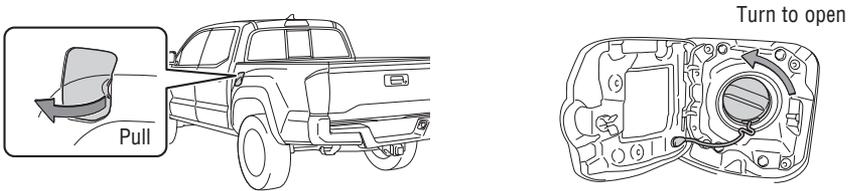


NOTE: Tighten until one click is heard. If the cap is not tightened enough, Check Engine “” indicator may illuminate.

Hood release

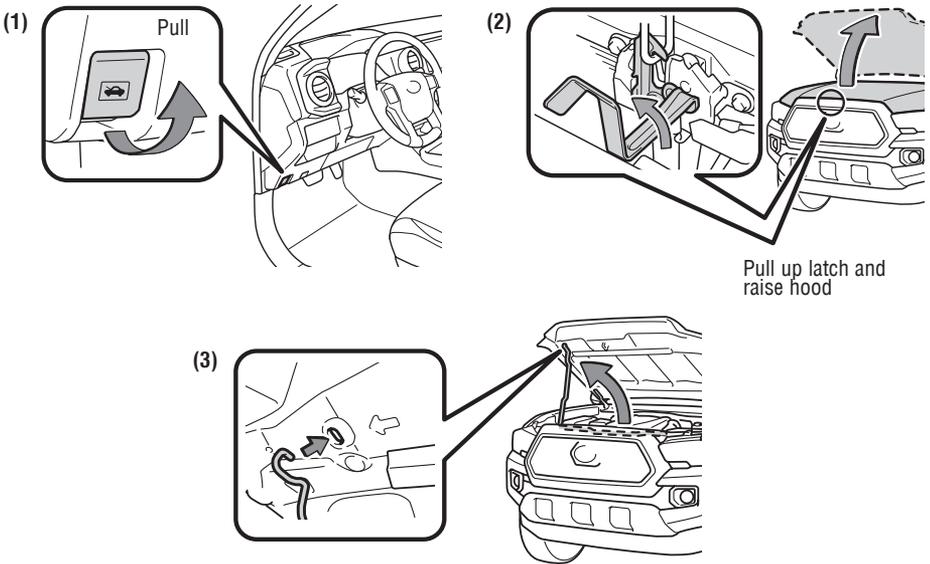


Instrument panel light control

Brightness control

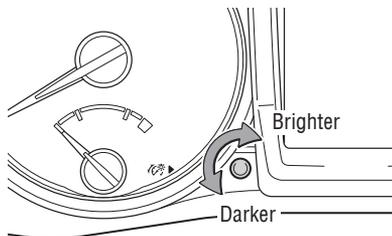


Engine maintenance

4 CYLINDER (2TR-FE) ENGINE

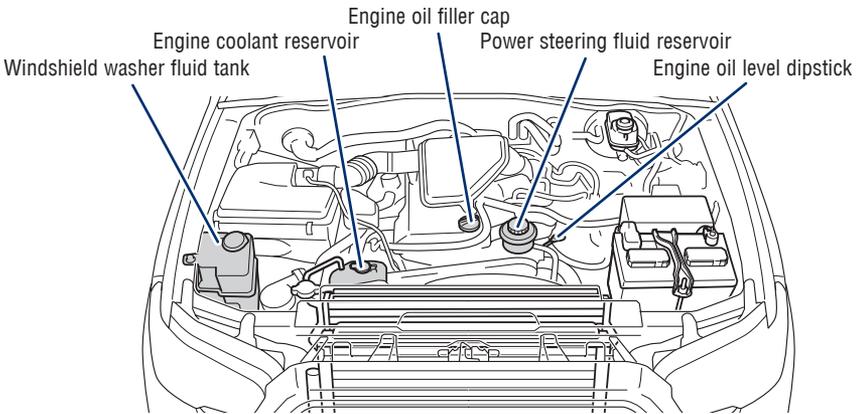


6 CYLINDER (2GR-FKS) ENGINE

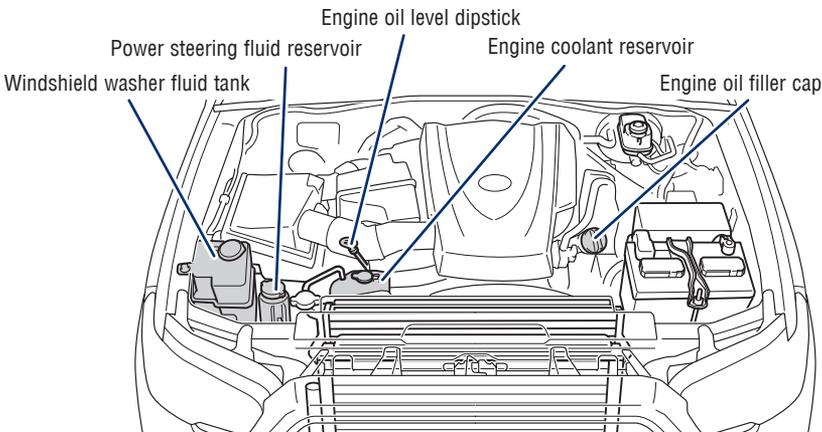

NOTE: Regularly scheduled maintenance, including oil changes, will help extend the life of your vehicle and maintain performance. Please refer to the “Warranty & Maintenance Guide.”

FEATURES & OPERATIONS

Automatic transmission (if equipped)

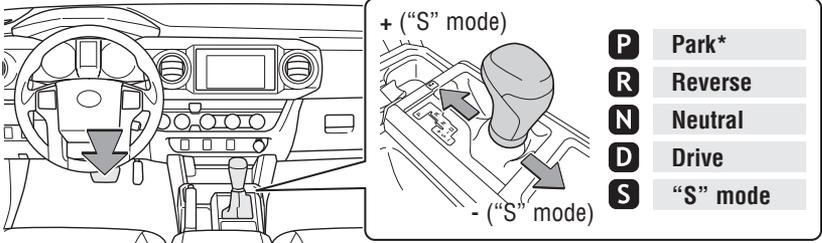


*The engine switch must be "ON" and the brake pedal depressed to shift from Park.

The initial shift range in "S" mode is set automatically to 5 or 4 according to vehicle speed.


Downshifting increases power going uphill, or provides engine braking downhill. For best fuel economy during normal driving conditions, always drive with the shift lever in the "D" position.

POWER MODE


Type A



Type B




Type C



**ECT
PWR**


Use when high levels of response and feeling are desirable, such as when driving in mountainous regions or when pulling a trailer.

"S" MODE

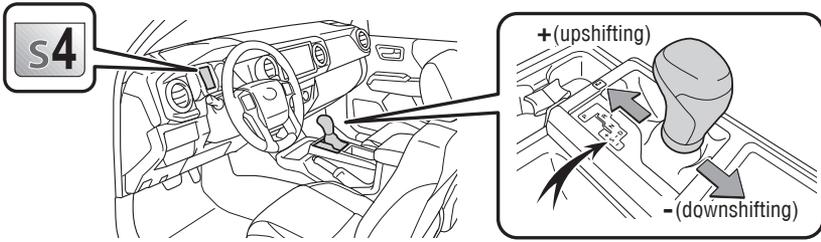


Selecting shift ranges using "S" mode restricts the upper limit of the possible gear ranges, controls engine braking forces and prevents unnecessary upshifting.

Manual transmission (if equipped)

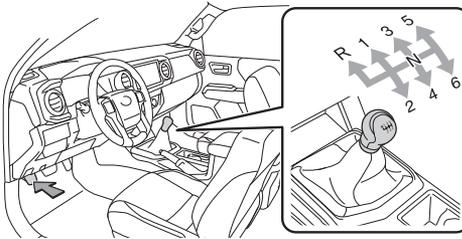

Four-wheel drive (if equipped)

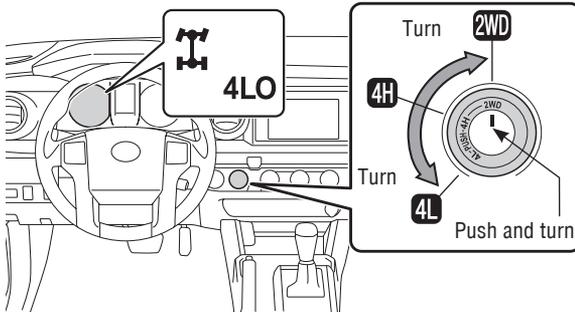

2WD High speed (2WD)


4H High speed (4WD); Shift when speed is below 62 mph.

4L Low speed (4WD); Shift into neutral while stopped, or depress clutch pedal at speeds below 2 mph.

For best fuel economy and performance under normal driving conditions, keep in "2WD" position.

FEATURES & OPERATIONS

Multi-terrain select (if equipped)

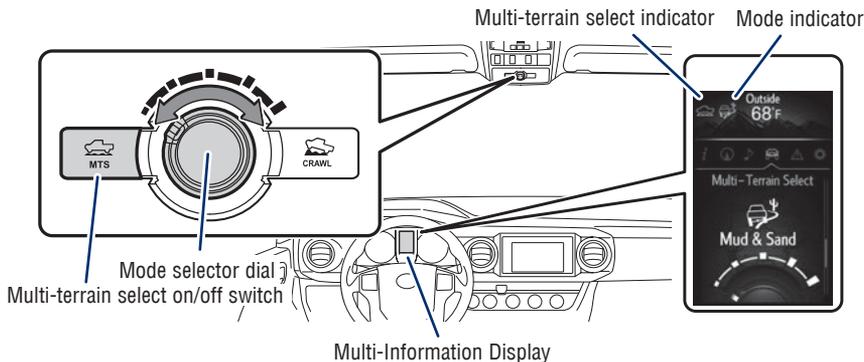


Improves driveability in off-road situations. Select one of five modes that most closely matches the terrain on which you are driving. Brake control can be optimized in accordance with the selected mode.

5 modes



Refer to Section 4-5 of the Owner's Manual for more information.


Crawl Control (if equipped)

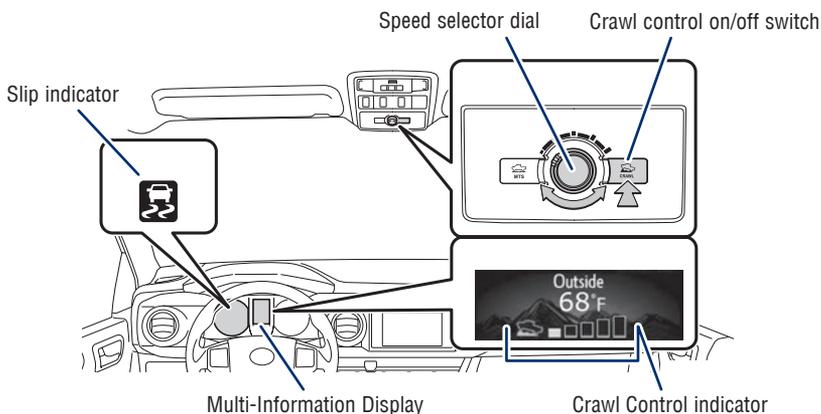

Allows travel on extremely rough off-road surfaces at a fixed low speed without pressing the accelerator or brake pedal.

Refer to Section 4-5 of the Owner's Manual for more information.

Clutch start cancel (if equipped)




The engine switch must be in the "ON" position.

The clutch start cancel switch allows you to start the engine and drive out of difficult situations where the vehicle should not be allowed to roll backwards.

Refer to Section 4-5 of the Owner's Manual for more information.


Tilt and telescopic steering wheel

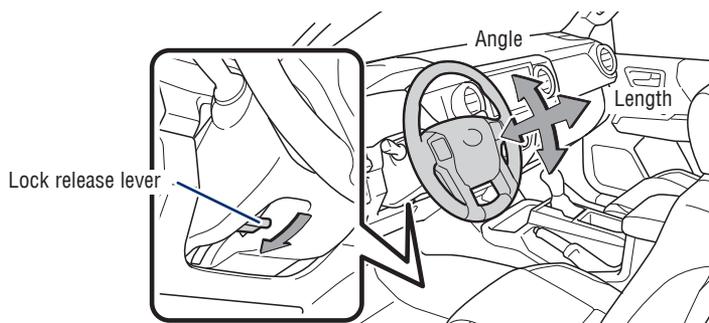

Hold wheel, push lever down, set angle and length, and return lever.

NOTE: Do not attempt to adjust while the vehicle is in motion.


Odometer and trip meter

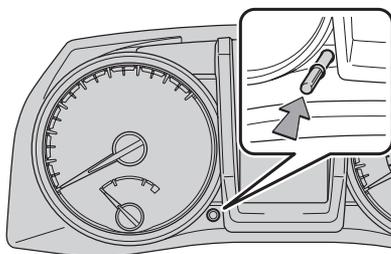

Push to switch display


Parking brake

Set



BRAKE

Release




Seats-Head restraints

ACCESS CAB


Separate seats-Front

Vertical adjustment



Separate-Rear

Folding

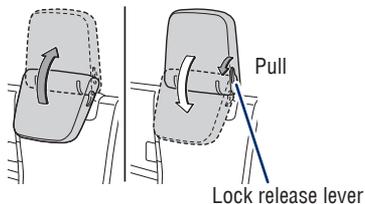

DOUBLE CAB


Separate seats-Front

Vertical adjustment




Rear

Vertical adjustment




Outer-Rear

Folding




Seats adjustments-Front

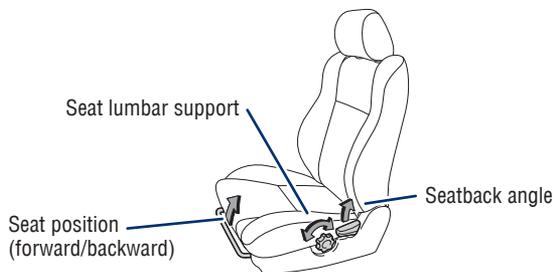


Rear seats-Folding

ACCESS CAB

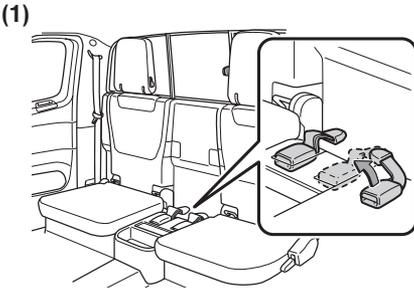


Stow the seat belt buckles.

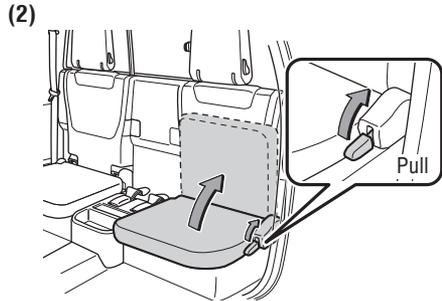


Raise the bottom cushion up while pulling the lever until it locks.


DOUBLE CAB

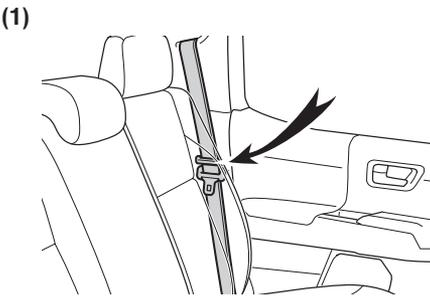


Pass the seat belt through the seat belt hangers.

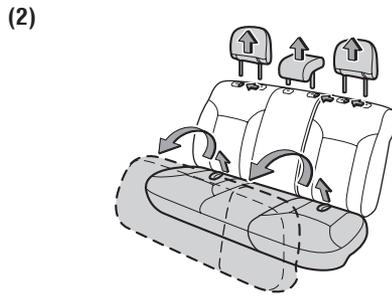

Remove head restraints and swing the bottom cushion.

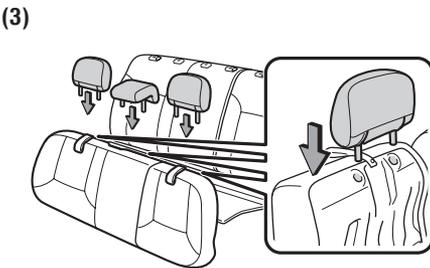

Attach the head restraints.




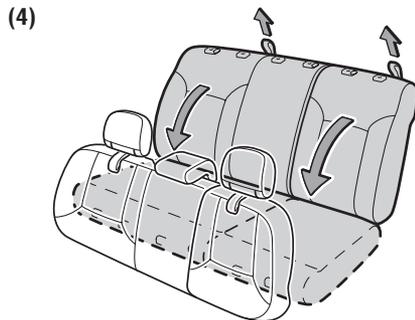


Pull lock release strap and fold down the seatback.

FEATURES & OPERATIONS

Lights & turn signals

HEADLIGHTS

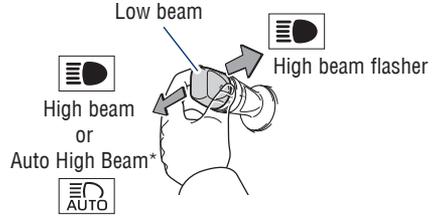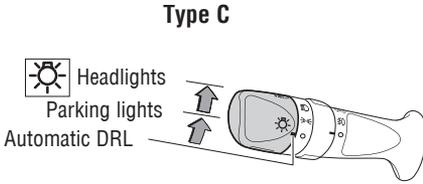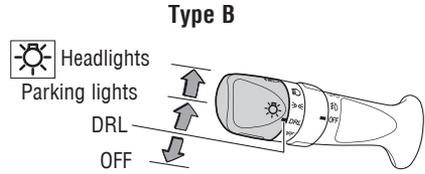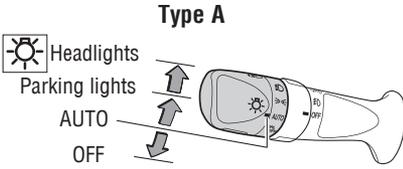

Daytime Running Light system Automatically turns on under certain conditions to make vehicle more visible to other drivers. Not for use at night.

Automatic light cutoff system Automatically turns lights off after 30 second delay, or lock switch on remote may be pushed after locking.


Automatic High Beam (AHB) system Automatically switches between high and low beams as appropriate to keep the high beam lamps on for as long as possible for enhanced vision at night.

Refer to *Toyota Safety Sense™ P (TSS-P)* in this guide or the *Owner's Manual* for more details on the Automatic High Beam feature.


* Operating conditions must be met. Refer to *Owner's Manual* for details.

FRONT FOG LIGHTS (IF EQUIPPED)

TURNING SIGNALS




Front fog lights come on only when the headlights are on low beam.

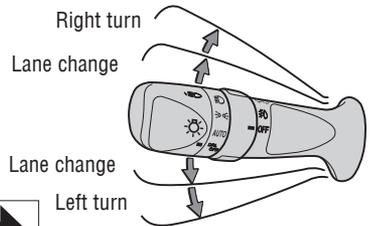


Windows-Power

Driver side


Type A (driver's side only)



Type B (front seat windows)



Window lock switch




Automatic down (type A)/up or down (type B) operation Push the switch completely down or pull it completely up and release to fully open or close. To stop the window partway, operate the switch in the opposite direction.

Window lock switch Deactivates all passenger windows. Driver's window remains operable.


Windshield wipers & washers

WITH INTERMITTENT WIPER

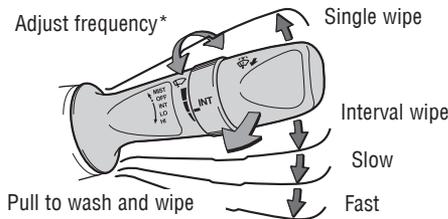

* **Intermittent windshield wiper frequency adjustment** Rotate to increase/decrease wiper frequency.


WITHOUT INTERMITTENT WIPER

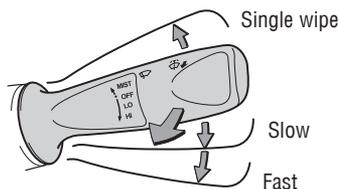


FEATURES & OPERATIONS

Audio

Entune™ Audio

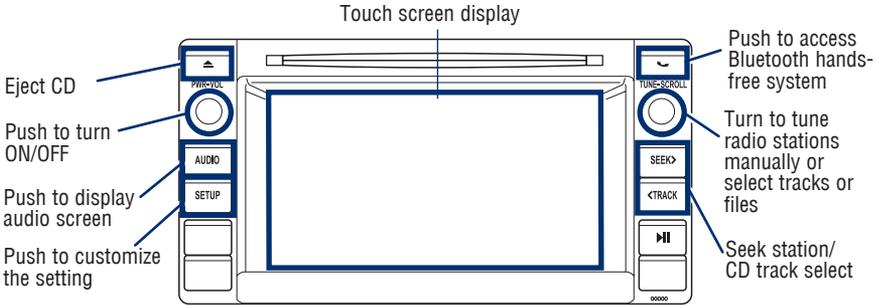


Entune™ Audio Plus

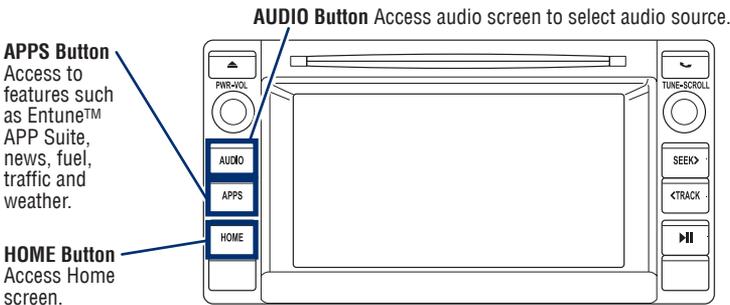

HOME SCREEN - The home screen offers a two and three panel layout. Information and layout will vary depending on selected set up.

Entune™ Premium (JBL®)* Audio with Integrated Navigation App Suite

* If equipped

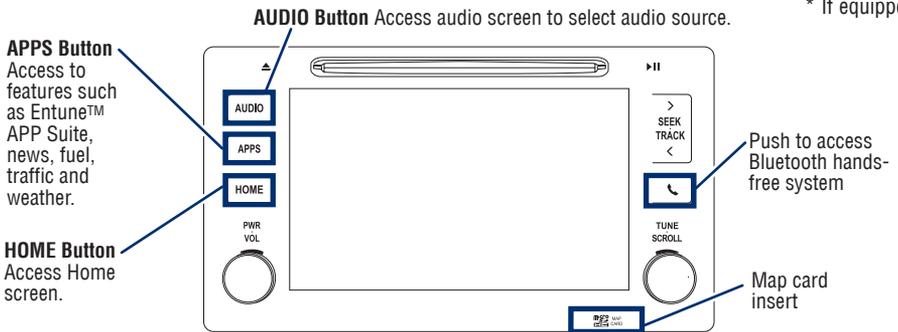

HOME SCREEN - The home screen offers a two and three panel layout. Information and layout will vary depending on selected set up.

NOTE: Concentrating on the road should always be your first priority while driving. Do not use the Entune system if it will distract you.


Refer to the "Navigation and Multimedia System Owner's Manual" and "2019 Entune™ Audio Quick Reference Guide."

Steering wheel switches & telephone controls (Bluetooth®)

“ ^ v ” Use to search within the selected audio medium (radio, CD, etc.).

“MODE/HOLD” Push to change audio source or push and hold to mute or pause current operation.

Start call/
Mobile Assistant
access*



Volume



Voice command switch

End call

Microphone

Type A (without moonroof)

Type B (with moonroof)

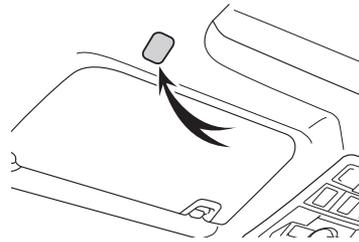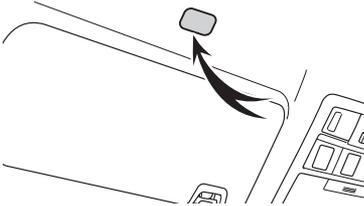

Bluetooth® technology allows dialing or receipt of calls without removing your hands from the steering wheel or using a cable to connect the compatible telephone and the system.

* Push and hold to access Mobile Assistant. When a compatible smartphone is Bluetooth® connected push and hold the off hook switch 2-3 seconds to access Siri® Eyes Free.

Refer to the “Bluetooth® Device Pairing Section” in this guide for more information about phone connections and compatibility.


Refer to the “Owner’s Manual” or the “Navigation and Multimedia System Owner’s Manual” for more details.

NOTE: Concentrating on the road should always be your first priority while driving. Do not use the Entune system if it will distract you.


FEATURES & OPERATIONS

USB media/AUX port


Type A



Type B



Type C




USB media port By connecting a USB-compatible portable audio device or USB memory stick into the USB media port, you can listen to music through the vehicle's speaker system.

AUX port By inserting an AUX cable into the AUX port, you can listen to music from a portable audio device through the vehicle's speaker system while in AUX mode.

Refer to the "Owner's Manual" or the "Navigation and Multimedia System Owner's Manual" for instructions and more information.

USB charge-ports

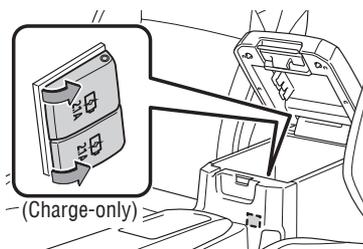

Auto lock/unlock

Automatic door locks can be programmed to operate in different modes, or turned OFF.

Shift position linked door locking/unlocking function

- Doors lock when shifting from Park.
- Doors unlock when shifting into Park.

Speed linked door locking function

- Doors lock when the vehicle speed is approximately 12 mph or higher.

Driver's door linked door unlocking function

- (Without a Smart Key) Doors unlock when the driver's door is opened within 10 seconds after turning the ignition switch to the "LOCK" position.
- (With a Smart Key) Doors unlock when the driver's door is opened within 10 seconds after turning the "ENGINE START STOP" switch OFF.


Refer to the Owner's Manual for more details.

Qi Wireless charger (if equipped)


Charging can only be performed with the engine switch in the “ACC” or “ON” position (without Smart Key)/ ACCESSORY or IGNITION ON mode (with Smart Key) and only on mobile devices with the “” logo.

(1)


Type A




Type B



Type C



(2)



Place device nearest the center of charging area for best results. Moving device may result in stopping or restarting the charging process.


A mobile device can be charged wirelessly on the tray. (1) Press the wireless charger power switch. (2) Place a mobile device on the tray as shown in the illustration. An amber indicator illuminates while charging is in progress. When charging is complete, the indicator illuminates green. Some phones, cases or cover type wireless chargers may not cause the green indicator to illuminate even though it is fully charged.

Refer to the Owner's Manual for more details on this system before attempting to use it.

FEATURES & OPERATIONS

Multi-Information Display (MID)

Push Multi-Information control switches to change information in the following:

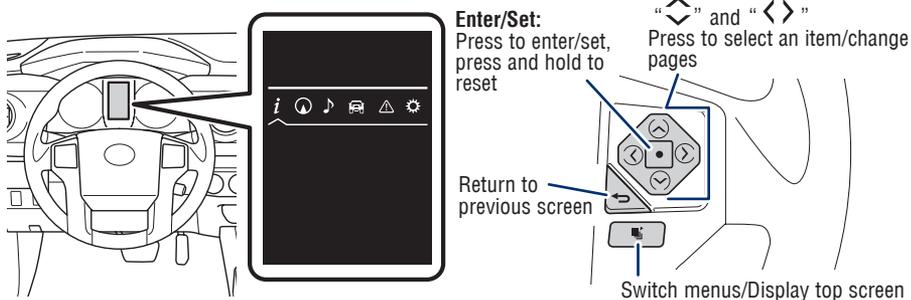

Push “DISP” to scroll through the following:


-  Drive information
-  Navigation system-linked display (if equipped)
-  Audio system-linked display
-  Vehicle information (if equipped)
-  Warning message display
-  Settings display

Refer to your Owner's Manual for complete details.

Moonroof (if equipped)


SLIDING OPERATION

Recommended driving position to minimize wind noise.

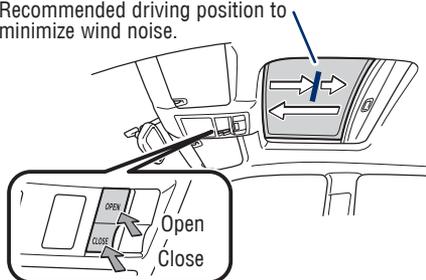

Push once to open partway; again to open completely.

TILTING OPERATION




Push once to open completely.

Lightly press either side of the moonroof switch while opening/tilting is in progress, the moonroof stops partway.

Air conditioning/heating

AUTOMATIC AIR CONDITIONING (IF EQUIPPED)

Display

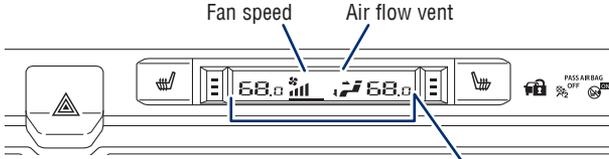


Temperature (Driver and passenger)

Selectors and switches

Airflow vent adjuster

In “”, “” or “” mode, use outside air (“” indicator OFF) to reduce window fogging. Recirculate cabin air (outside air when OFF)

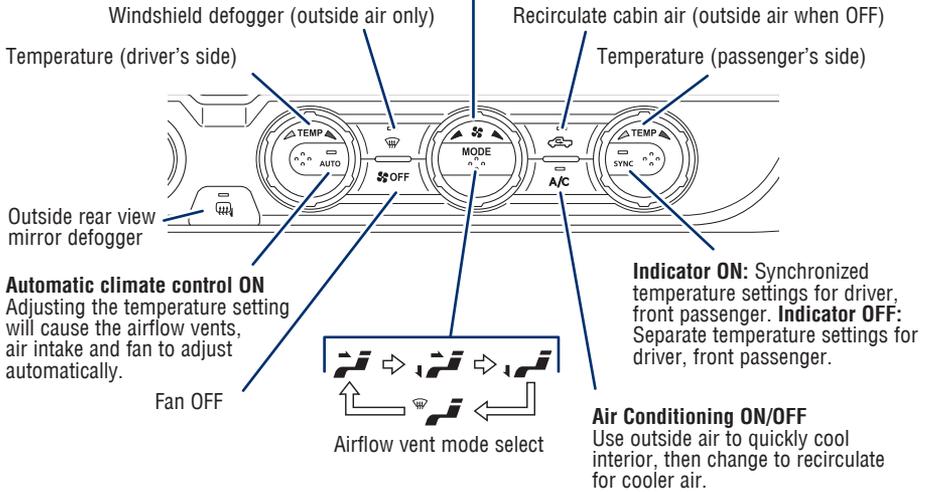


Automatic climate control ON
Adjusting the temperature setting will cause the airflow vents, air intake and fan to adjust automatically.

Indicator ON: Synchronized temperature settings for driver, front passenger. **Indicator OFF:** Separate temperature settings for driver, front passenger.

Air Conditioning ON/OFF
Use outside air to quickly cool interior, then change to recirculate for cooler air.

MANUAL AIR CONDITIONING (IF EQUIPPED)


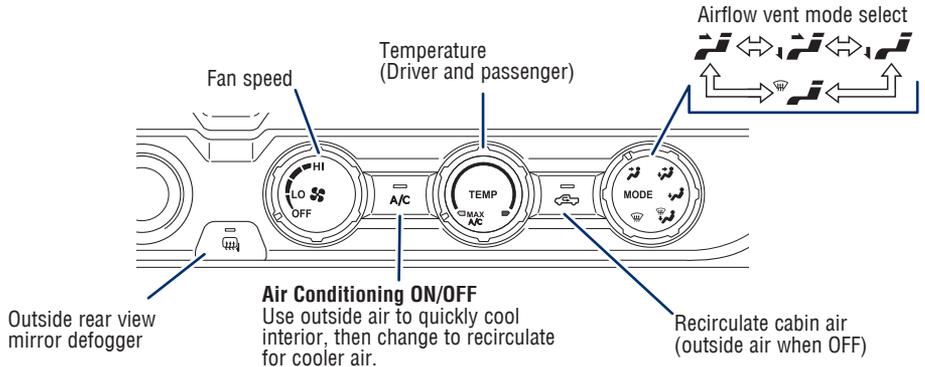


Air Conditioning ON/OFF
Use outside air to quickly cool interior, then change to recirculate for cooler air.

Recirculate cabin air (outside air when OFF)


FEATURES & OPERATIONS

Seat heaters (if equipped)

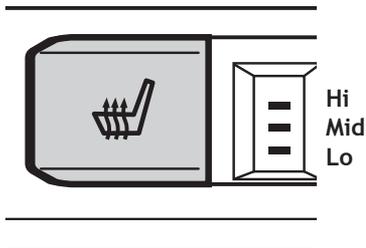

Press to **ON>Hi>Mid>Lo>OFF**

Clock

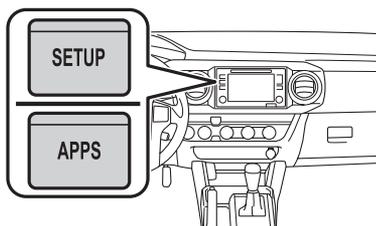

To find your system, refer to the Audio section of this guide,


For Entune™ Audio

Push “SETUP” button next to the screen then select “General” in the touch screen to access clock setting.


For Entune™ Audio Plus and Entune™ Premium (JBL®) Audio with Integrated Navigation App Suite

Push “APPS” button next to the screen, then select “General” in the touch screen to access clock setting.

Door locks


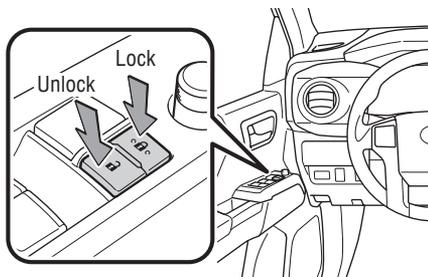


Power outlet-12V DC



Key must be in the "ACC" or "ON" position to be used.

Power outlet-120V AC

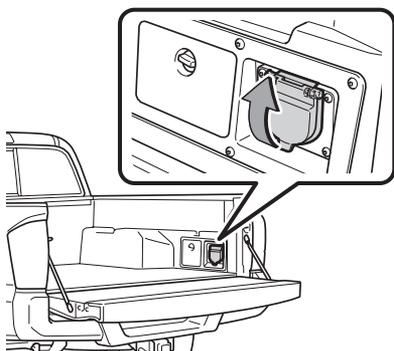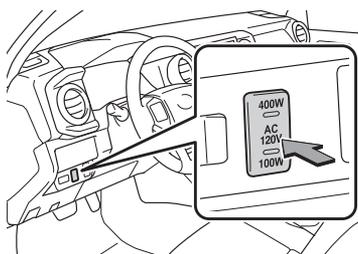

120 V AC/400 W




120 V AC/100 W


The power outlet can be used when the engine is running.

Refer to the Owner's Manual for more details.

Trailer lights



Use wire harness to connect trailer lights.




Use service connector for the trailer brake controller.
(With a towing package)

Refer to the Owner's Manual for more details.

FEATURES & OPERATIONS

Active traction control (if equipped)



The active traction control system automatically helps prevent the spinning of four wheels when the vehicle is started or accelerated on slippery road surfaces.


Refer to the Owner's Manual for more information.

TRAC/VSC OFF switch



TRAC
OFF


AUTO
LSD



The TRAC OFF switch is used to switch between modes related to the TRAC, VSC and Auto LSD functions.

Refer to the Owner's Manual for limitations and more information.


Rear differential lock (if equipped)



Use **ONLY** when wheel spinning occurs in a ditch, or on slippery or unpaved surfaces. **DO NOT USE THE REAR DIFFERENTIAL LOCK IN CONDITIONS OTHER THAN THOSE SPECIFIED IN THE OWNER'S MANUAL. UNLOCK THE DIFFERENTIAL ONCE THE VEHICLE MOVES OUT OF THE TROUBLE SPOT.**

Refer to your Owner's Manual for complete details on this system before attempting to use it.

Garage door opener (HomeLink®*) (if equipped)

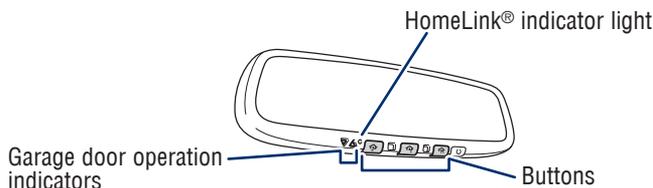


Garage door openers manufactured under license from HomeLink®* can be programmed to operate garage doors, estate gates, security lighting, etc.

Refer to "Garage door opener," Section 6-4 in the Owner's Manual for more details.

For programming assistance, contact HomeLink® at 1-800-355-3515, or visit <http://www.homelink.com>.

* HomeLink® is a registered trademark of Johnson Controls, Inc.

Blind Spot Monitor with Rear Cross Traffic Alert (BSM w/RCTA) (if equipped)

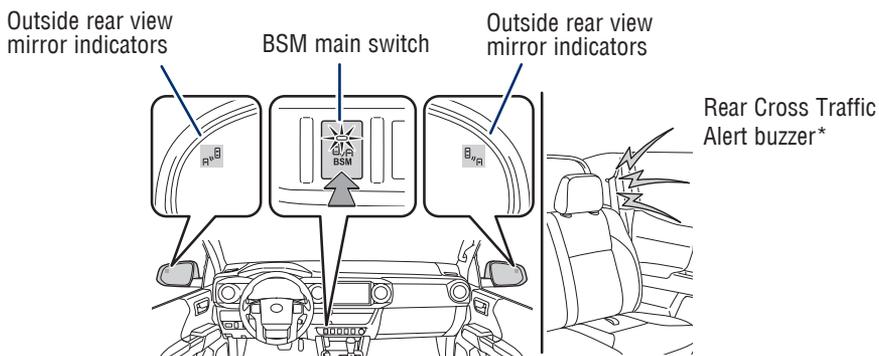

The Blind Spot Monitor is a system that has two functions:

- The Blind Spot Monitor function (assists the driver in making the decision when changing lanes)
- The Rear Cross Traffic Alert function (assists the driver when backing up)


The system is designed to use radar sensors to detect vehicles traveling in the Tacoma's blind spot and advises the driver of the vehicles' presence via the outside rear view mirror indicators.

*Rear Cross Traffic Alert function only.


Refer to the Owner's Manual for limitations and more details on this system before attempting to use it.

FEATURES & OPERATIONS


Windows-Power Sliding Rear window (if equipped)

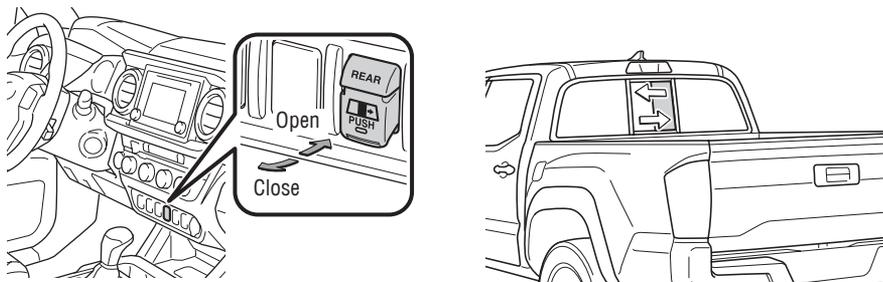


Intelligent parking assist (if equipped)

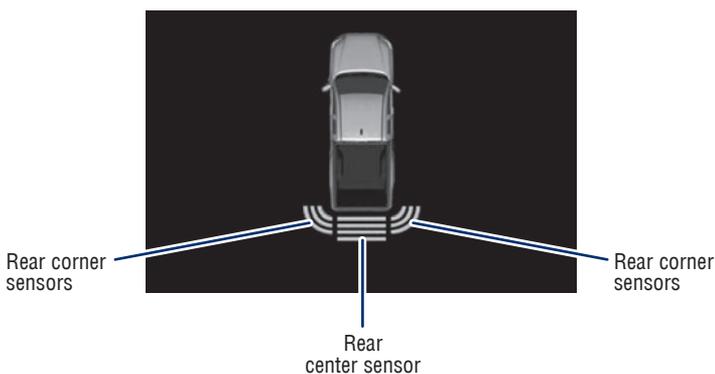

Type A





Type B



If the sensors detect an obstacle, the buzzer and MID display informs the driver of the approximate position and distance of the obstacle by illuminating continuously (far) or blinking (near). Depending on your Entune™ Audio system, you can adjust settings.

Refer to section *Intuitive parking assist* in the *Owner's Manual* for more details.

Rear view monitor system




The rear view monitor system displays an image of the view from the bumper of the rear area of the vehicle. The camera for the rear view monitor system is integrated in the tailgate handle.

To adjust the image on the rear view monitor screen, press the “SETUP” button and select “Display” on the “Setup” screen. Select “Camera” to adjust the screen contrast and brightness.

Refer to the *Owner's Manual and Navigation and Multimedia System Owner's Manual* for limitations and more details on this system.


Steering lock release

Without Smart Key system

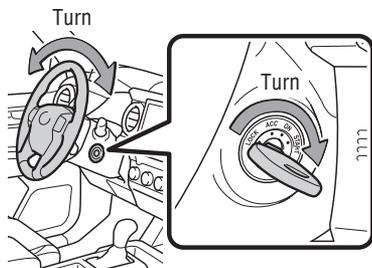

When starting the engine, the engine switch may seem stuck in the “LOCK” position. To free it, turn the key while turning the steering wheel slightly left and right.

With Smart Key system

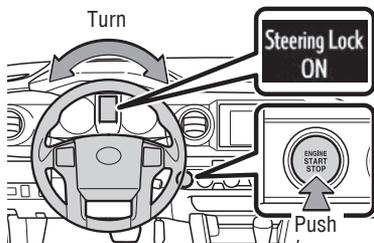

A message will be displayed on the multi-information display.

Check that the shift lever is in P. Press the engine switch while turning the steering wheel left and right.

Quick overview-Toyota Safety Sense™ P (TSS-P)

Toyota Safety Sense™ P (TSS-P) is a set of active safety technologies designed to help mitigate or prevent collisions across a wide range of traffic situations, in certain conditions. TSS-P is designed to help support the driver's awareness, decision making and vehicle operation contributing to a safe driving experience.


Refer to the Owner's Manual for operation, setting adjustments, limitations and more details to understand these functions and complete safety precautions. For more information, please go to <http://www.toyota.com/safety-sense>



Pre-Collision System with Pedestrian Detection (PCS w/PD)

PCS w/PD is designed to provide alert, mitigation, and/or avoidance support in certain conditions, when the system detects a potential collision with a preceding vehicle is likely to occur.

The advanced millimeter-wave radar sensor system is designed to work with the camera sensor to help recognize a preceding pedestrian, and provide an alert, mitigation and/or avoidance support in certain conditions.



Lane Departure Alert (LDA)

LDA is designed to provide notification when the system detects an unintended lane departure.



Dynamic Radar Cruise Control (DRCC)

DRCC is designed to help maintain a pre-set distance to a preceding vehicle when the preceding vehicle is traveling at a lower speed.




Automatic High Beams (AHB)


AHB is designed to detect the headlights of oncoming vehicles and the tail lights of preceding vehicles and switch between high beams and low beams as appropriate.

Sensors

TSS-P combines an in-vehicle camera mounted in front of the inside rear view mirror and a millimeter-wave radar mounted in the front grill. These sensors support the driver assist systems.

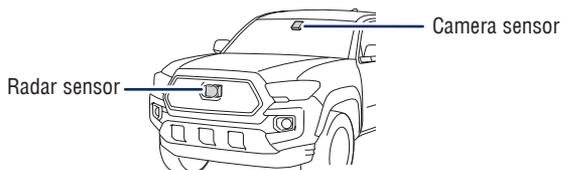

Pre-Collision System with Pedestrian Detection (PCS w/PD)

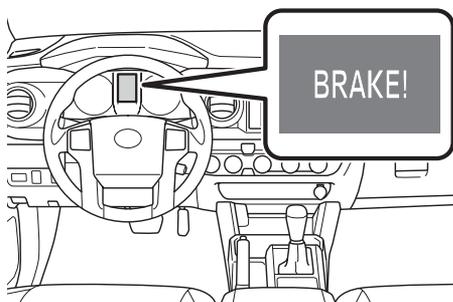

The Pre-Collision System uses a radar sensor and camera sensor to help detect a vehicle or pedestrian in front of your vehicle.

As there is a limit to the degree of recognition accuracy and control performance that this system can provide, do not overly rely on this system. This system will not prevent collisions or lessen collision damage or injury in every situation. Do not use PCS instead of normal braking operations under any circumstances. Do not attempt to test the operation of the pre-collision system yourself, as the system may not operate or engage, possibly leading to an accident. In some situations, such as when driving in inclement weather such as heavy rain, fog, snow or a sandstorm or while driving on a curve and for a few seconds after driving on a curve, a vehicle may not be detected by the radar and camera sensors, preventing the system from operating or engaging properly.

Refer to a Toyota Owner's Manual for a list of additional situations in which the system may not operate properly.

Pre-Collision Warning

When the system determines that the possibility of a frontal collision is high, a buzzer will sound and a warning message will be displayed on the Multi-Information Display (MID) to urge the driver to take evasive action.

Pre-Collision Brake Assist

If the driver notices the hazard and brakes, the system may provide additional braking force using Brake Assist. This system may prime the brakes and may apply greater braking force in relation to how strongly the brake pedal is depressed.

Pre-Collision Braking


If the driver does not brake in a set time and the system determines that the possibility of a frontal collision with a preceding vehicle is extremely high, the system may automatically apply the brakes, reducing speed in order to help the driver reduce the impact and in certain cases avoid the collision.

Refer to a Toyota Owner's Manual for additional information on PCS w/PD operation, settings adjustments, limitations, and precautions before attempting to use it.

TOYOTA SAFETY SENSE™

PCS PEDESTRIAN DETECTION


Under certain conditions, the PCS system included with the TSS-P package may also help to detect a pedestrian in front of your vehicle using the in-vehicle camera and front-grill mounted millimeter wave radar. The in-vehicle camera of PCS detects a potential pedestrian based on size, profile, and motion of the detected pedestrian. However, a pedestrian may not be detected depending on the conditions, including the surrounding brightness and the motion, posture, size, and angle of the potential detected pedestrian, preventing the system from operating or engaging.

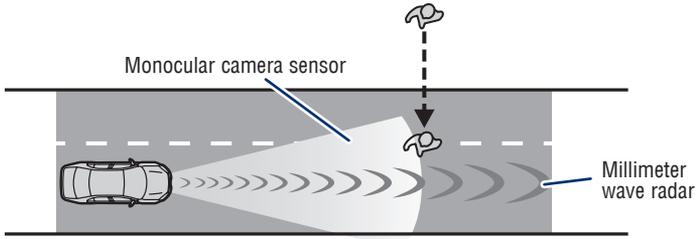

As part of the Pre-Collision System, this function is also designed to first provide an alert and then automatic braking if needed.


Refer to a Toyota Owner's Manual for additional limitations and information.

CHANGING PCS ALERT TIMING

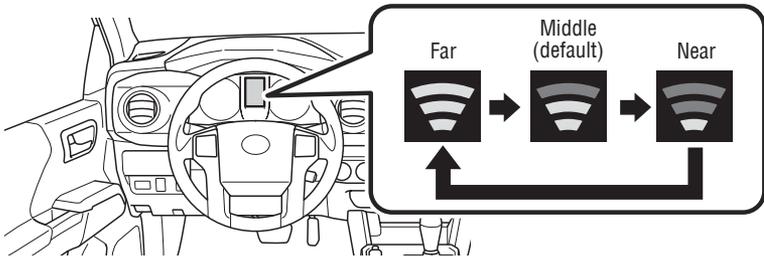

- (1) Press “<>” switches and select  from the Multi-Information Display (MID).
- (2) Press “<” switches and select “PCS” and then press “


Note: PCS is enabled each time the engine switch is turned to Ignition On. The system can be disabled/enabled and the alert timing of the system can be changed. (Alert timing only, brake operation remains the same).

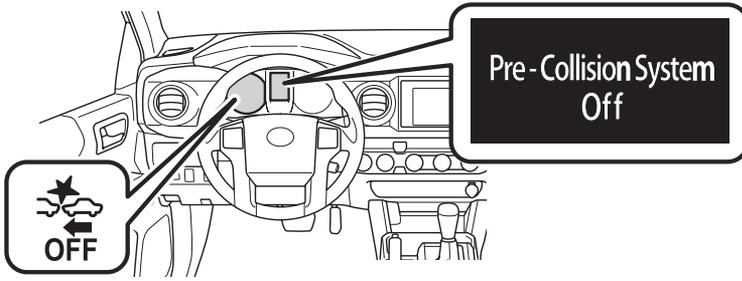

- (1) Press “<>” switches and select  from the Multi-Information Display (MID).
- (2) Press “<” switches and select “PCS” from the MID and then press “”.
- (3) Press “>” switches and select “PCS” and then press “” to select the desired setting ON/OFF.
- (4) Press “<” to go back to the menu. Also, use “” to switch menus or display top screen.

Refer to a Toyota Owner's Manual for additional information on PCS operation, settings adjustments, limitations, and precautions before attempting to use it.

Lane Departure Alert (LDA)

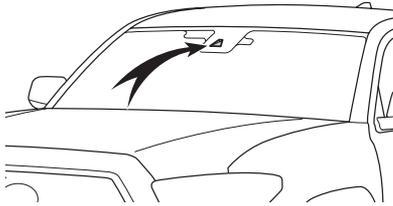


LDA in TSS-P uses an in-vehicle camera designed to detect visible white and yellow lane markers in front of the vehicle and the vehicle's position on the road. If the system determines that the vehicle is starting to unintentionally deviate from its lane, the system alerts the driver with an audio and visual alert. When the alerts occur, the driver must check the surrounding road situation and carefully operate the steering wheel to move the vehicle back to the center part of their lane.

LDA is designed to function at speeds of approximately 32 mph (50 km/h) or higher on relatively straight roadways.

TOYOTA SAFETY SENSE™

TURNING THE LDA SYSTEM ON/OFF

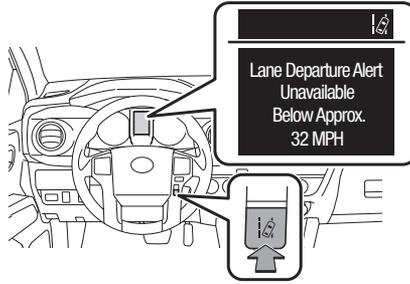

Press the LDA switch to turn the LDA system on. Depress again to turn it off.

Note: Operation of the LDA system and setting adjustments continues in the same condition regardless of ignition cycle until changed by the driver or the system is reset.

Refer to a Toyota Owner's Manual for additional information on LDA operation, settings adjustments, limitations, and precautions before attempting to use it.

LANE DEPARTURE ALERT

LDA function display




Lane makers

Lane Departure Alert (LDA) indicator's illumination shows the system operation status.



(1)

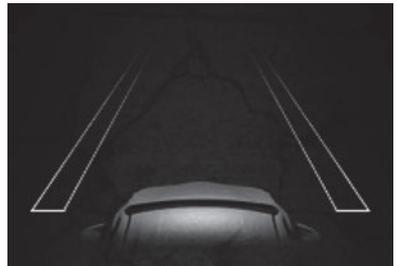

(2)

LANE DEPARTURE ALERT (CONTINUED)

The LDA function  displays when the Multi-Information Display (MID) is switched to the driving assist system information screen.

(1) The system displays solid white lines on the LDA indicator when visible lane markers on the road are detected. A side flashes orange to alert the driver when the vehicle deviates from its lane.

(2) The system displays outlines on the LDA indicator when lane markers on the road are not detected or the function is temporarily cancelled.

Note: When operation conditions are no longer met, a function may be temporarily canceled. However, when the operation conditions are met again, operation of the function is automatically restored. For example, LDA may not function on the side(s) where white/yellow lines are not detectable.

ADJUSTING LDA ALERT SENSITIVITY

The driver can adjust the sensitivity of the LDA (warning) function from the Multi-Information Display (MID) customization screen.

High - Is designed to warn approximately before the front tire crosses the lane marker.

Normal - Is designed to warn approximately when the front tire crosses the lane marker.

(1) Press "SETUP" or "APPS" switches on the multimedia system.

If you have Entune Audio Plus, select "Setup" on the "Apps" screen.

(2) Select "Vehicle" on the "Setup" screen.

(3) Select "Vehicle Customization" on the "Vehicle Settings" screen.

(4) Choose a category to display the settings.

(5) Select the setting to be changed.


(6) Select "+" or "-" to choose the desired level, then select "OK."

Note: Operation of the LDA system and setting adjustments continues in the same condition regardless of Ignition cycle until changed by the driver or the system is reset.

SWAY WARNING SYSTEM



Continuous lane deviations from swaying.



Gentle swaying from driver's inattentiveness.



Acute steering wheel operation after the number of operations decrease due to driver's inattentiveness.

SWS is a function of LDA and is designed to detect swaying based on the vehicle location in the lane and the driver's steering wheel operation. To help prevent swaying, the system alerts the driver using a buzzer sound and a warning displays in the MID.

DISABLING LDA SWAY WARNING SYSTEM

- (1) Press “<>” switches and select  from the Multi-Information Display (MID).
- (2) Press “◇” switches and select the  setting function and then press “□.”
- (3) Press “↶” to go back to the menu. Also, use “” to switch menus or display top screen.


ADJUSTING SWAY ALERT SENSITIVITY

- (1) Press “SETUP” or “APPS” switches on the multimedia system.
If you have Entune Audio Plus, select “Setup” on the “Apps” screen.
- (2) Select “Vehicle” on the “Setup” screen.
- (3) Select “Vehicle Customization” on the “Vehicle Settings” screen.
- (4) Choose a category to display the settings.
- (5) Select the setting to be changed.
- (6) Select “+” or “-” to choose the desired level, then select “OK.”

Note: Operation of the LDA system and setting adjustments continues in the same condition regardless of ignition cycle until changed by the driver or the system is reset.

Dynamic Radar Cruise Control (DRCC)

DRCC helps maintain a pre-set distance to a preceding vehicle when the preceding vehicle is traveling at a lower speed. This mode is always selected first when the cruise control button is depressed. Constant speed cruise control mode is also available.

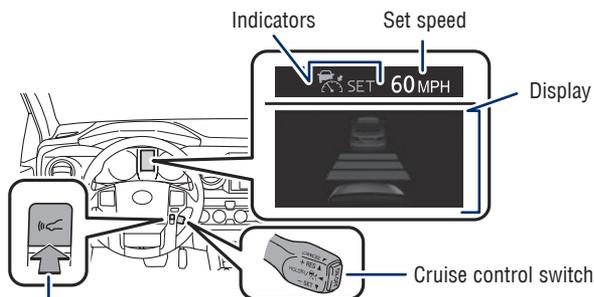


Dynamic Radar Cruise Control vehicle-to-vehicle distance button

TURNING SYSTEM ON/OFF



(1)




Push once: On
Push again: Off

Refer to page 39 for switching to Constant Speed (Cruise) Control Mode.


ADJUSTING SET SPEED



(2)



(3)




Vehicle will cruise at a set speed, decelerate to maintain selected distance from a slower vehicle traveling in front and accelerate back up to the selected speed if the vehicle in front changes lanes or speeds up.

- (1) Push the ON-OFF button. The “RADAR READY” or “” indicator will come on.
- (2) Push the lever down to SET speed, push it up to Resume and pull it or depress brake to Cancel.
- (3) Push up to increase the set speed, push down to decrease (1 mph [1.6 km/h] or 1 km/h [0.6 mph] increments).

¹ The set speed may also be cancelled by depressing the brake pedal.

² The set speed may be resumed once vehicle speed exceeds 25 mph (40 km/h).

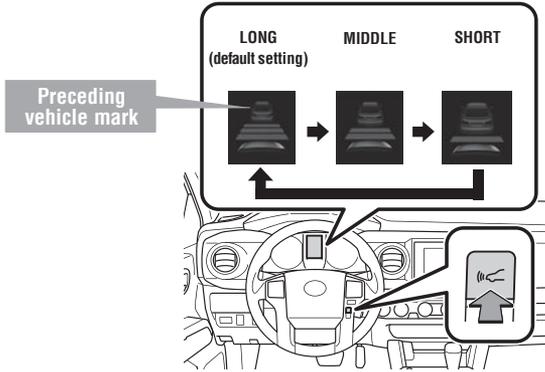


To change the vehicle-to-vehicle distance

Push the “” button to cycle through the settings, which will change progressively.

This mode employs a radar sensor to detect the presence of a preceding vehicle up to approximately 328 ft (100 m) ahead, determines the current vehicle-to-vehicle following distance and operates to maintain a preset following distance from the vehicle ahead. These distances vary based on vehicle speed.

Note: Vehicle-to-vehicle distance will close in when traveling on long downhill slopes.

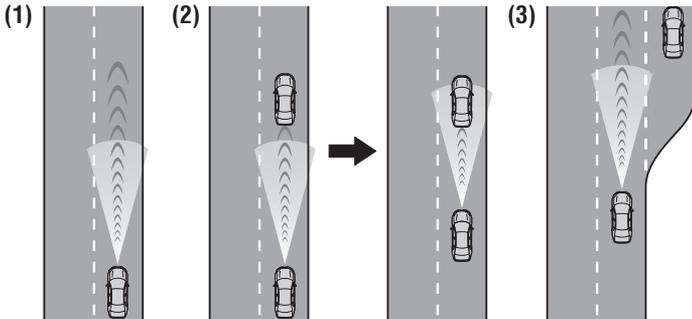

(1) Constant speed cruising when there are no vehicles ahead

The vehicle travels at the speed set by the driver. The desired vehicle-to-vehicle distance can also be set by operating the vehicle-to-vehicle distance control.

(2) Deceleration cruising and follow-up cruising when a preceding vehicle driving slower than the set speed appears

When a vehicle is detected running ahead of you, the system automatically decelerates your vehicle. When a greater reduction in vehicle speed is necessary, the system applies the brakes (the brake lights will come on at this time). The system will respond to changes in the speed of the vehicle ahead in order to maintain the vehicle-to-vehicle distance set by the driver. A warning tone warns you when the system cannot decelerate sufficiently to prevent your vehicle from closing in on the vehicle ahead.

DRCC ADJUSTING DISTANCE (CONTINUED)


(3) Acceleration when there are no longer any preceding vehicles driving slower than the set speed

The system accelerates until the set speed is reached. The system then returns to constant speed cruising.

Note: When your vehicle is too close to a vehicle ahead, and sufficient automatic deceleration via the cruise control is not possible, the display will flash and the buzzer will sound to alert the driver. An example of this would be if another driver cuts in front of you while you are following a vehicle. Depress the brake pedal to ensure an appropriate vehicle-to-vehicle distance.

SWITCHING TO CONSTANT SPEED (CRUISE) CONTROL MODE


(1)

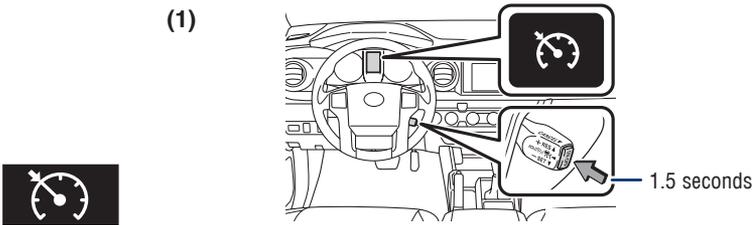

If you are already using DRCC “”, push button again to turn the system off first, then push and hold button for at least 1.5 seconds to switch.

Note: When the engine is turned off, it will automatically default to DRCC.


SETTING CONSTANT SPEED (CRUISE) CONTROL

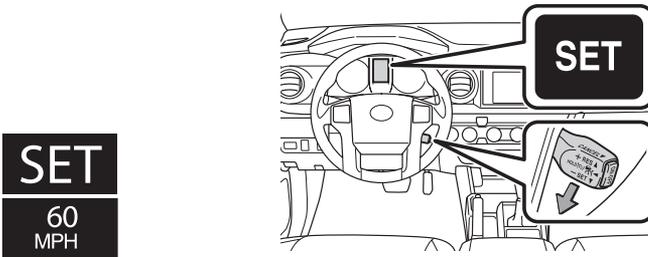

To adjust speed or cancel, see steps (2) and (3) of ADJUSTING SET SPEED on page 37.

Refer to a Toyota Owner's Manual for additional information on DRCC operation, settings adjustments, limitations, and precautions before attempting to use it.

Automatic High Beams (AHB)

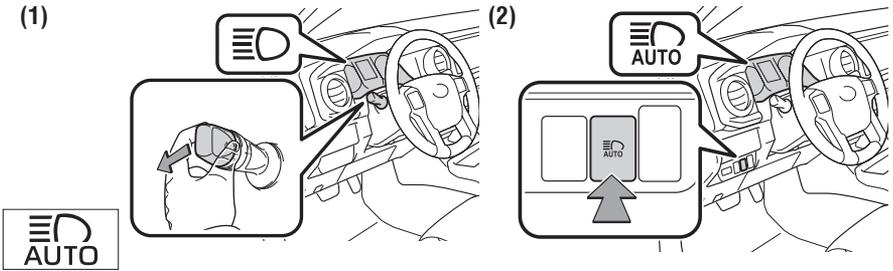

AHB is a safety system designed to help drivers see more of what's ahead at nighttime and reduce glare for oncoming drivers. When enabled, AHB uses an in-vehicle camera to help detect the headlights of oncoming vehicles and tail lights of preceding vehicles, then automatically switches between high and low beams as appropriate to provide the most light possible and enhance forward visibility. By using high beams more frequently, the system may allow earlier detection of pedestrians and obstacles.

Refer to the Toyota Owner's Manual for additional information on AHB operation, settings adjustments, limitations, and precautions before attempting to use it.

ACTIVATING THE AHB SYSTEM

- (1) With the engine switch in IGNITION ON mode, turn the headlight switch to "☰☷" or "AUTO" (if equipped) position.
- (2) Push lever away from you.
- (3) Press the "☰☷ AUTO" switch.

The AHB indicator will come on when the headlights are turned on automatically to indicate that the system is active.

Note: Pull the lever back toward you to turn the AHB system off.

The AHB indicator will turn off. To turn switch to "☰☷" position and the manual high beam indicator "☰☷" turns on.

CONDITIONS WHERE AHB WILL TURN ON/OFF AUTOMATICALLY


When all of these conditions are met, high beams will be automatically turned on (after approximately 1 second):

- Vehicle speed is above approximately 21 mph (34 km/h.)
- The area ahead of the vehicle is dark.
- There are no oncoming or preceding vehicles with headlights or tail lights turned on.
- There are few street lights on the road ahead.

If any of these conditions occur, the system is designed to automatically turn off high beams:

- Vehicle speed drops below approximately 17 mph (27 km/h.)
- The area ahead of the vehicle is not dark.
- Oncoming or preceding vehicles have headlights or tail lights turned on.
- There are many streetlights on the road ahead.


Seat belts

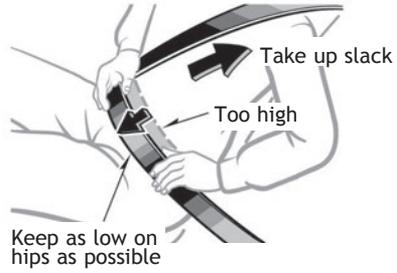

NOTE: If a passenger's seat belt is fully extended, then retracted even slightly, the Automatic locking retractor (ALR) will prevent it from being re-extended beyond that point, unless fully retracted again. This feature is used to help hold child restraint systems securely.


To find more information about seat belts, and how to install a child restraint system, refer to the Owner's Manual.

Seat belts-Shoulder belt anchor

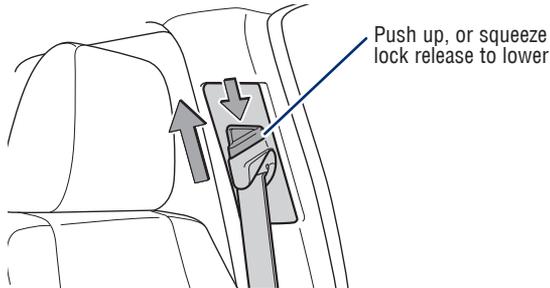

SAFETY & EMERGENCY FEATURES

Tire Pressure Monitoring (warning) System (TPMS)

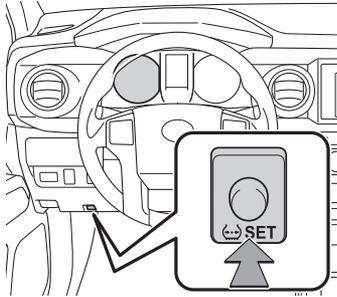

After adjusting tire pressures, or after tires have been rotated or replaced, turn the ignition switch to “ON” and press and hold the “SET” button until indicator blinks three times. Drive the vehicle at approximately 25 mph or more for approximately 10 minutes.

Refer to the load label on the door jamb or the Owner’s Manual for tire inflation specifications.

The tire pressure detected by the tire pressure warning system can be displayed on the multi-information display. (Available on select grades.)


If the tire pressure indicator flashes for more than 60 seconds and then remains on, take the vehicle to your local Toyota dealer.

NOTE: The warning light may come on due to temperature changes or changes in tire pressure from natural air leakage. If the system has not been initialized recently, setting the tire pressures to factory specifications should turn off the light.

Refer to the Owner’s Manual for more details on TPMS.

Rear door child safety locks (double cab only)

Rear door

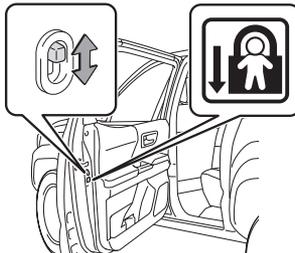


Moving the lever to “LOCK” will allow the door to be opened only from the outside.


Spare tire & tools

TOOL LOCATION

Double cab models
-under the rear seat

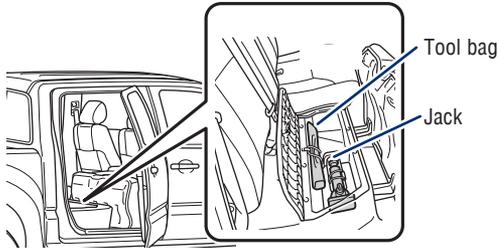


Access cab models
-under the rear seat

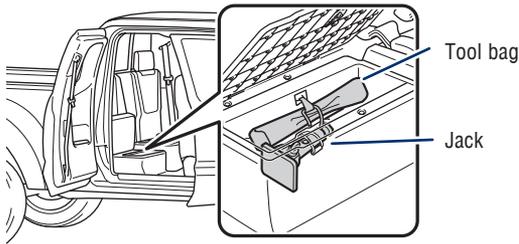


REMOVING THE SPARE TIRE


Assemble the jack handle.

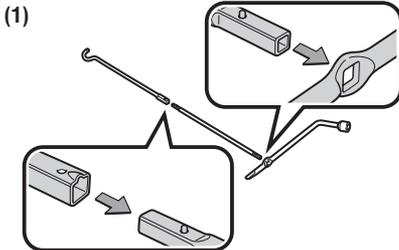

Insert the jack handle end into the lowering screw.

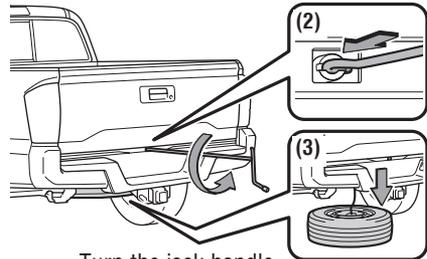

Turn the jack handle counterclockwise.



Refer to the Owner's Manual for tire changing and jack positioning procedures.

SAFETY & EMERGENCY FEATURES

Star Safety System™

Your vehicle comes standard with the Star Safety System™, which combines Anti-lock Braking System (ABS), Brake Assist (BA), Electronic Brake-force Distribution (EBD), Smart Stop Technology (SST), Traction Control (TRAC) and Vehicle Stability Control (VSC).

Refer to the Owner's Manual for more details and important information on limitations to these systems.

ANTI-LOCK BRAKE SYSTEM (ABS)

Toyota's ABS sensors detect which wheels are locking up and limits wheel lockup by "pulsing" each wheel's brakes independently. Pulsing releases brake pressure repeatedly for fractions of a second. This helps the tires attain the traction that current road conditions will allow, helping you to stay in directional control.

BRAKE ASSIST (BA)

Brake Assist is designed to detect sudden or "panic" braking, and then add braking pressure to help decrease the vehicle's stopping distance. When there's only a split second to react, Brake Assist can add additional brake pressure more quickly than just the driver alone can.

ELECTRONIC BRAKE FORCE DISTRIBUTION (EBD)

Toyota's ABS technology has Electronic Brake-force Distribution (EBD) to help maintain control and balance when braking. EBD responds to sudden stops by redistributing brake force to enhance the braking effectiveness of all four wheels.

SMART STOP TECHNOLOGY (SST)

Smart Stop Technology automatically reduces engine power when the accelerator and brake pedals are pressed simultaneously under certain conditions.

SST engages when the accelerator is depressed first and the brakes are applied firmly for longer than one-half second at speeds greater than five miles per hour.

SST doesn't engage if the brake pedal is depressed before the accelerator pedal, allowing vehicles to start on a steep hill and safely accelerate without rolling backward.

VEHICLE STABILITY CONTROL (VSC)

VSC helps prevent loss of traction during cornering by reducing engine power and applying brake force to selected wheels.

Toyota's VSC monitors steering angle and the direction your vehicle is traveling. When it senses that the front or rear wheels begin to lose traction, VSC reduces engine power and applies braking to selected wheels. This helps restore traction and vehicle control.

TRACTION CONTROL (TRAC)

VSC helps prevent loss of traction during cornering by reducing engine power, and Traction Control helps maintain traction on loose gravel and wet, icy, or uneven surfaces by applying brake force to the spinning wheel(s).




Toyota's TRAC sensors are activated when one of the drive wheels starts to slip. TRAC limits engine output and applies the brakes to the spinning wheel. This transfers power to the wheels that still have traction to help keep you on track.

Floor mat installation

There are two types of Toyota floor mats: carpeted and all-weather. Each vehicle has model-specific floor mats. Installation is easy.

To keep your floor mat properly positioned, follow these steps:

- Only use Toyota floor mats designed for your specific model.
- Use only one floor mat at a time, using the retaining hooks to keep the mat in place.
- Install floor mats right side up.

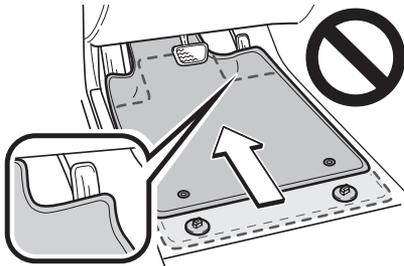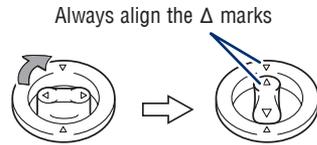

BLUETOOTH® DEVICE PAIRING SECTION


Do not attempt the Bluetooth® Pairing process while driving.

To begin the Bluetooth® Pairing process, press the HOME button on the faceplate of your Toyota Vehicle Entune™ Multimedia Head Unit.¹


Bluetooth® Pairing for Android phone and Entune™ touch screen system

Pairing your phone is the first step in connecting with your Toyota for hands-free calling and for audio streaming via Bluetooth. This pairing process is quick and easy: all Android mobile digital devices have Bluetooth integrated; all you have to do is setup the phone and multimedia system to “talk” to each other and form a connection.²

Initiate Bluetooth® on your Android®



STEP 1
From your **APPS SCREEN**, select **SETTINGS**.



STEP 2
Select **CONNECTIONS** and select **BLUETOOTH**.



STEP 3
Ensure **BLUETOOTH** is **ON**.



STEP 4
Select **YOUR PHONE DEVICE** to make it discoverable.

Phone will seek out Bluetooth devices while remaining discoverable.



STEP 5
While your Android device is seeking out Bluetooth devices, proceed to your Entune Multimedia Head Unit on your Toyota vehicle.

¹ To determine which head unit is installed in your vehicle, refer to the Audio section in this guide. Entune™ Premium Audio screens are shown in this section. Screens and features may vary by Entune™ system.

² Some Android devices may have slightly different SETTINGS screen layout depending on manufacturer of device and Android OS version.

BLUETOOTH® DEVICE PAIRING

Initiate Bluetooth® on your Entune™ Multimedia Head Unit

Once you have Bluetooth enabled on your phone and ready to pair, you will need to initiate Bluetooth on your Entune head unit. Please follow the instructions below to pair your Bluetooth enabled phone to your Entune system.




STEP 6

On your Toyota Vehicle Entune Multimedia Head Unit, Select **SETUP BUTTON** on the Home Screen.



STEP 7


Select **BLUETOOTH**.
Image shown is a sample image, features may vary.



STEP 8

Select **ADD**, to add your phone device.

For Entune™ Audio System, press the **SETUP BUTTON** on the faceplate to access the Setup Screen.



STEP 9

Back on your smartphone, you can now select your **TOYOTA VEHICLE** in Bluetooth Settings.

You may need to enter the provided Bluetooth PIN on your phone.



STEP 10


Your smartphone is now paired with Entune.



STEP 11

Once paired, Entune will attempt to connect audio and contacts on your phone.

Initiate Bluetooth® on your Entune™ Multimedia Head Unit

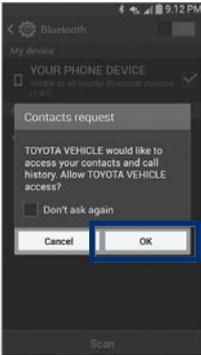

STEP 12

Using your smartphone, you will need to allow Entune access to your messaging and contacts.

It is recommended to check the "Don't ask again" box, so as not to have to press OK every time the phone makes a Bluetooth connection with your Toyota.

STEP 13

A confirmation will appear once your phone has been paired and connected.

Additional Resources

If you're having trouble pairing your phone, Toyota has you covered. You can get more information from the following sources:

Online Pairing Guide:
www.toyota.com/connect

Your Toyota Owner's Manual
Located in the vehicle glovebox

Toyota Customer
Experience Center
(800) 331-4331

Disclosures

This brochure is accurate at the time of print; content subject to change based on periodic multimedia software updates.

1. Concentrating on the road should always be your first priority while driving. Do not use the hands-free phone system if it will distract you.
2. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Toyota is under license. A compatible Bluetooth enabled phone must first be paired. Phone performance depends on software, coverage & carrier.
3. Android is a trademark of Google Inc.
4. Apps/services vary by phone/carrier; functionality depends on many factors. Select apps use large amounts of data; you are responsible for charges. Apps & services subject to change. See Toyota.com/entune for details.

Bluetooth® Pairing for iPhone and Entune™ touch screen system

****Do not attempt the Bluetooth® Pairing process while driving.****


Pairing your phone is the first step in connecting with your Toyota for hands-free calling and for audio streaming via Bluetooth. This pairing process is quick and easy: all iPhone mobile digital devices have Bluetooth integrated; all you have to do is setup the phone and multimedia system to “talk” to each other and form a connection.

Initiate Bluetooth® on your iPhone®



STEP 1

From the **HOME SCREEN**, select **SETTINGS**.




STEP 2

Select **BLUETOOTH**.



STEP 3

Ensure **BLUETOOTH** is **ON**.



STEP 4

Your iPhone will seek out Bluetooth devices while remaining discoverable.



STEP 5

While your iPhone device is seeking out Bluetooth devices, proceed to your Entune Multimedia Head Unit on your Toyota vehicle.

Initiate Bluetooth® on your Entune™ Multimedia Head Unit

Once you have Bluetooth enabled on your phone and ready to pair, you will need to initiate Bluetooth on your Entune head unit. Please follow the instructions below to pair your Bluetooth enabled phone to your Entune system.



STEP 6

On your Toyota Vehicle Entune Multimedia Head Unit, Select **SETUP BUTTON** on the Home Screen.

For Entune™ Audio System, press the **SETUP BUTTON** on the faceplate to access the Setup Screen.



STEP 7

Select **BLUETOOTH**.

Image shown is a sample image, features may vary.



STEP 8

Select **ADD**, to add your phone device.



STEP 9


Back on your smartphone, you can now select your **TOYOTA VEHICLE** in Bluetooth Settings.

You may need to enter the provided Bluetooth PIN on your phone.



STEP 10


Your smartphone is now paired with Entune.



STEP 11

Once paired, Entune will attempt to connect audio and contacts on your phone.

BLUETOOTH® DEVICE PAIRING

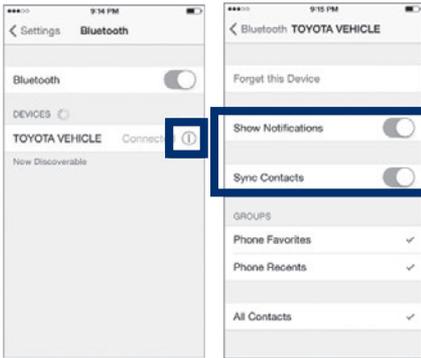

STEP 12

Using your smartphone, you may need to allow Entune access to your messaging and contacts.

Only current iPhone text messages can be viewed on the head unit. iPhone does not allow text message reply.



STEP 13

A confirmation will appear once your phone has been paired and connected.

Additional Resources

If you're having trouble pairing your phone, Toyota has you covered. You can get more information from the following sources:

Online Pairing Guide:
www.toyota.com/connect

Your Toyota Owner's Manual
Located in the vehicle glovebox

Toyota Customer
Experience Center
(800) 331-4331

Disclosures

This brochure is accurate at the time of print; content subject to change based on periodic multimedia software updates.


1. Concentrating on the road should always be your first priority while driving. Do not use the hands-free phone system if it will distract you.
2. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Toyota is under license. A compatible Bluetooth enabled phone must first be paired. Phone performance depends on software, coverage & carrier.
3. Android is a trademark of Google Inc.
4. Apps/services vary by phone/carrier; functionality depends on many factors. Select apps use large amounts of data; you are responsible for charges. Apps & services subject to change. See Toyota.com/entune for details.

Bluetooth® Pairing for Windows Phone and Entune™ touch screen system

****Do not attempt the Bluetooth® Pairing process while driving.****

Pairing your phone is the first step in connecting with your Toyota for hands-free calling and for audio streaming via Bluetooth. This pairing process is quick and easy: all Windows Phone mobile digital devices have Bluetooth integrated; all you have to do is setup the phone and multimedia system to “talk” to each other and form a connection.

Initiate Bluetooth® on your Windows Phone®



STEP 1

From your APP LIST, select **SETTINGS**.



STEP 2

Select **BLUETOOTH**.




STEP 3

Ensure **BLUETOOTH** is **ON**.



STEP 4

Phone will seek out Bluetooth devices while remaining discoverable.

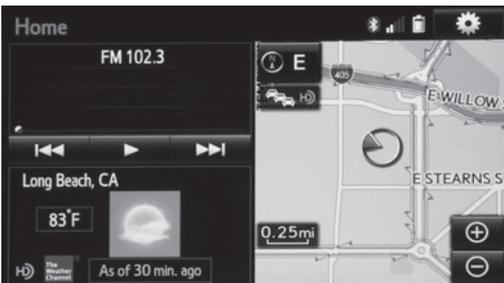

STEP 5

While your iPhone device is seeking out Bluetooth devices, proceed to your Entune Multimedia Head Unit on your Toyota vehicle.

BLUETOOTH® DEVICE PAIRING

Initiate Bluetooth® on your Entune™ Multimedia Head Unit

Once you have Bluetooth® enabled on your phone and ready to pair, you will need to initiate Bluetooth® on your Entune head unit. Please follow the instructions below to pair your Bluetooth enabled phone to your Entune system.



STEP 6

On your Toyota Vehicle Entune Multimedia Head Unit, Select **SETUP BUTTON** on the Home Screen.

For Entune™ Audio System, press the **SETUP BUTTON** on the faceplate to access the Setup Screen.



STEP 7

Select **BLUETOOTH**.

Image shown is a sample image, features may vary.



STEP 8

Select **ADD**, to add your phone device.



STEP 9


Back on your smartphone, you can now select your **TOYOTA VEHICLE** in Bluetooth Settings.

You may need to enter the provided Bluetooth PIN on your phone.



STEP 10


Your smartphone is now paired with Entune.



STEP 11

Once paired, Entune will attempt to connect audio and contacts on your phone.

Initiate Bluetooth® on your Entune™ Multimedia Head Unit

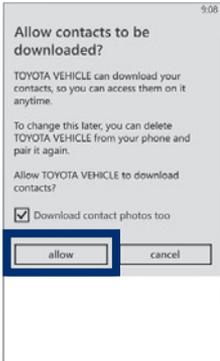

STEP 12

Using your smartphone, you may need to allow Entune access to your contacts.



STEP 13

A confirmation will appear that your phone has been paired and connected.

Additional Resources

If you're having trouble pairing your phone, Toyota has you covered. You can get more information from the following sources:

Online Pairing Guide:
www.toyota.com/connect

Your Toyota Owner's Manual
Located in the vehicle glovebox

Toyota Customer
Experience Center
(800) 331-4331

Disclosures

This brochure is accurate at the time of print; content subject to change based on periodic multimedia software updates.

1. Concentrating on the road should always be your first priority while driving. Do not use the hands-free phone system if it will distract you.
2. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Toyota is under license. A compatible Bluetooth enabled phone must first be paired. Phone performance depends on software, coverage & carrier.
3. Android is a trademark of Google Inc.
4. Apps/services vary by phone/carrier; functionality depends on many factors. Select apps use large amounts of data; you are responsible for charges. Apps & services subject to change. See Toyota.com/entune for details.

NOTES



www.toyota.com/owners

CUSTOMER EXPERIENCE CENTER
1-800-331-4331



Printed in U.S.A. 08/18
18-MKG-12089



00505QRG19TAC