

QUICK REFERENCE GUIDE



SEQUOIA

2024

2024

SEQUOIA

This Quick Reference Guide is a summary of basic vehicle operations. It contains brief descriptions of fundamental operations so you can locate and use the vehicle's main equipment quickly and easily.

The Quick Reference Guide is not intended as a substitute for the Owner's Manual located in your vehicle's glove box. We strongly encourage you to review the Owner's Manual and supplementary manuals so you will have a better understanding of your vehicle's capabilities and limitations.

Your dealership and the entire staff of Toyota Motor North America, Inc. wish you many years of satisfied driving in your new Sequoia.

A word about safe vehicle operations

This Quick Reference Guide is not a full description of Sequoia operations. Every Sequoia owner should review the Owner's Manual that accompanies this vehicle.

Pay special attention to the boxed information highlighted in color throughout the Owner's Manual. Each box contains operating instructions to help you avoid injury or equipment malfunction.

All information in this Quick Reference Guide is current at the time of printing. Toyota reserves the right to make changes at any time without notice.

OVERVIEW

Engine maintenance	11
Fuel tank door release & cap	10
Hood release	10
Indicator symbols	6-7
Instrument cluster	5
Instrument panel	2-4
Instrument panel light control	11
Keyless entry ^{1,2}	8-9
Smart Key system ^{1,2}	9

FEATURES & OPERATIONS

Air conditioning/heating ^{1,2}	30
Audio Multimedia	33
Auto lock/unlock ^{1,2}	13
AUTO LSD system	40
Blind Spot Monitor (BSM) ² and Rear Cross Traffic Alert (RCTA) ²	49
Bottle holders	23
Clock	14
Crawl control	44-45
Cup holders	23
Door lock switches	14
Downhill assist control system	41
Driving mode select switches ²	42-43
Electric parking brake	28
Electronically modulated air suspension	37
Four-wheel drive selector	48
Front and Rear Parking Assist with Automatic Braking (PA w/AB)	51
Front seats-Adjustments	16
Garage door opener (HomeLink®) ³	36
Head-up display (HUD) ²	29
Heated/ventilated seats	31
Heated steering wheel	31
Height Adjustable, Hands-Free Power Liftgate	26-27
Hybrid transmission	13
i-FORCE MAX Hybrid System	12
Intuitive parking assist ²	52
Light bar	21
Lights ^{1,2} & turn signals	20-21
Moonroof ¹	24
Multi-Information Display (MID) ²	29
Multi-Terrain Select	46-47
Panoramic moonroof ¹	25
Panoramic View Monitor (PVM)	50
Power outlet-12V DC	35

FEATURES & OPERATIONS (continued)

Power outlets-120V AC	35
Power steps switch	24
Power windows ¹	14
Qi Wireless charger	34
Rear differential lock system	43
Rear seats-Adjustments	17
Seats-Folding 2nd row seats	18
Seats-Folding 3rd row seats	19
Seats-Head restraints	16
Steering wheel switches & telephone controls (Bluetooth®)	32
Tilt & telescopic steering wheel	15
TOW HAUL switch	45
Trailer Backup Guide	38
Trailer brake controller	39
USB charge ports	34
USB media port	33
Vehicle Stability Control (VSC)/TRAC/ Trailer sway control OFF switch	40
Windshield wipers & washers ¹	22

TOYOTA SAFETY SENSE™ 2.5

Automatic High Beams (AHB)	66-67
Full-Speed Range Dynamic Radar Cruise Control (DRCC)	63-65
Lane Tracing Assist (LTA) System	57-62
Pre-Collision System with Pedestrian Detection (PCS w/PPD)	54-56
Quick overview- Toyota Safety Sense™ 2.5	53
Road Sign Assist (RSA)	67-68
Sensors	54

SAFETY & EMERGENCY FEATURES

Floor mat installation	74
Rear door child safety locks	71
Safety Connect®	71
Seat belts	70
Seat belts-Shoulder belt anchor	70
Spare tire & tools	72
Star Safety System™	73-74
Tire Pressure Monitoring (warning) System (TPMS)	69
Trailer Sway Control	74

GETTING STARTED WITH TOYOTA AUDIO MULTIMEDIA AND CONNECTED SERVICES

76-87

¹ Visit your Toyota dealer for information on customizing this feature.

² Programmable by customer. Refer to the "Owner's Manual" for instructions and more information.

³ HomeLink® is a registered trademark of Genex Corporation.

Instrument panel

Multi-Information Display (MID) control switches

Telephone switch²

Full-Speed Range Dynamic Radar Cruise Control (DRCC) vehicle-to-vehicle distance switch

Lane Tracing Assist (LTA) switch

Full-Speed Range Dynamic Radar Cruise Control (DRCC) switches

Audio volume control switch²



Voice command talk switch²

Audio control switches²

Steering wheel controls

Headlight/turn signal/ front fog light control


Meters/Multi-Information Display (MID)

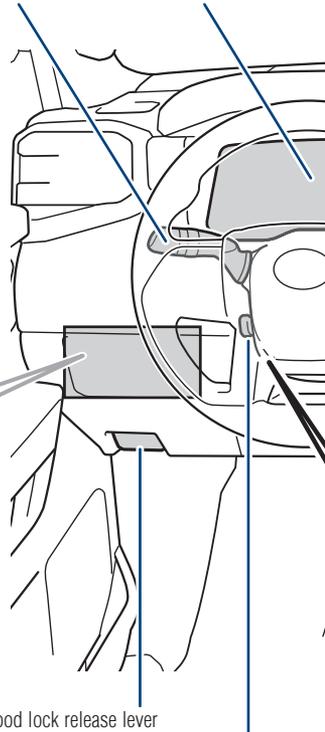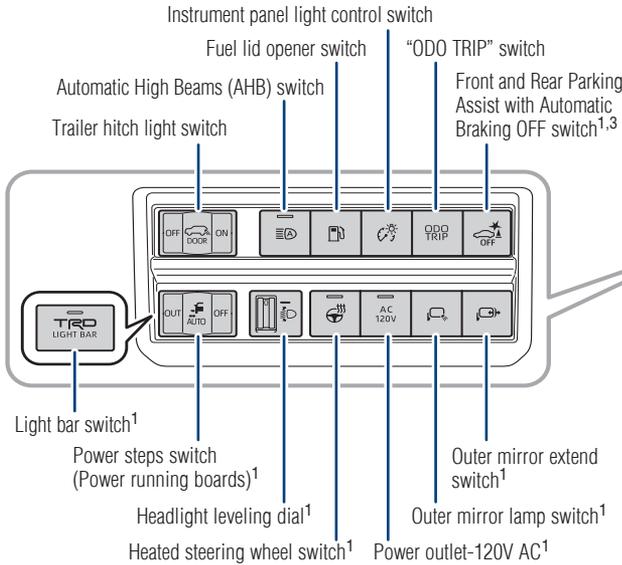

¹ If equipped.


² For details, refer to the “Multimedia Owner’s Manual” or visit www.toyota.com/audio-multimedia for additional resources.

³ Refer to section PKSB (Parking Support Braking function) in the “Owner’s Manual”.

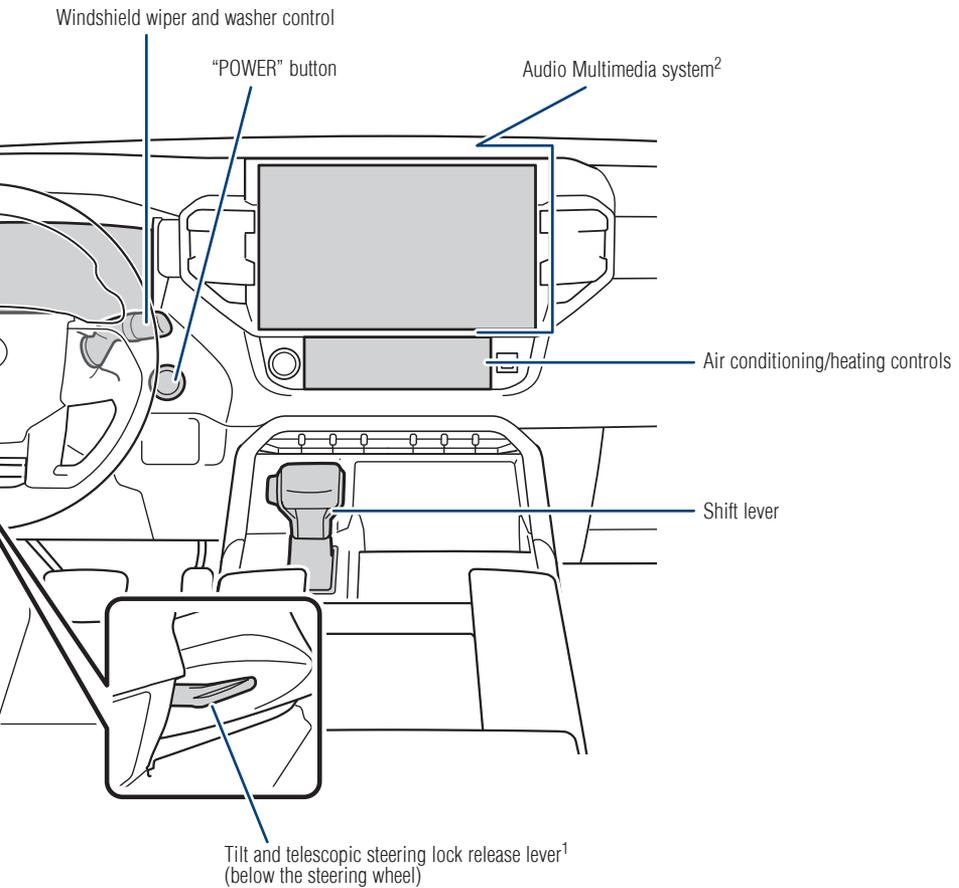

Instrument panel (continued)


CENTER CONSOLE AREA

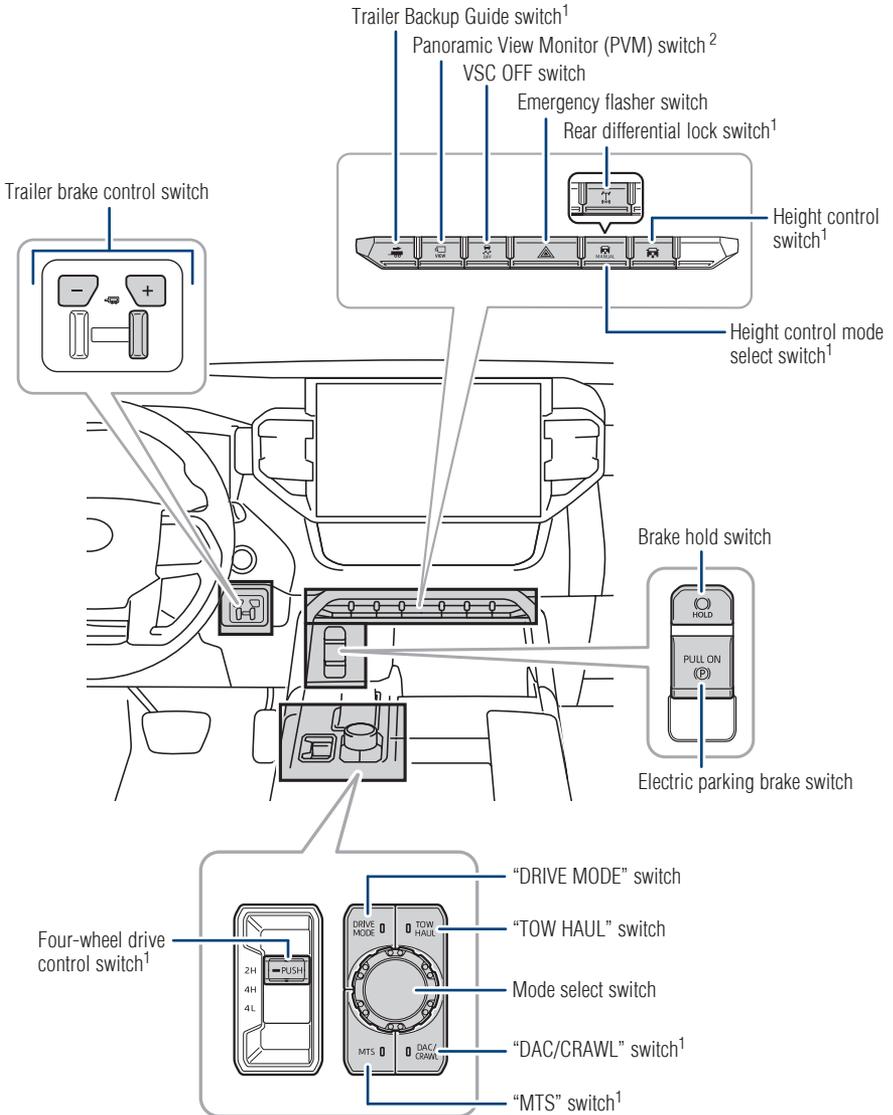

¹ If equipped

² For details, refer to the "Multimedia Owner's Manual" or visit www.toyota.com/audio-multimedia for additional resources.

Instrument cluster

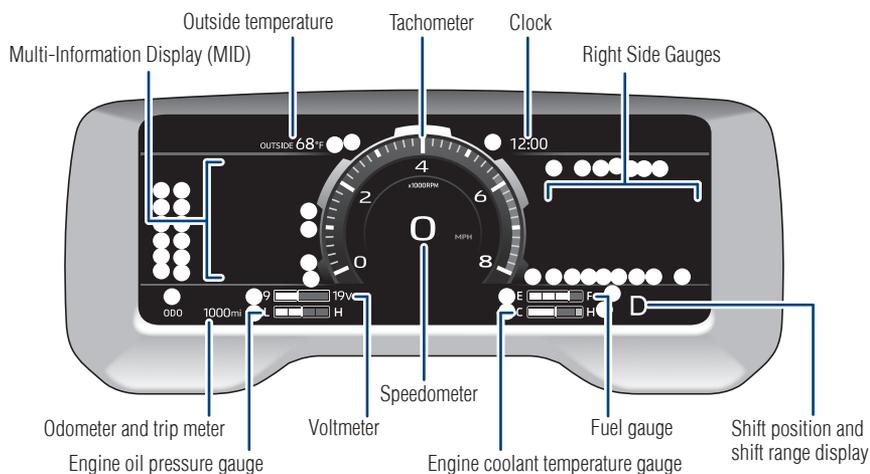

○ Service indicators and warning lights

OVERVIEW

Indicator symbols

For details, refer to “Warning lights and indicators,” Section 2, 2024 “Owner’s Manual”.

	AIR BAG ON/OFF indicator ¹		DEEP SNOW mode indicator ⁴
	ABS (Anti-lock Brake System) warning ¹		DIRT mode indicator ⁴
	AHB (Automatic High Beams) indicator		Downhill assist control system indicator ⁴
	Air suspension indicator ⁴		Driver's and front passenger's seat belt reminder ⁵ (alarm will sound when the vehicle is on)
	Air suspension malfunction indicator ⁴		ECO mode indicator
	AUTO LSD (Limited Slip Differential) indicator ^{1,4}		Electric power steering warning ^{1,5} [red/yellow]
	AUTO mode indicator ⁴		4H 4L 4H/4L indicator ⁴
	Brake hold operating indicator ^{1,2,5}		Front and Rear Parking Assist with Automatic Braking OFF indicator ^{1,2,4,5,6}
	Brake hold standby indicator ¹		Front fog light indicator
	Brake system warning ^{1,5}		Fuel tank door position
	Brake system warning ^{1,5} [yellow]		Headlight low/high beam indicator
	BSM (Blind Spot Monitor) OFF indicator ¹		High coolant temperature warning
	BSM outside rear view mirror indicators ¹		Inappropriate pedal operation warning ⁵
	Charging system warning ⁵		Intuitive parking assist OFF indicator ^{2,5}
	COMFORT mode indicator ⁴		Low engine oil pressure warning ⁵
	Constant speed cruise control/Full-Speed Range Dynamic Radar Cruise Control (DRCC) indicator		Low fuel level warning
	Constant speed cruise control/Full-Speed Range DRCC SET indicator		Low outside temperature indicator
	Crawl Control indicator ^{1,4}		Low tire pressure warning ¹
	Crawl Control speed level indicator ⁴		LTA (Lane Tracing Assist) indicator ⁵ [white/green/yellow ³]
	CUSTOM mode indicator ⁴		



Malfunction/Check Engine indicator¹



TOW HAUL indicator



MUD mode indicator⁴



TOW+ indicator



Parking brake indicator^{2,5}



Trailer brake warning



PCS (Pre-Collision System) warning^{1,2,5}



Turn signal indicator



RCTA (Rear Cross Traffic Alert) OFF indicator^{1,2,5}



VSC (Vehicle Stability Control) OFF indicator¹



READY indicator



Rear differential lock indicator^{2,4}



Rear passengers' seat belt reminder⁵



SAND mode indicator⁴



Security indicator



Slip indicator^{1,3}



Smart key system indicator



SPORT mode indicator⁴



SPORT S mode indicator⁴



SPORT S+ mode indicator⁴



SRS airbag warning¹

¹ If the indicator does not turn off within a few seconds of starting the vehicle, there may be a malfunction. Have the vehicle inspected by your Toyota dealer.

² If the indicator flashes, there may be a malfunction. Refer to the "Owner's Manual".

³ If the indicator flashes, it indicates that the system is operating.

⁴ If equipped.

⁵ With warning buzzer.

⁶ Refer to section PKSB (Parking Support Braking function) in the "Owner's Manual".

OVERVIEW

Keyless entry

UNLOCKING OPERATION




Press

ONCE: Driver door
TWICE: All doors

Carry Smart
Key remote

Driver door unlock*

Grasp



NOTE: If a door is not opened within 60 seconds of unlocking, all doors will relock for safety.

LOCKING OPERATION



Press

Carry Smart
Key remote


All-door lock

Touch




LIFTGATE LOCKING/UNLOCKING/OPENING** OPERATION

** If equipped.



Press and hold
to open/close

Carry Smart
Key remote



* Driver door unlocking function can be programmed to unlock driver door only, or all doors. Grasping passenger door handle will unlock all doors.

Please refer to the "Owner's Manual" for more details on how to program the doors.

NOTE: Doors may also be locked/unlocked using the mechanical key. (Slide the release lever on the back of Smart Key and take the mechanical key out.)

PANIC BUTTON




 **HOLD**
Press and hold



Smart Key system


START FUNCTION

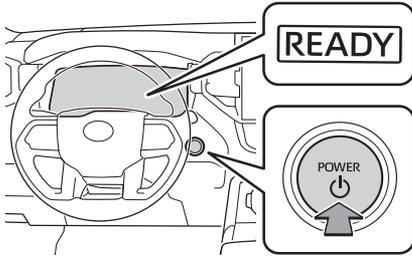

NOTE: The Smart Key must be carried to enable the start function. With the shift lever in Park and the brake pedal depressed, press the power button.


POWER (WITHOUT STARTING THE VEHICLE)

Without depressing the brake pedal, pressing the power button will change the operation mode in succession from:

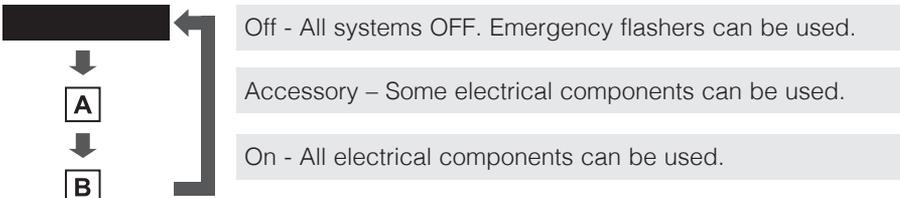


A - "ACCESSORY," **B** - "POWER ON"

Fuel tank door release & cap

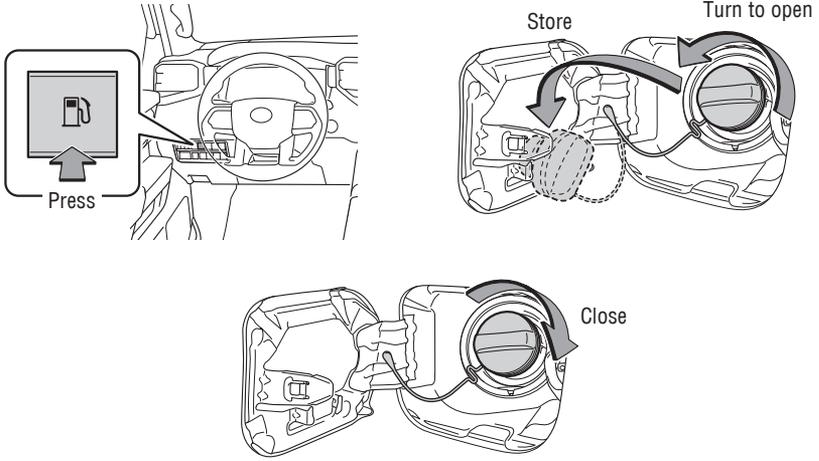


NOTE: To close, tighten until one click is heard. If the cap is not locked or tightened enough, the Check Engine indicator "CHECK" may illuminate.

Hood release

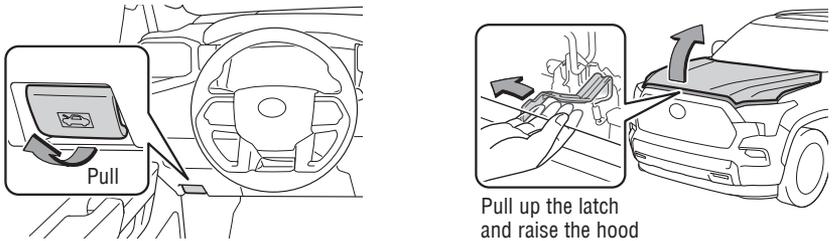


Instrument panel light control

Press to adjust the brightness level.
Short press: 1 step change
Long press: continues change

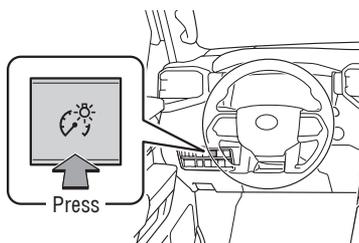

Engine maintenance

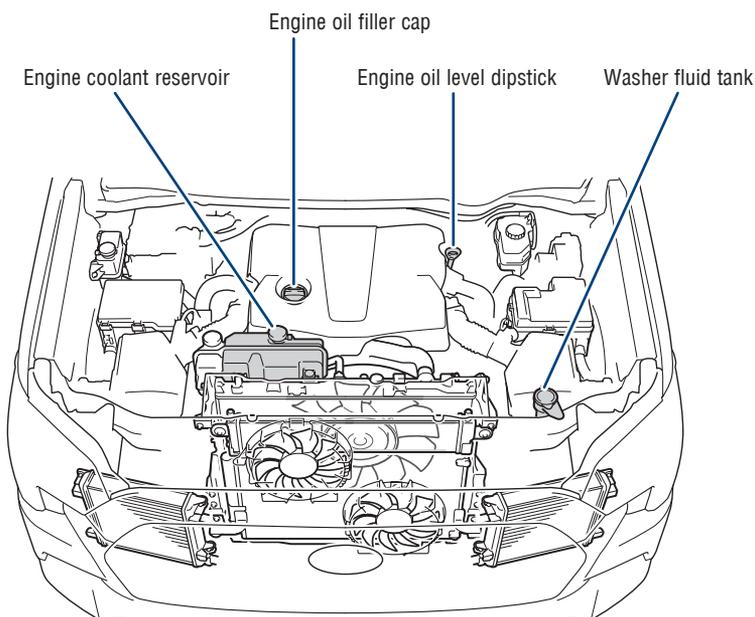

NOTE: Regularly scheduled maintenance at your Toyota dealer, including oil changes, will help extend the life of your vehicle and maintain performance. Please refer to the “*Warranty & Maintenance Guide.*”

FEATURES & OPERATIONS

i-FORCE MAX Hybrid System


The i-FORCE MAX system utilizes a computer controlled gasoline engine and an electric motor located in-between the engine and transmission to provide the most efficient combination of power for the vehicle. When the brakes are applied, the motor will act as a generator to provide charging energy for the traction battery, as well as provide braking force in conjunction with the service brakes to slow the vehicle. In addition, the engine may shut off when the vehicle comes to a stop to reduce fuel consumption and emissions. The engine will automatically restart as needed.

NOTE: Fuel consumption of the Hybrid System is shown on the multimedia system.

TIPS FOR IMPROVED FUEL ECONOMY


- Ensure tire pressures are maintained at levels specified in the “*Owner’s Manual*”.
- When possible, link trips to reduce engine cold starts.
- Avoid driving at speeds that are higher than necessary, especially on the highway.
- When possible, avoid sudden stops to maximize regenerative braking energy.
- Minimize use of the air conditioning.

STARTING THE HYBRID SYSTEM

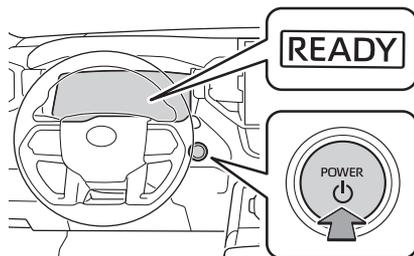

- (1) Put the shift lever in “P.”
- (2) Depress the brake pedal, and “” and a message will be displayed on the Multi-Information Display (MID).
- (3) Press the “POWER” button briefly and firmly.
- (4) Continue depressing the brake pedal until the “READY” indicator is illuminated. If the “READY” indicator turns on, the hybrid system will operate normally. Shift the lever to the desired position and you may begin driving.

Hybrid transmission

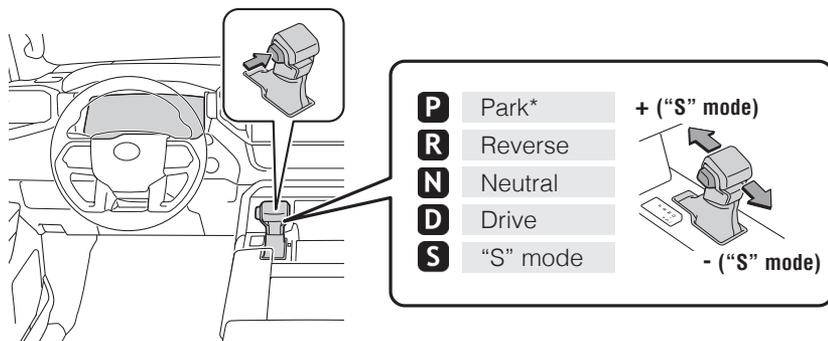

* The vehicle must be on and the brake pedal depressed to shift from Park.

"S" (SEQUENTIAL) MODE

Shift the shift lever to "S" position from "D" position.

- + : Upshift (push and release)
- : Downshift (pull and release)

Downshifting increases power going uphill, or provides engine braking downhill. For best fuel economy during normal driving conditions, always drive with the shift lever in the "D" position.

Refer to the "Owner's Manual" for more details.

Auto lock/unlock

Automatic door locks can be programmed to operate in different modes, or turned OFF.

DEFAULT SETTING

Shift position linked door locking/unlocking function

- Doors lock when shifting from Park.
- Doors unlock when shifting into Park.

CUSTOMIZED SETTING

Speed linked door locking function


- Doors lock when the vehicle speed is approximately 12 mph (20 km/h) or higher.

Driver's door linked door unlocking function



- Doors unlock when driver's door is opened within approximately 45 seconds after the vehicle is turned off.

Refer to the "Owner's Manual" for more details.

Door lock switches

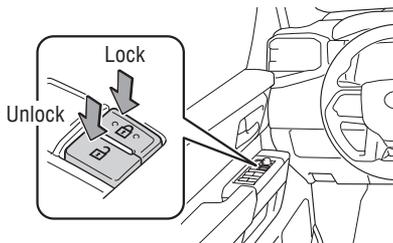

Power windows

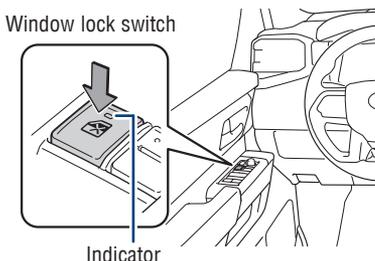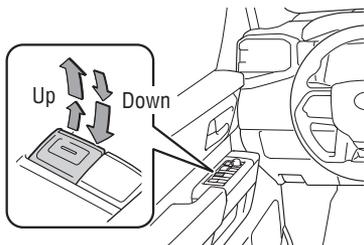


Automatic operation

Press the switch completely down or pull it completely up and release to fully open or close. To stop the window partway, lightly press the switch in the opposite direction.

Window lock switch

Deactivates all passenger windows and back window. Driver's window remains operable.

Clock

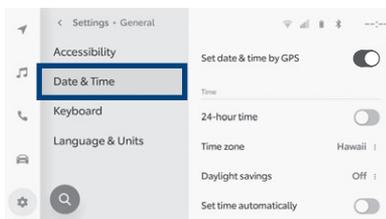


- 1) Touch “” on the main menu.
- 2) Select “**General**” on the submenu.
- 3) Select “**Date & Time**.”
- 4) Select the desired items to be set.

NOTE: It is recommended to “Set date & time by GPS” feature to ON for automatic time updates based on your location.

Refer to the “Multimedia Owner’s Manual” for more details.


Tilt & telescopic steering wheel

MANUAL

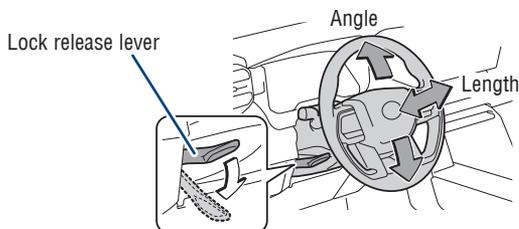

Hold the steering wheel, push the lever down, set angle and length and return the lever.

POWER (IF EQUIPPED)

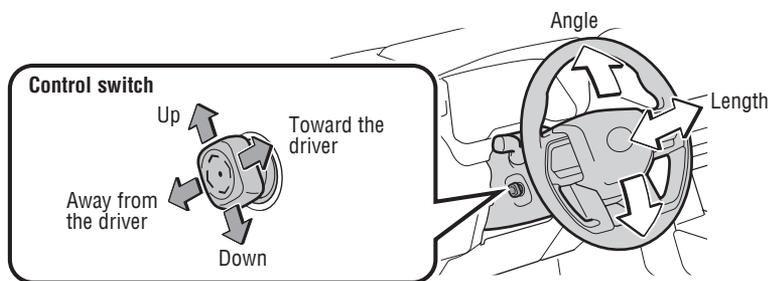

Toggle the control switch to set angle and length.

NOTE: Do not attempt to adjust while the vehicle is in motion.

Automatic tilt-away & returning function (if equipped)

When the vehicle is turned off, the steering wheel is automatically adjusted to a position that allows driver to enter and exit the vehicle easily.

When the power button has been turned "ACCESSORY" or "POWER ON", the steering wheel automatically returns to the original position.


Power easy access system (if equipped)

The steering wheel and driver's seat move in accordance with the power button mode and the driver's seat belt condition.

FEATURES & OPERATIONS

Seats-Head restraints


FRONT AND SECOND ROW



Lock release button


THIRD ROW

Center seat




Lock release button

Outer seats



Lock release button

Front seats-Adjustments

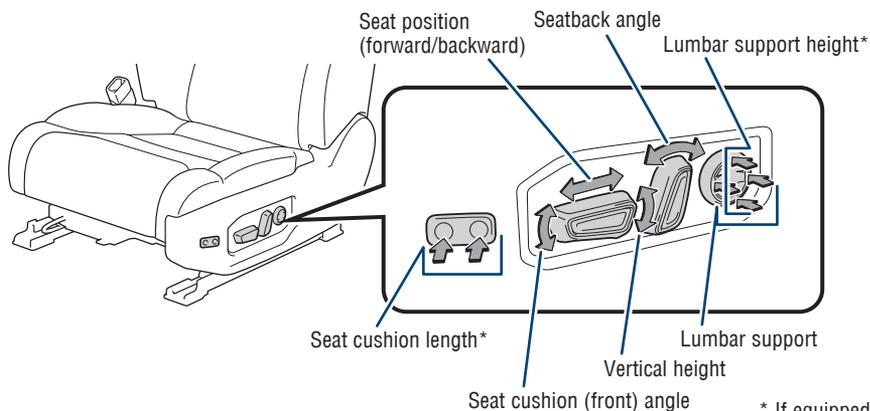


Power easy access system (if equipped)

The driver's seat and steering wheel move in accordance with the power button mode and the driver's seat belt condition.

Rear seats-Adjustments


SECOND ROW

Separate seat



Seatback angle

Bench seat




Seatback angle

THIRD ROW

Manual seat


Seatback angle

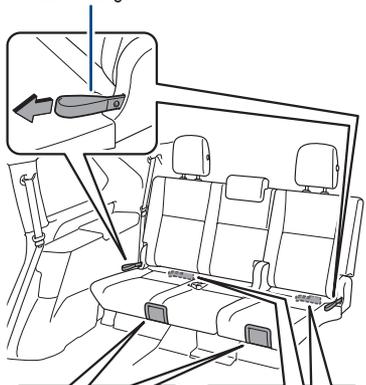


Seat position

Power seat

Seatback folding/returning

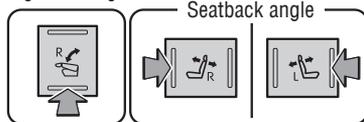

Seatback angle

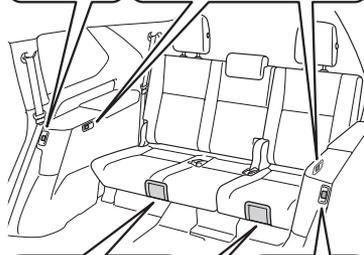

Seat position




Seatback folding/returning

Refer to the "Owner's Manual" for more details.

Seats-Folding 2nd row seats

(1)

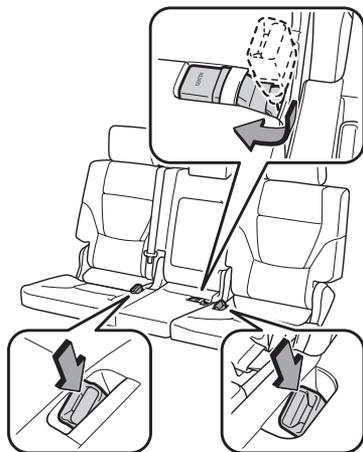


After release the second seat belt, stow the seat belt buckles in the pockets.
And then lower the second seat head restraints.

(2)


Getting in the vehicle

Pull the lever to fold down.

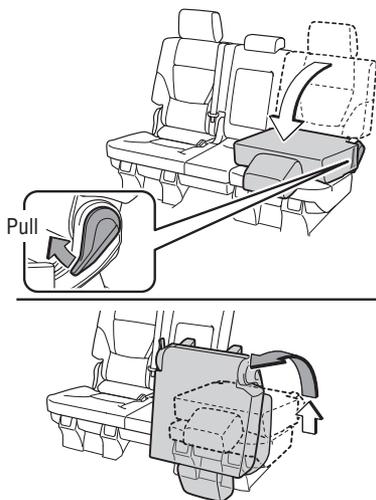


Getting out of the vehicle

Pull the strap to fold down.

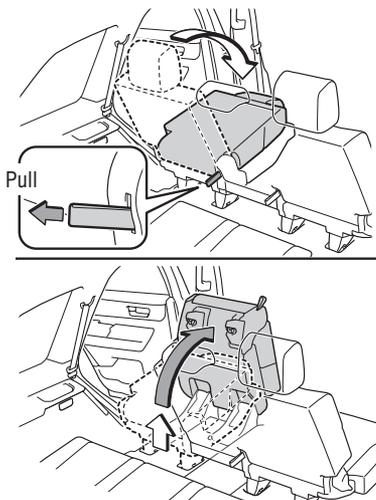


Seats-Folding 3rd row seats

(1)




Remove the belt inserting the plate or mechanical key.

(2)

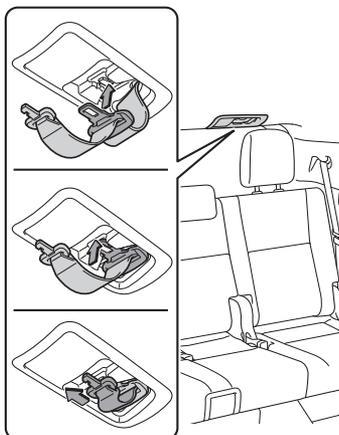

Stow the center seat belt tabs.

(3)




Stow the seat belt buckles.


(4)

From rear door side

Manual seat




Power seat




Press and hold the switch until the seat folds down fully and the buzzer sounds.

From back door side

Manual seat



Power seat





Press and hold the switch until the seat folds down fully and the buzzer sounds.

Lights & turn signals

HEADLIGHTS

Operating the  switch turns on the headlight indicator .

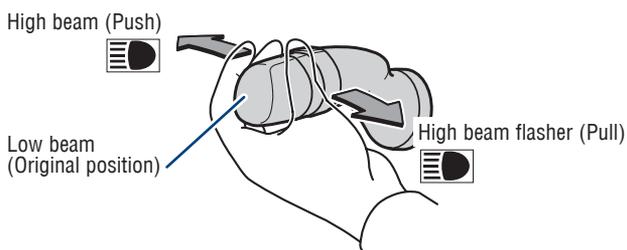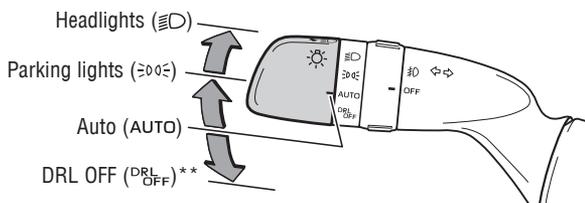

Daytime Running Light system (DRL)

Automatically turns on under certain conditions to make vehicle more visible to other drivers. Not for use at night. (The parking brake needs to be released and the headlight switch must be in the “D” or “AUTO” position while the vehicle is on.)

Automatic light cut off system (AUTO)

- Headlights are on: The headlights and taillights will turn off automatically 30 seconds after the vehicle is turned from ON to ACC or OFF and the driver’s door is opened and closed. (If the “” switch on the Smart Key remote is pressed after all doors are closed, the lights will turn off immediately.)
- Only the taillights are on: The taillights will turn off automatically if the vehicle is turned from ON to ACC or OFF and the driver’s door is opened.

Automatic High Beams system (AHB)*


Automatically switches between high and low beams as appropriate to enhance vision at night.

Refer to *Toyota Safety Sense™ 2.5* in this guide or the “Owner’s Manual” for more details on the Automatic High Beams feature.


* Operating conditions must be met. Refer to the “Owner’s Manual” for details.

** If equipped.

HEADLIGHT LEVELING DIAL (IF EQUIPPED)

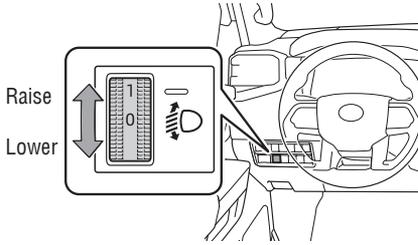


FRONT FOG LIGHTS

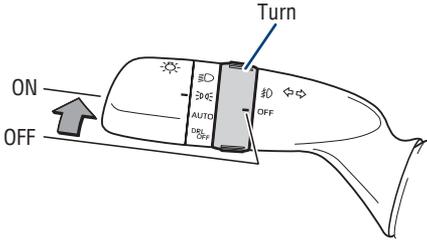

Front fog lights come on when the parking lights are on or the headlights are on in low beam.




TURN SIGNALS

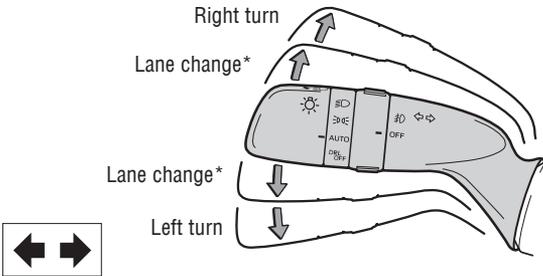

* Move the lever partway and release. The signals will flash three times.

Light bar (if equipped)


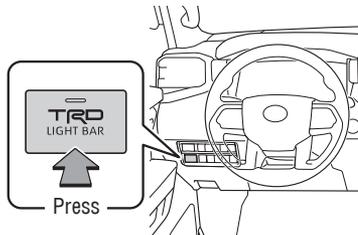


The vehicle and high beam headlights must be on for use.

FEATURES & OPERATIONS



Windshield wipers & washers

INTERMITTENT (IF EQUIPPED)

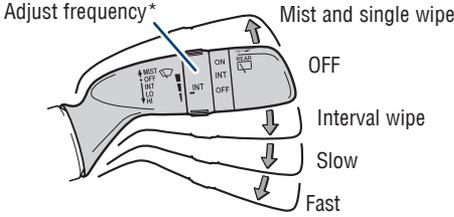


* **Intermittent windshield wiper frequency adjustment:** Rotate to increase/decrease wiper frequency.

RAIN-SENSING (IF EQUIPPED)

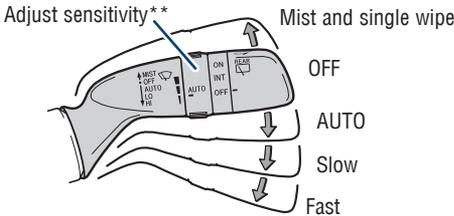

** **Rain-sensing windshield wiper sensitivity adjustment:** Rotate to increase/decrease sensor sensitivity.


REAR

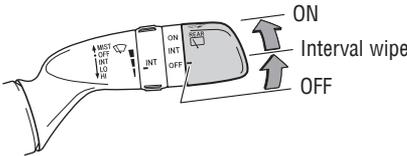


* The wiper will automatically operate a couple of times after the washer squirts.

Bottle holders

FRONT (DOOR MOUNTED)




REAR (DOOR MOUNTED)




Cup holders

FRONT




REAR


Type A




Type B



Type C



Type D



FEATURES & OPERATIONS


Power steps switch (if equipped)

POWER RUNNING BOARDS (IF EQUIPPED)


The power running boards deploy when opening a door or by using the switch inside the vehicle.

The power running boards stow by closing a door, operating the switch inside the vehicle, or by driving 3 mph (5 km/h) or higher.

Side door linked operation

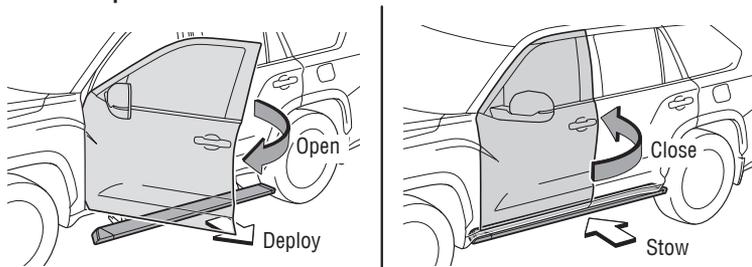

OPERATING FROM INSIDE

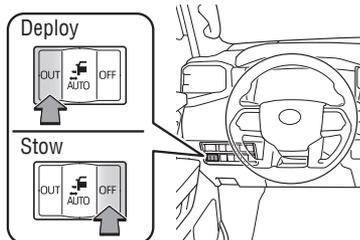


Refer to the "Owner's Manual" for limitations and more details.

Moonroof (if equipped)

SLIDING OPERATION


Press once to open partway.
Press again to open completely.

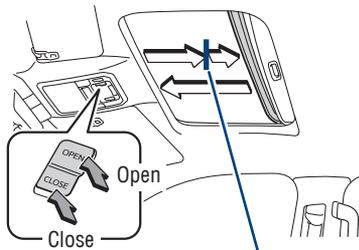

Recommended open position to minimize wind noise.

TILTING OPERATION

Press once to open completely.

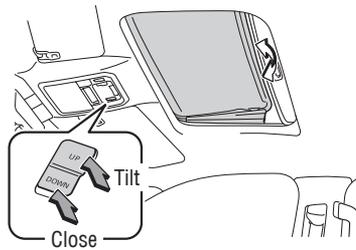


Lightly press either side of the moonroof switch while opening/tilting is in progress, the moonroof stops partway.

Panoramic moonroof (if equipped)

SLIDING OPERATION

Opening and closing the electronic sunshade




Open - Slide and hold the “☀️” switch backward. The electronic sunshade will open fully automatically.*


Close - Slide and hold the “☀️” switch forward. The electronic sunshade will close fully automatically.*

* Quickly slide and release the “☀️” switch in either direction to stop the electronic sunshade partway.

Opening and closing the panoramic moonroof



Open - Slide and hold the “ROOF” switch backward. The panoramic moonroof and electronic sunshade will open automatically.*




Close - Slide and hold the “ROOF” switch forward. The panoramic moonroof will fully close automatically.

* Quickly slide and release the “ROOF” switch in either direction to stop the panoramic moonroof partway.

TILTING OPERATION

Tilting the panoramic moonroof up and down



Tilt-up - Press the center of the “ROOF” switch to tilt the panoramic moonroof up. When the panoramic moonroof is tilted up, the electronic sunshade opens to the half-open position.


Tilt-down - Press and hold the center of the “ROOF” switch to tilt down. The panoramic moonroof can be tilted down only when it is in the tilt-up position.

Note: The panoramic moonroof can be opened from the tilt-up position. Also, lightly pressing the “ROOF” switch again stops the panoramic moonroof partway.

FEATURES & OPERATIONS


Height Adjustable, Hands-Free Power Liftgate (if equipped)

From front seats

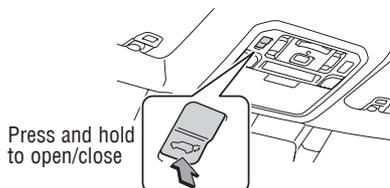


Power Liftgate (back door)

(open only)



(close)





HEIGHT ADJUSTABLE FUNCTION

1. When the liftgate reaches the desired height, press the rear liftgate close-button (on the door jam of the liftgate) once. Press and hold the button until the buzzer sounds (4 times).
2. To reset the height, with the liftgate open and not moving, press and hold the rear liftgate close-button until the buzzer sounds 4 times, and continue to hold until it buzzes again, then let go. Press the same button to close the liftgate. When you open the liftgate next time, it will open to the maximum height.
3. To set the height using the Multi-Information Display, press “<>” or “◇” of the MID control switches and select “Vehicle Settings” from “⚙️” screen. Press “<>” or “◇” and select “ PBD” and then press “.
 Select “PBD Opening Adjustment,” then press “. Select desired position (5 height options to choose from,) then press “.

NOTE: If battery is disconnected, the power back door needs to be reinitialized.

HANDS-FREE FUNCTION (IF EQUIPPED)

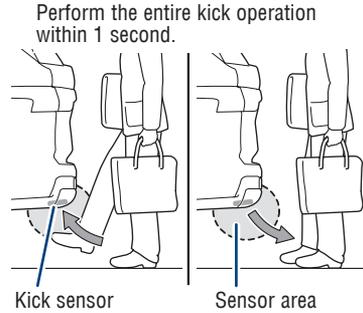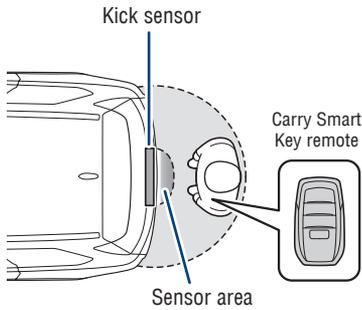

To automatically open/close Power Liftgate

Quickly kick your foot in and out underneath the lower center part of the rear bumper within 1 second to trigger the sensor. The system will give a single beep when the sensor recognizes the successful kick-in of the foot. To operate, make sure that the touchless sensor operation is enabled, the vehicle is OFF and that you are carrying a Smart Key remote.

Press “<>” or “◇” of the MID control switches and select “ PBD” from the “Vehicle Settings” from “ ” screen on the Multi-Information Display (MID) to access hands-free settings. And press “ ” to enter selection.

NOTE:


- Installation of a tow hitch receiver or other accessories may require disabling or removing the kick sensor.
- Use the same “ ” and “ ” icons from the HUD section.

Refer to the “Owner’s Manual” for limitations and more details on this system.

Electric parking brake


PARKING BRAKE

Automatic mode



- A** "EPB Shift Interlock Function Activated"
- B** "EPB Shift Interlock Function Deactivated"

Manual mode



Automatic mode (shift lever operation)

To turn automatic mode ON, while vehicle is stopped, pull and hold the parking brake switch until a buzzer sounds and "EPB Shift Interlock Function Activated" displays on the Multi-Information Display (MID). While depressing the brake pedal, shifting the lever into P position will automatically set the brake and turn the parking brake indicator light on. To release the brake, depress the brake pedal and shift the lever out of P. The indicator will turn off.


To turn automatic mode OFF, press and hold the parking brake switch until a buzzer sounds and "EPB Shift Interlock Function Deactivated" displays on the MID.

Manual mode

While the vehicle is stopped and the brake pedal is depressed, pull the switch to set the parking brake and turn the parking brake indicator light on. To release, depress the brake pedal and press the switch. The indicator will turn off.

Refer to the "Owner's Manual" for limitations and more details.

BRAKE HOLD

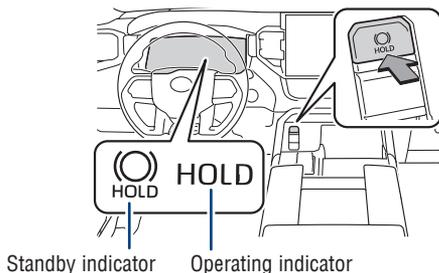


The brake hold system keeps the brake applied when the shift lever is in D, S or N while the system is on and the brake pedal has been depressed to stop the vehicle. The system releases the brake when the accelerator pedal is depressed with the shift lever in D or S to allow smooth start off.

Refer to the "Owner's Manual" for limitations and more details.

Multi-Information Display (MID)


Content display area

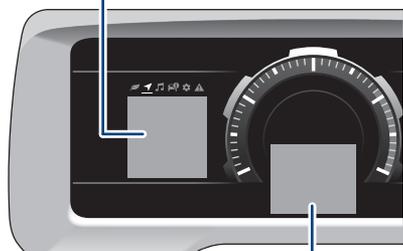

Driving support system status display area

Return to the previous screen

Enter/Set:
Press to enter/set, press and hold to reset



“<>” or “◊”

Press to select an item/change pages

Press MID control switches to change and select information in the following:



- | | |
|----------------------------------|-----------------------------|
| Driving information display | Vehicle information display |
| Navigation system-linked display | Settings display |
| Audio system-linked display | Warning message display |

Refer to the “Owner’s Manual” for more details.

Head-Up Display (HUD) (if equipped)

Shift position display/RSA (Road Sign Assist) display area

Vehicle speed display

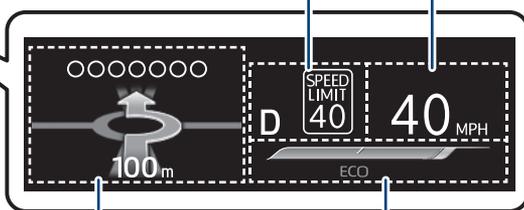

Driving support system status/
navigation system-linked display area

Hybrid System Indicator/
Outside temperature display area

The head-up display projects a variety of driving-related information and the operating state of the driving support systems on the windshield.


Press MID control switches and select “” on the Multi-Information Display (MID) and select “HUD Main” to access Head-up display settings. And press “” to enter selection.

Refer to the “Owner’s Manual” for more details.


FEATURES & OPERATIONS

Air conditioning/heating

FRONT

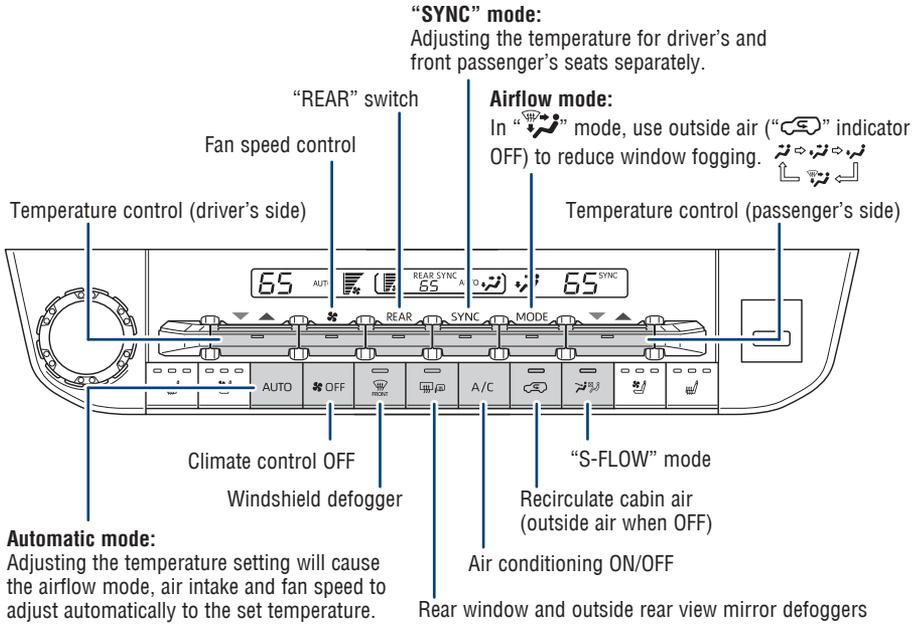


REAR

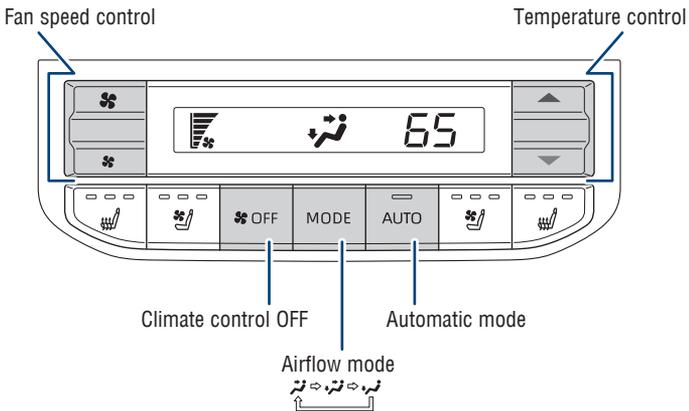

Refer to the “Owner’s Manual” for more details.

Heated steering wheel (if equipped)


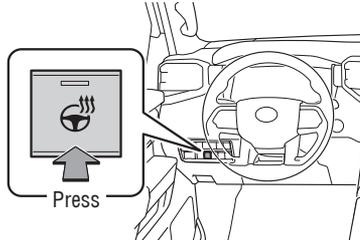


The vehicle must be on for use.

Heated/ventilated seats (if equipped)

FRONT SEAT



REAR SEAT (IF EQUIPPED)

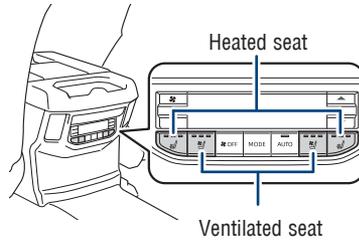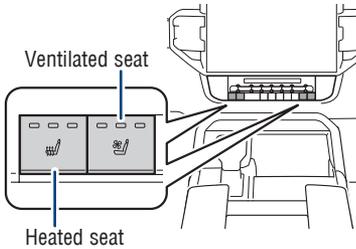

The vehicle must be on for use.

FEATURES & OPERATIONS

Steering wheel switches & telephone controls (Bluetooth®)

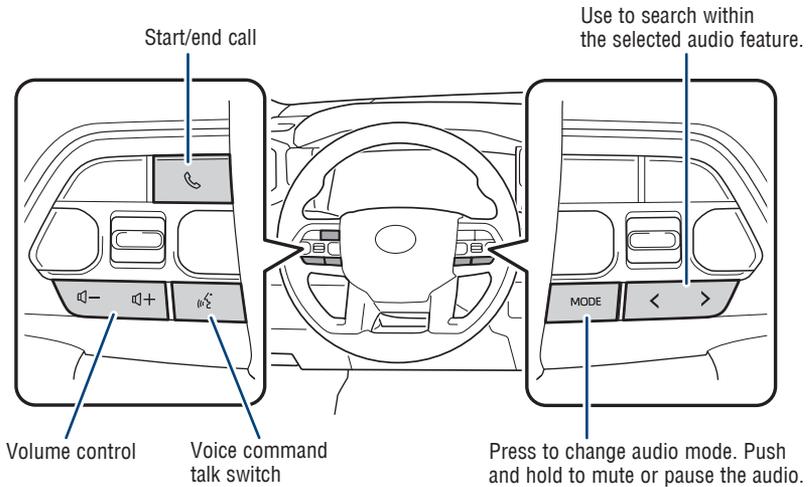


Bluetooth® technology allows dialing or receipt of calls without removing your hands from the steering wheel.

Refer to the Bluetooth® device pairing in this guide or the "Multimedia Owner's Manual" for additional user instructions.


NOTE: Always use safe driving practices and follow all traffic rules.

Audio Multimedia

VEHICLES EQUIPPED WITH 8-in DISPLAY

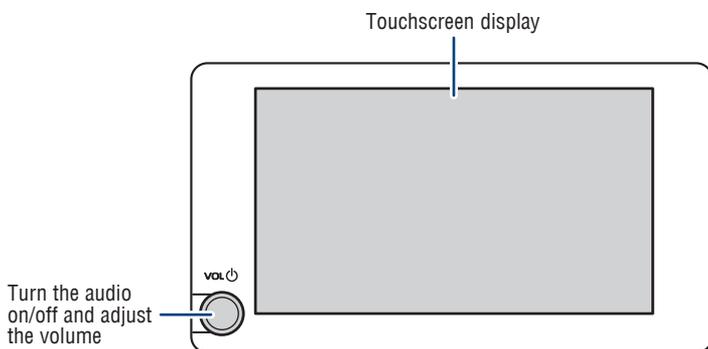


VEHICLES EQUIPPED WITH 14-in DISPLAY

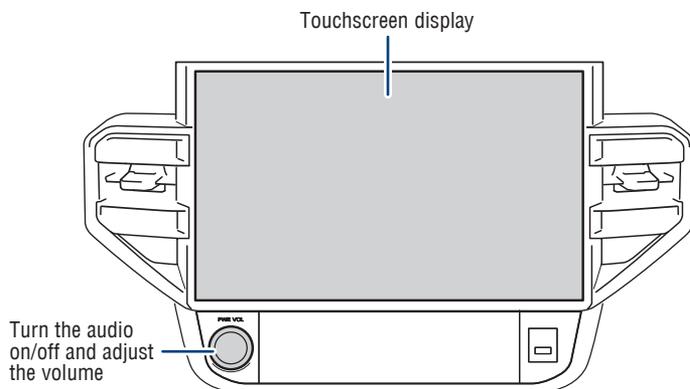

Refer to the “Multimedia Owner’s Manual” or visit www.toyota.com/audio-multimedia for additional resources.

NOTE: Always use safe driving practices and follow all traffic rules.

USB media port

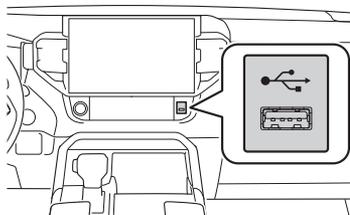


Connecting a compatible device and cable into the USB media port will support charging and music playback through the audio multimedia system.

FEATURES & OPERATIONS


USB charge ports

USB Type-A port: 2.5A / USB Type-C port: 3.0A

In the console box


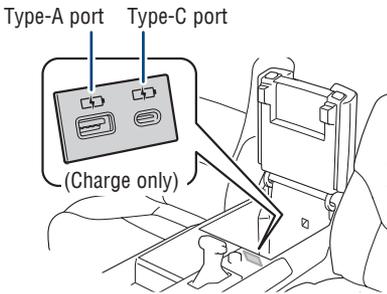


Rear of console box

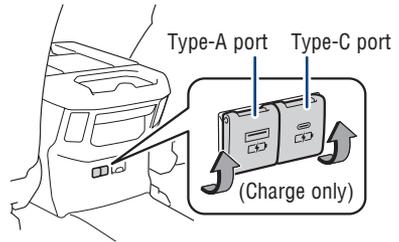

The vehicle must be in the “ACCESSORY” or “IGNITION ON” mode for use.

Qi Wireless charger (if equipped)

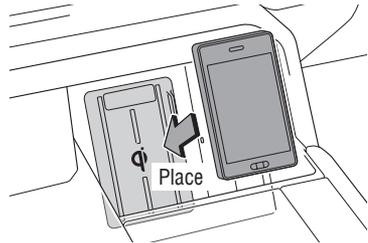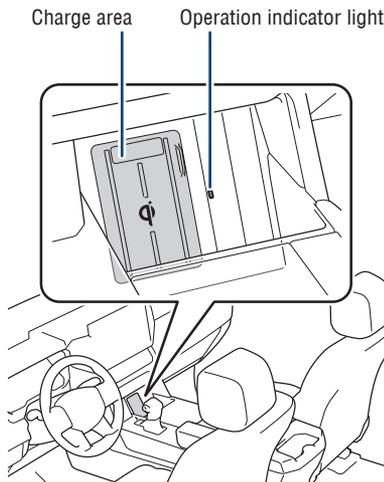


Place device nearest in the center of the charging area for best results. Moving device may result in stopping or restarting the charging process.

A mobile device can be charged wirelessly on the tray. Turn the vehicle to “ACCESSORY” or “ON” mode, then place a compatible mobile device on the tray as shown in the illustration. An amber indicator illuminates while charging is in progress. When charging is complete, the indicator illuminates green. Some phones, cases or cover type wireless chargers may not cause the green indicator to illuminate even though it is fully charged.

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

Power outlet-12V DC

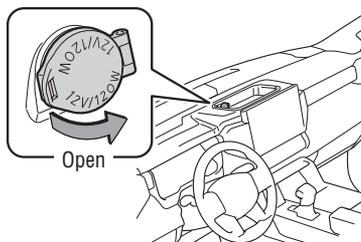


The vehicle must be in the "ACCESSORY" or "IGNITION ON" mode for use.


Power outlets-120V AC (if equipped)

OUTLET LOCATION


Rear of the console box

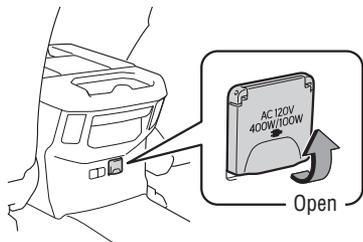

Luggage compartment

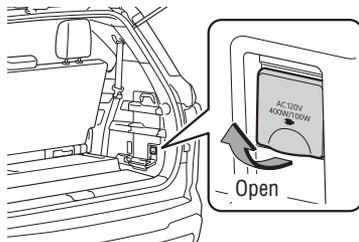

POWER OUTLET ON/OFF MASTER SWITCH

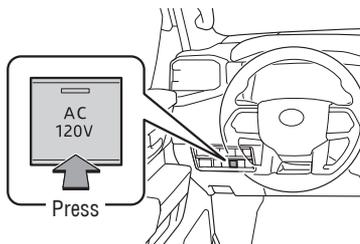

Press the AC 120V master switch. The power outlets can be used when the indicator on the AC 120 V master switch is illuminated.


To turn off the 120 V outlets, press the master switch and observe that the switch is no longer illuminated.

Refer to the "Owner's Manual" for more details.


FEATURES & OPERATIONS

Garage door opener (HomeLink®)*

VEHICLES WITH AUTO ANTI-GLARE INSIDE REAR VIEW MIRROR

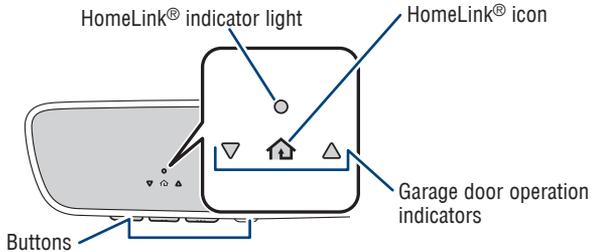

VEHICLES WITH DIGITAL REARVIEW MIRROR

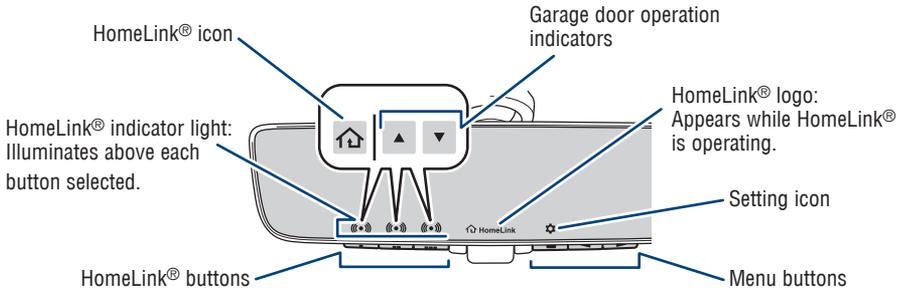

Garage door openers manufactured under license from HomeLink®* can be programmed to operate garage doors, estate gates, security lighting, etc.

Refer to the "Owner's Manual" for more details.

For programming assistance, contact HomeLink® at 1-800-355-3515, or visit www.homelink.com/toyota.




* HomeLink® is a registered trademark of Gentex Corporation.

Electronically modulated air suspension (If equipped)

The electronically modulated air suspension allows the driver to control the vehicle's height in order to adjust for driving conditions. Select the desired height with the height control switch.


HEIGHT CONTROL SWITCH

Height control mode
select switch

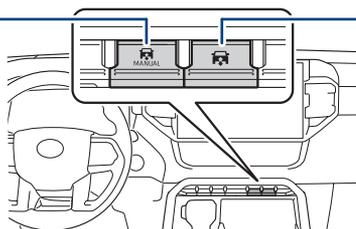

Height control switch

SELECTING VEHICLE HEIGHT



Lower

Higher

Vehicle height can be adjusted only when the engine is running.

The selected height mode will be shown on the electronically modulated air suspension display. The selected mode will flash while the height mode is being changed.


“N” mode (normal mode): For ordinary driving.

“HI” mode (high mode): For driving on bumpy roads 1.6 in. (40 mm) higher than the normal height.

“LO” mode (low mode): For the ease of egress/ingress and loading luggage. 1.2 in. (30 mm) lower than the normal height.

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.


Trailer Backup Guide (if equipped)

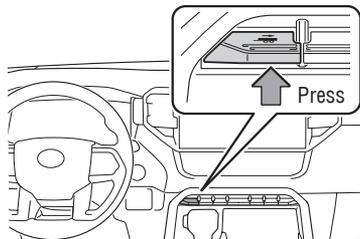

Trailer Backup Guide is a system to assist when backing up a trailer by providing either (1) steering control to assist backing up straight (Straight Path Assist) or (2) guidance for manual steering backup (Guidance mode). Trailer Backup Guide uses the rear camera to detect the trailer and a trailer hitch light, which allows the driver to use the system at night time.


SYSTEM OPERATION

- (1) Press “< >” switches and select “⚙️” from the Multi-Information Display (MID) and add a trailer according to the display.
- (2) Press the switch to turn the system ON.
- (3) Continue or reselect the trailer in the message displayed on the MID.
- (4) Once trailer is detected, shift the shift lever to R to activate Guidance mode.
- (5) Touch the switch at the bottom right on multimedia to activate Straight Path Assist.

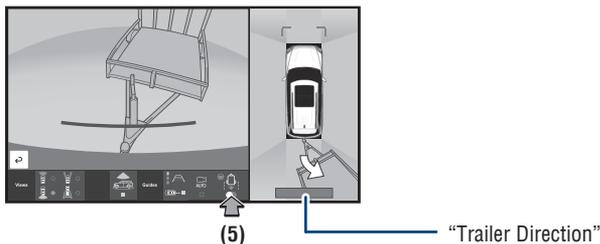

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

Trailer brake controller

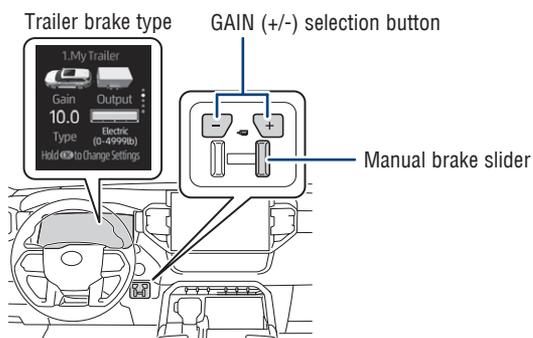

The trailer brakes can be controlled by the Trailer brake controller via the 7-pin connector. By selecting the type of brakes that are being used on the trailer (electric or electric-over-hydraulic) and setting the “gain” for the controller, the manual brake slider is used to slow just the trailer. The vehicle brake pedal will also slow down as well as stop the trailer when applied, also via the same connector. “Gain” values, manual brake outputs, trailer brake types and the trailer connection status are displayed on the Multi-Information Display (MID).

This vehicle comes equipped with a Toyota Genuine Trailer Brake Controller. Use of a third-party trailer brake controller along with the Toyota Genuine Trailer Brake Controller may have unexpected effects on the system.

Toyota does not recommend the use of a thirdparty brake controller with this vehicle.


CHANGING THE SETTING

- (1) Press “<>” switches and select “” from the Multi-Information Display (MID).
- (2) Press “” switches and select “Trailer Settings” and then press and hold “.”
- (3) Select the desired setting and then press “.”

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

FEATURES & OPERATIONS

AUTO LSD system (if equipped)

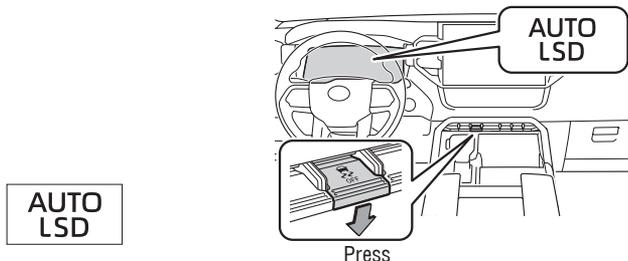


The AUTO LSD system aids traction by using the traction control system to control hybrid system performance and braking when one of the drive wheels begins to spin.

The system should be used only when one of the drive wheels spinning occurs in a ditch or rough surface.

The system can be used only on 2WD models. The system is activated when driving at a speed under 62 mph (100 km/h).

Refer to the "Owner's Manual" for limitations and more details on this system before attempting to use it.

Vehicle Stability Control (VSC)/TRAC / Trailer Sway Control OFF switch

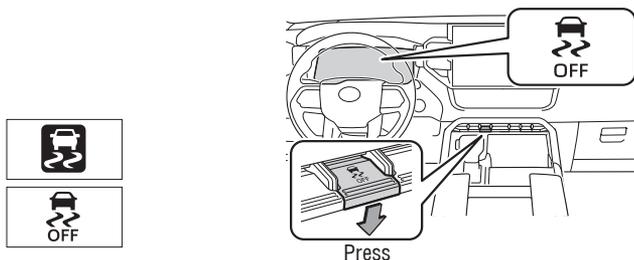


The VSC OFF switch can be used to help free a stuck vehicle in surroundings like mud, dirt or snow. While the vehicle is stopped, press the switch to disable the TRAC system.

To disable VSC/TRAC/Trailer Sway Control systems, press and hold the switch for at least 3 seconds while the vehicle is stopped.


Refer to the "Owner's Manual" for limitations and more details on this system before attempting to use it.

Downhill assist control system (if equipped)

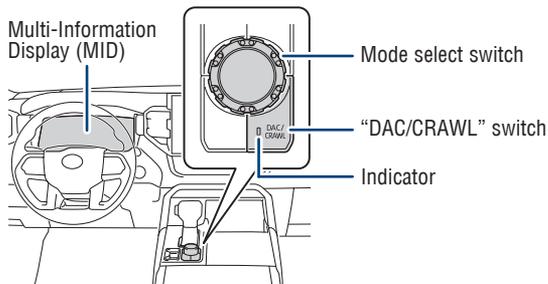

The downhill assist control system is designed to help to prevent excessive speed on steep downhill slopes. The system will operate when the vehicle is traveling under 18 mph (30 km/h) and transfer mode is in "4H".

SYSTEM OPERATION

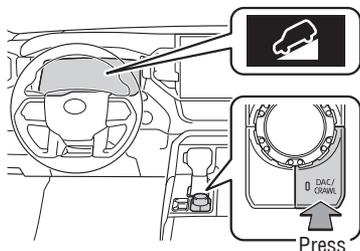


Press the "DAC/CRAWL" switch.

When the system is in operation, the slip indicator will flash, and the stop lights/high mounted stop lights will be lit. A sound may also occur during the operation. This does not indicate a malfunction.

Turning off the system


- When the "DAC/CRAWL" switch indicator illuminates: Press the "DAC/CRAWL" switch again.
- When the "DAC/CRAWL" switch indicator does not illuminate: Press the "DAC/CRAWL" switch to turn the indicator on. Press the "DAC/CRAWL" switch again with the indicator turned on.

SETTING SPEED

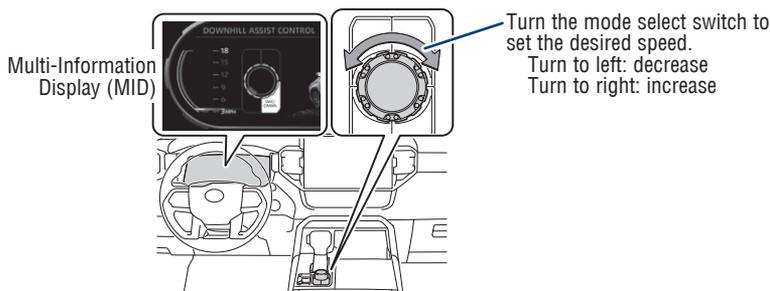


Refer to the "Owner's Manual" for limitations and more details on this system before attempting to use it.

Driving mode select switches

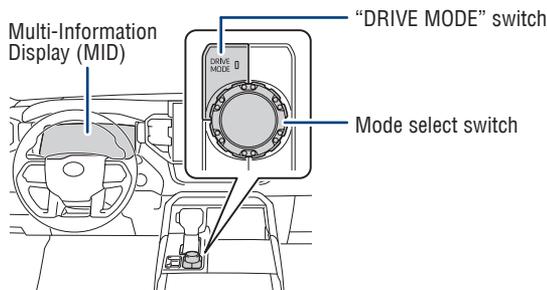


SYSTEM OPERATION

Press the “DRIVE MODE” switch.
The indicator on the switch will turn on.



SELECTING THE DRIVING MODE

Vehicles without Adaptive Variable Suspension system

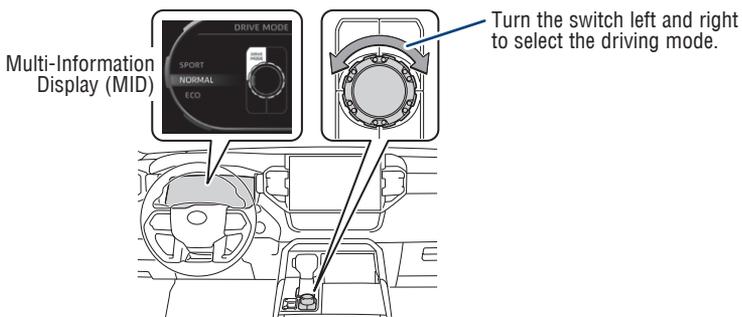


“NORMAL” mode: Suitable for normal driving.

“ECO” mode: Helps achieve lower fuel consumption during trips that involve frequent accelerating and braking.

“SPORT” mode: Use when a higher level of response is desired, such as when driving in mountain roads.

Vehicles with Adaptive Variable Suspension system

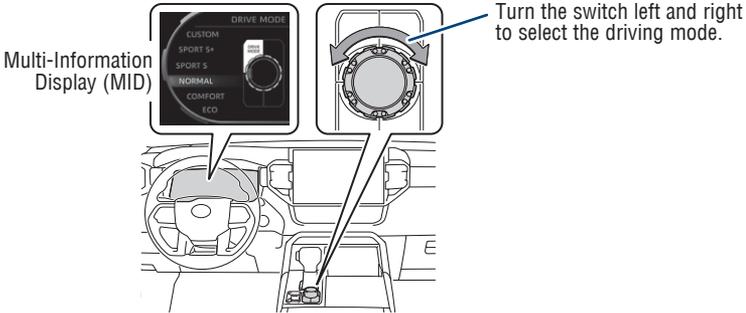

“NORMAL” mode: Suitable for normal driving.

“COMFORT” mode: Suitable for city driving by controlling the suspension comfortably.

“ECO” mode: Helps achieve lower fuel consumption during trips that involve frequent accelerating and braking.


“SPORT S” mode: Use when a higher level of response is desired, such as when driving in mountain roads.

“SPORT S+” mode: Helps to ensure the controllability and stability by integrally controlling the steering wheel and suspensions. Suitable for sporty driving.

“CUSTOM” mode: Allows you to drive with the power train, chassis and air conditioning system functions set to your preferred settings.

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

Rear differential lock system (if equipped)

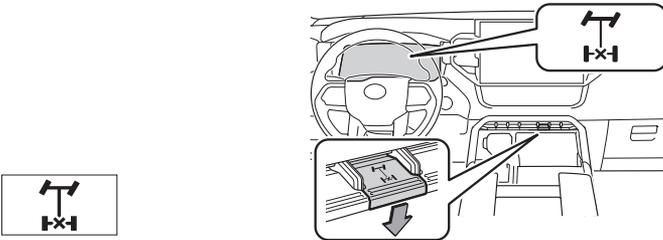


The rear differential lock system is provided for use only when wheel spinning occurs in a ditch or on a slippery or rugged surface. This system is effective in case one of the rear wheels is spinning.

The following systems do not operate when the rear differential is locked. (ABS/ Brake assist system/VSC/Downhill assist control system*/TRAC)

* If equipped.


Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

Crawl Control (if equipped)

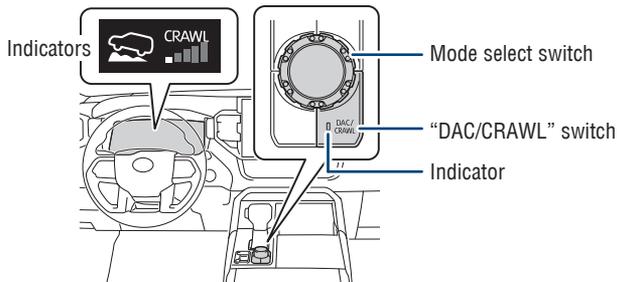

Crawl Control allows travel on extremely rough off-road surfaces at a fixed low speed without pressing the accelerator or brake pedal. Minimizes loss of traction or vehicle slip when driving on slippery road surfaces, allowing for stable driving.

SYSTEM OPERATION

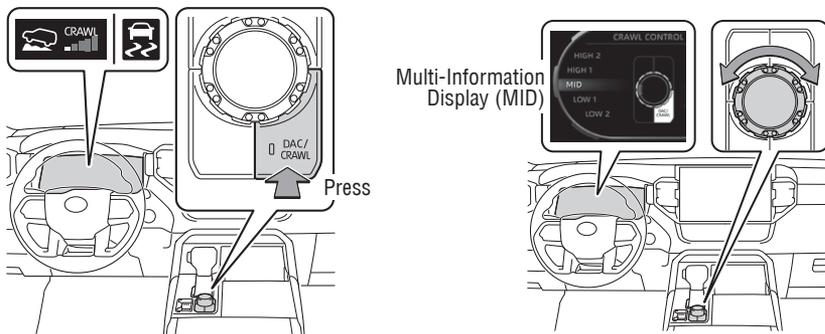


While the vehicle is on, the driver's door needs to be closed and the shift lever is in any gear other than P or N, also the front-wheel drive control is in "4L", then press the "DAC/CRAWL" switch.

The indicator light on the switch and the Crawl Control indicator on the Multi-Information Display (MID) will come on, and the slip indicator will flash. Then turn the mode select switch left or right to select a mode on the MID.

Turning off the system

- When the "DAC/CRAWL" switch indicator illuminates: Press the "DAC/CRAWL" switch again.
- When the "DAC/CRAWL" switch indicator does not illuminate: Press the "DAC/CRAWL" switch to turn the indicator on. Press the "DAC/CRAWL" switch again with the indicator turned on.

SELECTABLE MODES



“LOW 2”: Rocky roads or decline

“LOW 1”: Rocky roads, decline or bumpy incline


“MID”: Bumpy inclines

“HIGH 1”: Bumpy inclines, debris roads, snow-covered roads, muddy roads, gravel roads and grass roads

“HIGH 2”: Bumpy inclines, debris roads, snow-covered roads, muddy roads, gravel roads and grass roads

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

TOW HAUL switch

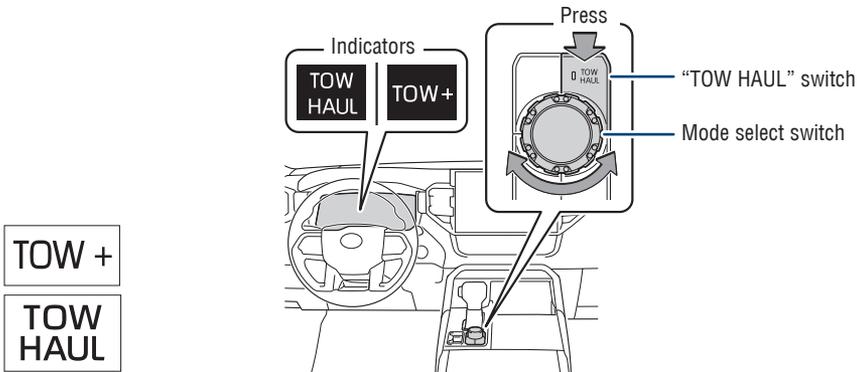


“TOW HAUL” or “TOW+” mode is ideal for use when pulling a trailer or hauling a heavy load. Activating “TOW HAUL” or “TOW+” mode changes engine, transmission, steering, and suspension* to be more suitable when pulling a trailer.

* Vehicle equipped with AVS (Adaptive Variable Suspension system).

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

FEATURES & OPERATIONS


Multi-Terrain Select (if equipped)

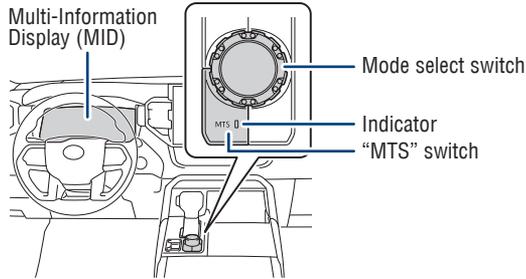

Multi-Terrain Select (MTS) is a system that improves drivability in off-road situations. Select a mode that most closely matches the type of terrain on which you are driving from several modes.

Brake control, steering feel and drive force control can be optimized in accordance with the selected mode.

SYSTEM OPERATION

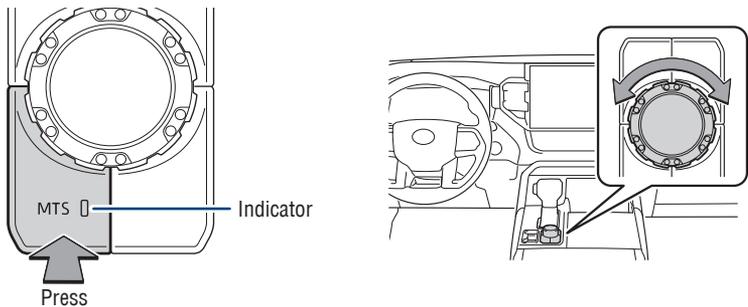

Press the "MTS" switch. The indicator light on the switch will turn on. Then turn the mode select switch left or right to select a mode on the MID.

SELECTING THE MODE

Four-wheel drive control switch is in "4L"



"AUTO": Suitable for the road conditions



"SAND": Sandy roads and other slippery conditions



"MUD": Muddy roads and other slippery conditions



"ROCK": Rocky terrain

Four-wheel drive control switch is in “4H”



“**AUTO**”: Suitable for the road conditions



“**DIRT**”: Bumpy road conditions, such as dirt roads



“**SAND**”: Sandy roads and other slippery conditions




“**MUD**”: Muddy roads and other slippery conditions



“**DEEP SNOW**”: Deep snow roads

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

Four-wheel drive selector (if equipped)



2H

High speed (2WD) Normal driving on dry hard-surfaced roads.

4H

High speed (4WD) For driving only on roads that permit the tires to slide, like off-road, icy or snow-covered roads.

4L

Low speed (4WD)

For maximum power and traction when climbing or descending steep hills, off-road driving, and hard pulling in sand, mud or deep snow.

Shifting between “2H” and “4H”

- Shifting from “2H” to “4H”: Reduce speed to less than 62 mph (100 km/h), push and shift the four-wheel drive control switch to “4H”.
The “4H” indicator will come on.
- Shifting from “4H” to “2H”: Reduce speed to less than 62 mph (100 km/h), push and shift the four-wheel drive control switch to “2H”.
The “4H” indicator will go off.


Shifting between “4H” and “4L”

- Shifting from “4H” to “4L”: Stop the vehicle completely and continue to depress the brake pedal, shift the shift lever to N. Then push and shift the four-wheel drive control switch to “4L”.
The “4L” indicator will come on.
- Shifting from “4L” to “4H”: Stop the vehicle completely and continue to depress the brake pedal, shift the shift lever to N. Then push and shift the four-wheel drive control switch to “4H”.
The “4L” indicator will go off.

NOTE: For best fuel economy and performance under normal driving conditions, keep in “2H” position.

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

Blind Spot Monitor (BSM) and Rear Cross Traffic Alert (RCTA)

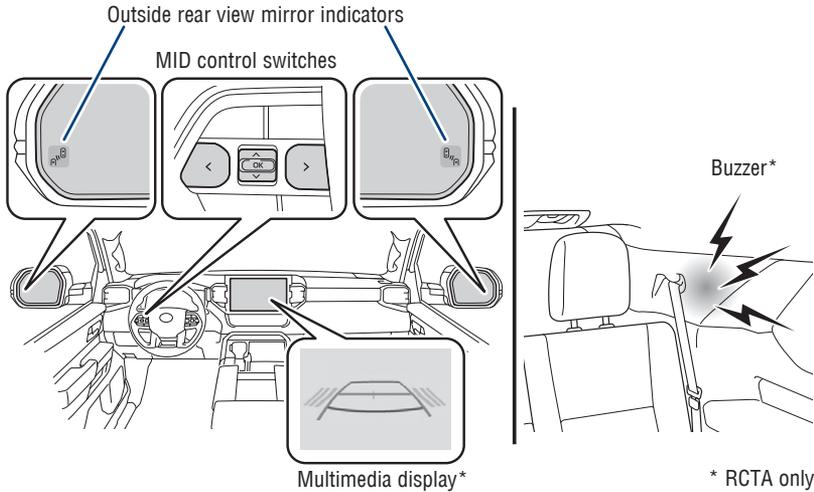

BLIND SPOT MONITOR (BSM)

The system is designed to use radar sensors to detect vehicles traveling in the Sequoia's blind spot. If a vehicle is detected, the driver will be alerted via the outside rear view mirror indicator on the detected side.

REAR CROSS TRAFFIC ALERT (RCTA)


While in reverse, when a vehicle approaching from the right or left rear of the Sequoia is detected, the outside rear view mirror indicators will flash. Also, the RCTA icon for the detected side will be displayed on the multimedia system display, and the RCTA buzzer will sound.

SYSTEM ON/OFF

- (1) Press “<>” switches and select “” from the Multi-Information Display (MID).
- (2) Press “” switches and select “ BSM” or “RCTA” and then press “” to turn the system On/Off.
- (3) Press “” to go back to the menu.

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

Panoramic View Monitor (PVM)




Moving view



Body color setting switch
 Rotation pause switch
 Display mode switching button

See-through view

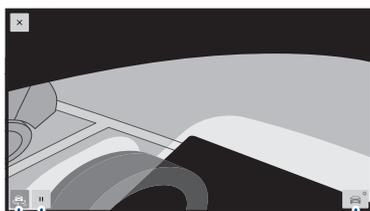

Body color setting switch
 Rotation pause switch
 Display mode switching button

The Panoramic View Monitor (PVM) is design to assist the driver in viewing the surroundings, when operating at low speeds or parking, by combining front, side and rear cameras and displaying an overhead image on the screen.

To view the moving view/see-through view screen, press the camera switch when the shift lever is in the “P” position and the Intuitive parking assist is enabled. Press the camera switch again to display the previous display screen, such as the navigation screen.


Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.

Front and Rear Parking Assist with Automatic Braking (PA w/AB)


Front and Rear Parking Assist with Automatic Braking consists of the following functions that operate when driving at a low speed or backing up, such as when parking. When the system determines that the possibility of a collision with a detected object or pedestrian is high, a warning operates to urge the driver to take evasive action. If the system determines that the possibility of a collision with a detected object or pedestrian is extremely high, the brakes are automatically applied to help avoid the collision or help reduce the impact of the collision.

FUNCTIONALITY


For static objects



When traveling at a low speed and the brake pedal is not depressed, or is depressed late.



When the accelerator pedal is depressed excessively.




When the vehicle moves in the unintended direction due to the wrong shift position being selected.

For rear-crossing vehicles



When reversing, a vehicle is approaching and the brake pedal is not depressed, or is depressed late.

SYSTEM ON/OFF




Press the switch to enable/disable the system.


Refer to the section "Parking Support Brake function" (static objects and rear-crossing vehicles) in the "Owner's Manual" for limitations and more details.

Intuitive parking assist

Multi-Information Display (MID)

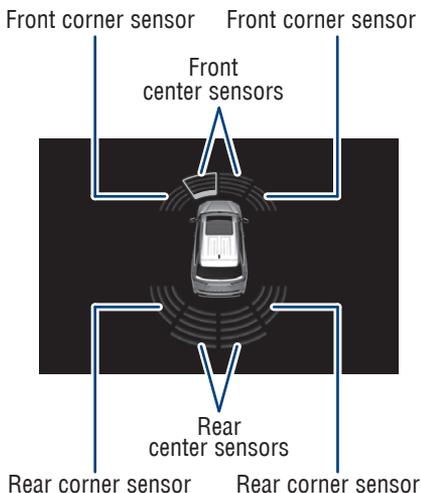

Multimedia display

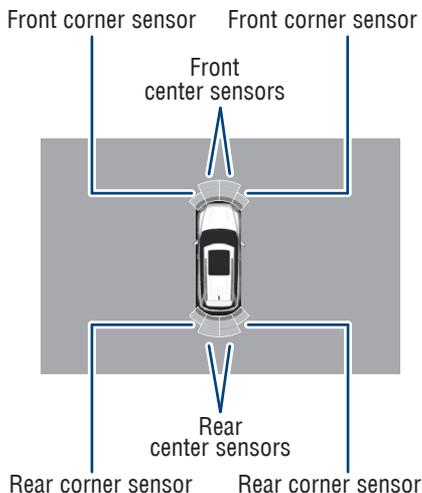

The parking assist sonar system operates when the vehicle approaches an obstacle. The distance from your vehicle to nearby obstacles when parallel parking or maneuvering into a garage is measured by sensors and communicated via the Multi-Information Display (MID) and/or the multimedia display and a buzzer.

When the sensor detects an obstacle, the direction and the approximate distance to the obstacle are displayed on the MID and/or the multimedia display by illuminating continuously (far) or blinking (near), and beeping sounds will switch from intermittent to continuous as you approach and get closer to a detected obstacle. When the sensors detect two or more obstacles, the audible alerts will respond to the nearest zone.

Always check the surrounding area when using this system.

SYSTEM ON/OFF

- (1) Press “<>” switches and select “⚙️” from the Multi-Information Display (MID).
- (2) Press “⬆️” switches and select “P” and then press “OK” to turn the system On/Off.
- (3) Press “➡️” to go back to the menu.

Refer to the “Owner’s Manual” for limitations and more details on this system before attempting to use it.



Quick overview-Toyota Safety Sense™ 2.5

Toyota Safety Sense™ (TSS) 2.5 is a suite of safety and driver assistance technologies designed to support driver awareness, decision making, and vehicle operation. TSS includes features such as Pre-Collision System with Pedestrian Detection, Lane Departure Alert with Steering Assist, and Dynamic Radar Cruise Control.

Refer to the Owner's Manual for details including system operation, limitations, and setting adjustments.

For more information, please visit www.toyota.com/safety-sense.



Pre-Collision System with Pedestrian Detection (PCS w/PD)

PCS w/PD is designed to provide alert, mitigation, and/or avoidance support in certain conditions, when the system determines there is potential for a collision with a detected object.

The advanced grille-mounted radar system is designed to work with the forward-facing camera to help recognize a preceding vehicle, pedestrian or bicyclist in certain conditions.



Lane Tracing Assist (LTA) System

While driving on a road with clear white (yellow) lane lines, the LTA system warns the driver if the vehicle may deviate from the current lane or course, and also can slightly operate the steering wheel to help avoid deviation from the lane or course. Also, while the dynamic radar cruise control with full-speed range is operating, this system will operate the steering wheel to help maintain the vehicle's lane position.

Functions included in the LTA system are Lane Departure Alert with Steering Assist, Vehicle Sway Warning and Lane Centering.




Full-Speed Range Dynamic Radar Cruise Control (DRCC)

Full-Speed Range DRCC is designed to help maintain a pre-set distance to a preceding vehicle when the preceding vehicle is traveling at a lower speed. The minimum set speed is approximately 20 MPH.



Automatic High Beams (AHB)

AHB is designed to detect the headlights of oncoming vehicles and the taillights of preceding vehicles and switch between high beams and low beams as appropriate.




Road Sign Assist (RSA)


RSA is designed to recognize specific road signs using the forward-facing camera to provide information to the driver via the display.

Sensors

TSS 2.5 combines a forward-facing camera mounted in front of the inside rear view mirror and a grille-mounted radar mounted in the front grille. These sensors support the driving assist systems.

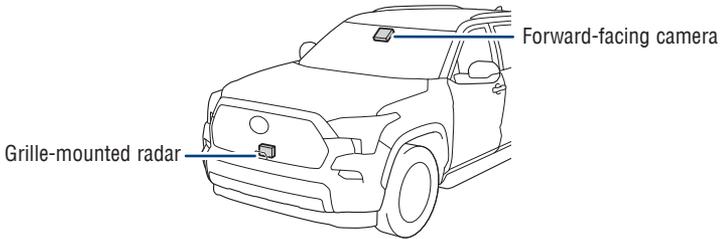

Pre-Collision System with Pedestrian Detection (PCS w/PD)

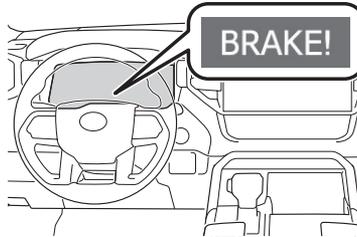

The Pre-Collision System with Pedestrian Detection (PCS w/PD) is designed to help detect a vehicle, bicyclist or pedestrian in certain situations. Using both a camera and radar, PCS w/ PD can provide an audio/visual alert to warn you of a possible collision under certain circumstances. If you don't react, the system is designed to automatically brake.

As there is a limit to the degree of recognition accuracy and control performance that this system can provide, do not overly rely on this system. This system will not prevent collisions or lessen collision damage or injury in every situation. Do not use PCS instead of normal braking operations under any circumstances. Do not attempt to test the operation of the Pre-Collision System yourself, as the system may not operate or engage, possibly leading to an accident. In some situations, such as when driving in inclement weather such as heavy rain, fog, snow or a sandstorm or while driving on a curve and for a few seconds after driving on a curve, a vehicle or pedestrian or bicyclist may not be detected by the radar and camera sensors, preventing the system from operating or engaging properly.

Refer to the Toyota "Owner's Manual" for a list of additional situations in which the system operation may be limited.

PRE-COLLISION SYSTEM (CONTINUED)

Pre-Collision Warning

When the system determines that the possibility of a frontal collision is high, a buzzer will sound and a warning message will be displayed on the Multi-Information Display (MID) to urge the driver to take evasive action.

Pre-Collision Brake Assist

If the driver notices the hazard and brakes, the system may provide additional braking force using Brake Assist. This system may prime the brakes and may apply greater braking force in relation to how strongly the brake pedal is depressed.


Pre-Collision Braking

If the driver does not brake in a set time and the system determines that the possibility of a frontal collision with a preceding vehicle is extremely high, the system may automatically apply the brakes, reducing speed in order to help the driver reduce the impact and in certain cases avoid the collision.

See www.toyota.com/safety-sense for more information.

PCS PEDESTRIAN DETECTION


Under certain conditions, the PCS included with TSS 2.5 may also help to detect a pedestrian or bicyclist in front of your vehicle using the forward-facing camera and the front grille-mounted radar. The forward-facing camera of PCS detects a potential pedestrian or bicyclist based on size, profile, and motion of the detected pedestrian or bicyclist. However, a pedestrian or bicyclist may not be detected depending on the conditions, including the surrounding brightness and the motion, posture, size, and angle of the potential detected pedestrian or bicyclist, preventing the system from operating or engaging.

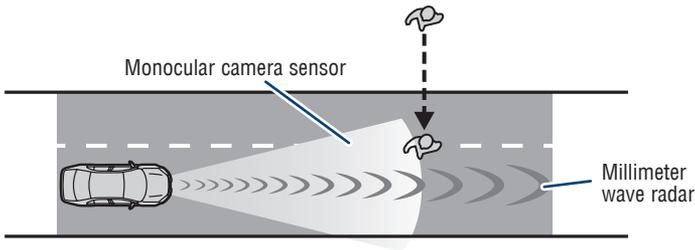

As part of the Pre-Collision System, this function is also designed to first provide an alert and then automatic braking if needed.

Refer to the Toyota "Owner's Manual" for additional limitations and information.


CHANGING PCS WARNING TIMING

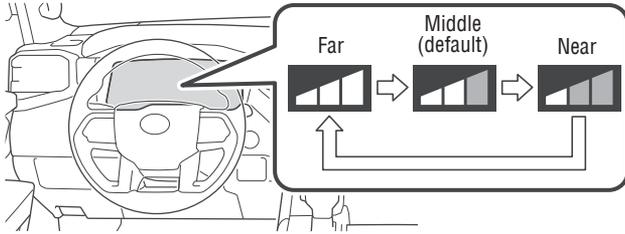

- (1) Press “<>” switches and select “⚙️” from the Multi-Information Display (MID).
- (2) Press “⬆️” switches and select “🚗 PCS” and then press and hold “OK”.
The setting screen is displayed.
- (3) Press “⬆️” switches and select “Sensitivity” and then press “OK” to change the desired setting. Each time it is pressed, the PCS warning timing changes as shown above.
- (4) Press “➡️” to go back to the menu.

Note: PCS is enabled each time the vehicle is turned on. The system can be disabled/enabled and the alert timing of the system can be changed. (Alert timing only, brake operation remains the same.)


DISABLING PRE-COLLISION SYSTEM (PCS)

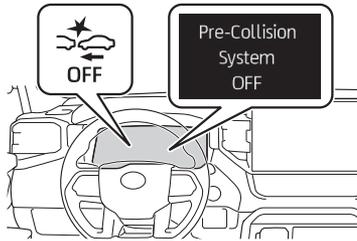

- (1) Press “<>” switches and select “⚙️” from the Multi-Information Display (MID).
- (2) Press “⬆️” switches and select “🚗 PCS” and then press “OK” to turn PCS On/Off.
- (3) Press “➡️” to go back to the menu.

Refer to the Toyota “Owner’s Manual” for additional information on PCS w/PD operation, settings adjustments, limitations, and precautions before attempting to use it.

Lane Tracing Assist (LTA) System



While driving on a road with clear white (yellow) lane lines, the LTA system warns the driver if the vehicle may deviate from the current lane or course, and also can slightly operate the steering wheel to help avoid deviation from the lane or course. Also, while the dynamic radar cruise control with full-speed range is operating, this system will operate the steering wheel to help maintain the vehicle's lane position. The LTA system recognizes white (yellow) lane lines or a course using the front camera. Additionally, it detects preceding vehicles using the front camera and radar.


Functions included in the LTA system are Lane Departure Alert with Steering Assist, Vehicle Sway Warning and Lane Centering.

See www.toyota.com/safety-sense for more information.

Refer to the Toyota "Owner's Manual" for additional information on the LTA system operation, settings adjustments, limitations, and precautions before attempting to use it.

TURNING THE LTA SYSTEM ON/OFF

Press the LTA switch to turn the LTA system On/Off.

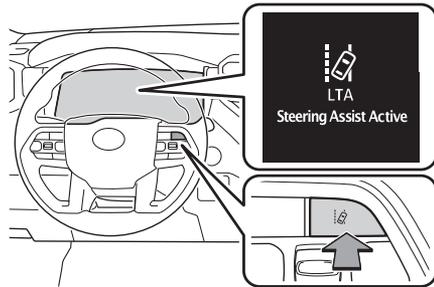


Note: Operation of the LTA system and setting adjustments continues in the same condition regardless of ignition cycle until changed by the driver or the system is reset. The LTA indicator is illuminated when the LTA system is on.

TOYOTA SAFETY SENSE™

LANE DEPARTURE ALERT WITH STEERING ASSIST


Press the LTA switch to turn the LTA system and Lane Departure Alert On/Off.

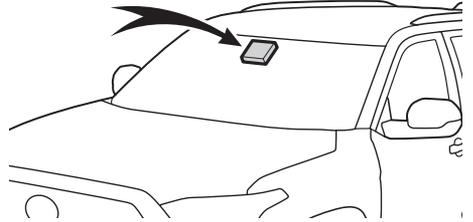

By detecting visible white/yellow lane markings or the road's edge at speeds above 32 mph, Lane Departure Alert with Steering Assist is designed to issue a visual alert and audio or steering vibration alert if an inadvertent lane departure is detected. If the driver does not take corrective action, the Steering Assist function is designed to provide gentle corrective steering.*

* See www.toyota.com/safety-sense for more information and limitations.

LTA system display

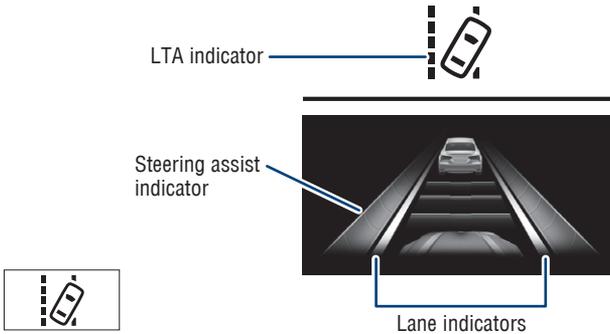

The LTA indicator is illuminated when lane departure alert is active. The LTA indicator and lane indicators flash orange when operating.

LANE DEPARTURE ALERT WITH STEERING ASSIST (CONTINUED)



(1)



(2)

The LTA system  is displayed when the Multi-Information Display (MID) is switched to the driving support system information display.

- (1) The system displays solid white lines on the Lane Departure Alert indicator when visible lane markers or the road edge are detected. A lane indicator flashes orange to alert the driver when the vehicle deviates from its lane.
- (2) The system displays outlines on the Lane Departure Alert indicator when lane markers or the road edge are not detected or the function is temporarily canceled.

Note: When operation conditions are no longer met, a function may be temporarily canceled. However, when the operation conditions are met again, operation of the function is automatically restored. For example, Lane Departure Alert may not function on the side(s) where white/yellow lines are not detectable.

ADJUSTING LANE DEPARTURE ALERT SENSITIVITY

The driver can adjust the sensitivity of the Lane Departure Alert function from the Multi-Information Display (MID) customization screen.

High - Is designed to warn approximately before the front tire crosses the lane marker.


Standard - Is designed to warn approximately when the front tire crosses the lane marker.

- (1) Press “<>” switches and select “” from the Multi-Information Display (MID).
- (2) Press “◇” switches and select “ LTA” and then press and hold “OK.” The setting screen is displayed.
- (3) Press “◇” switches and select “Sensitivity” and then press “OK” to change the desired setting.
- (4) Press “↶” to go back to the menu.

SWAY WARNING SYSTEM



Continuous lane deviations from swaying.



Gentle swaying from driver's inattentiveness.



Acute steering wheel operation after the number of operations decrease due to driver's inattentiveness.

Sway warning is a function of the LTA system and is designed to detect swaying based on the vehicle location in the lane and the driver's steering wheel operation. To help prevent swaying, the system alerts the driver using a buzzer sound and a warning display on the MID.

DISABLING SWAY WARNING SYSTEM

- (1) Press “<>” switches and select “” from the Multi-Information Display (MID).
- (2) Press “” switches and select “ LTA” and then press and hold “.
 The setting screen is displayed.- (3) Press “” switches and select “Sway Warning” and then press “.
 to change the desired setting.- (4) Press “.

ADJUSTING SWAY ALERT SENSITIVITY

- (1) Press “<>” switches and select “” from the Multi-Information Display (MID).
- (2) Press “” switches and select “ LTA” and then press and hold “.
 The setting screen is displayed.- (3) Press “” switches and select “Sway Sensitivity” and then press “.
 to change the desired setting.- (4) Press “.


Note: Operation of the LTA system and setting adjustments continues in the same condition regardless of ignition cycle until changed by the driver or the system is reset.

Refer to the Toyota “Owner’s Manual” for additional information on the LTA system operation, settings adjustments, limitations, and precautions before attempting to use it.


LANE CENTERING

Lane Centering is a function of the LTA system. Turning the LTA system off will deactivate Lane Centering.

Press the LTA switch to deactivate the LTA system and Lane Centering.

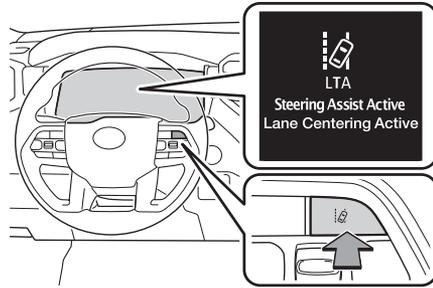


LTA system display

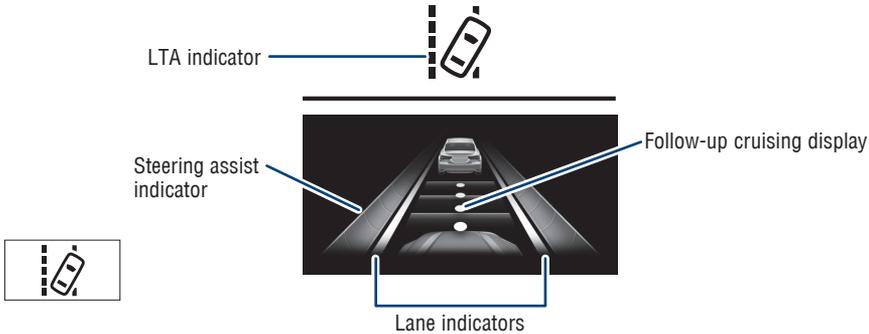

The lane centering function is linked with Full-Speed Range Dynamic Radar Cruise Control (DRCC) and provides the required assistance by operating the steering wheel to help keep the vehicle in its current lane.

When Full-Speed Range Dynamic Radar Cruise Control (DRCC) is not operating, the lane centering function does not operate.

See www.toyota.com/safety-sense for more information.



DISABLING LANE CENTERING FUNCTION

- (1) Press “<>” switches and select “” from the Multi-Information Display (MID).
- (2) Press “” switches and select “ LTA” and then press and hold “.
 The setting screen is displayed.- (3) Press “” switches and select “Lane Center” and then press “.
 The setting is changed.- (4) Press “.

Note: Operation of the LTA system and setting adjustments continues in the same condition regardless of ignition cycle until changed by the driver or the system is reset.


Refer to the Toyota “Owner’s Manual” for additional information on the LTA system operation, settings adjustments, limitations, and precautions before attempting to use it.

Full-Speed Range Dynamic Radar Cruise Control (DRCC)


Intended for highway use, Full-Speed Range Dynamic Radar Cruise Control (DRCC) lets you drive at a preset speed. The system is designed to function between 0-110 mph* and uses vehicle-to-vehicle distance control, helping maintain a preset distance from the vehicle ahead of you.*

* See www.toyota.com/safety-sense for more information

Refer to the Toyota "Owner's Manual" for a list of additional situations in which the system operation may be limited.

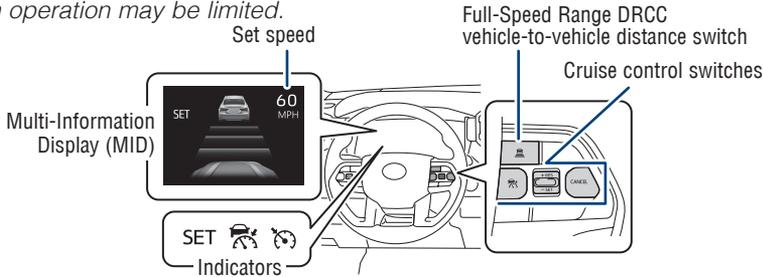


ACTIVATING DRCC

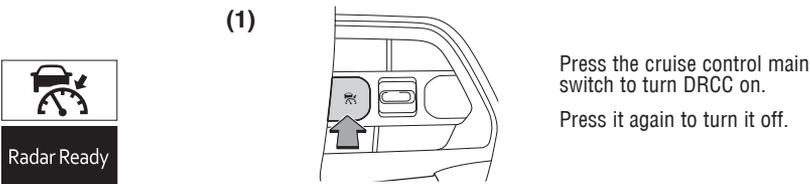

Refer to page 65 for switching to Constant Speed (Cruise) Control Mode.

ADJUSTING SET VEHICLE SPEED

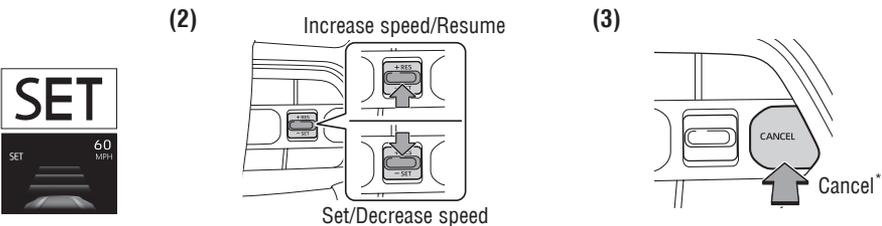


The vehicle will cruise at a set speed, decelerate to maintain a selected distance from a slower preceding vehicle and accelerate back up to the selected speed if the vehicle in front changes lanes or speeds up.

- (1) Press " to turn DRCC system on. The "Radar Ready" and " indicator will come on.
- (2) Press the "**-SET**" switch to set the speed. To increase speed by pressing "**+RES**" or decrease the speed by pressing "**-SET**". Press and hold to make a large adjustment or press each time to make fine adjustments (1 mph [1.6 km/h] or 1 km/h [0.6 mph] increments.)
- (3) Press "**Cancel**" to cancel the speed control.


* The speed control may also be canceled by depressing the brake pedal.

ADJUSTING DISTANCE

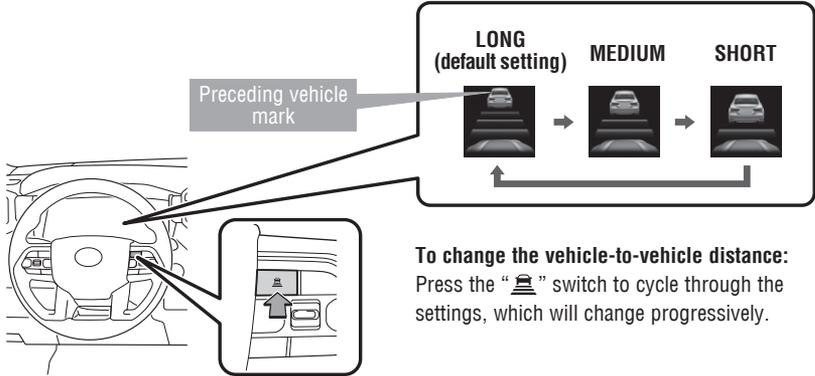

This mode employs a radar sensor to detect the presence of a preceding vehicle up to approximately 328 ft (100 m) ahead, determines the current vehicle-to-vehicle following distance and operates to maintain a preset following distance from the vehicle ahead. These distances vary based on the vehicle speed.

Note: Vehicle-to-vehicle distance will close in when traveling on long downhill slopes.

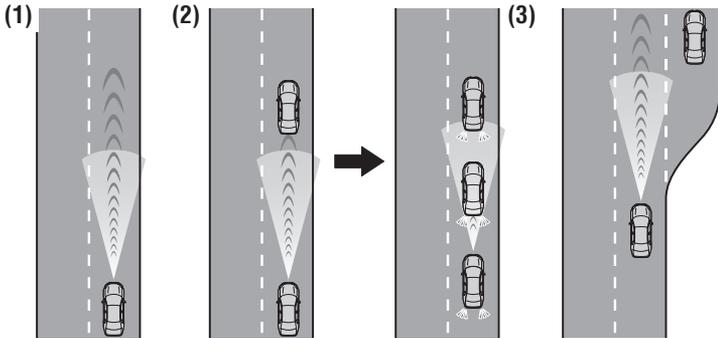

(1) Constant speed cruising when there are no vehicles ahead

The vehicle travels at the speed set by the driver. The desired vehicle-to-vehicle distance can also be set by operating the vehicle-to-vehicle distance control switch.

(2) Deceleration cruising and follow-up cruising when a preceding vehicle driving slower than the set speed appears

When a slower vehicle is detected running ahead of you, the system automatically decelerates your vehicle. When a greater reduction in vehicle speed is necessary, the system may apply the brakes (the brake lights will come on at this time). The system will respond to changes in the speed of the vehicle ahead in order to maintain the vehicle-to-vehicle distance set by the driver. A warning tone warns you when the system cannot decelerate sufficiently to prevent your vehicle from closing in on the vehicle ahead.


ADJUSTING DISTANCE (CONTINUED)

(3) Acceleration when there are no longer any preceding vehicles driving slower than the set speed

The system accelerates until the set speed is reached. The system then returns to constant speed cruising.

Note: When your vehicle is too close to a vehicle ahead, and sufficient automatic deceleration via the cruise control is not possible, the display will flash and the buzzer will sound to alert the driver. An example of this would be if another driver cuts in front of you while you are following a vehicle. Depress the brake pedal to ensure an appropriate vehicle-to-vehicle distance.


SWITCHING TO CONSTANT SPEED (CRUISE) CONTROL MODE

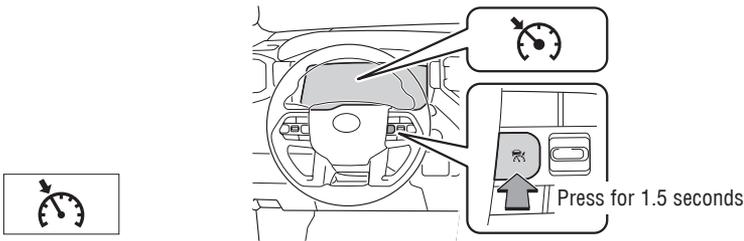

Press and hold the cruise control main switch “” for at least 1.5 seconds to turn on constant speed cruise control. If you are already using DRCC, press the cruise control main switch “” to turn DRCC off before activating constant speed cruise control.

Note: When the vehicle is turned off, it will automatically default to DRCC.


SETTING CONSTANT SPEED (CRUISE) CONTROL

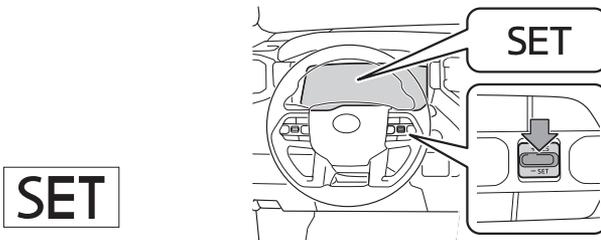

To adjust speed or cancel, see steps (2) and (3) of ADJUSTING SET VEHICLE SPEED on page 63.

Refer to the Toyota “Owner’s Manual” for additional information on DRCC operation, settings adjustments, limitations, and precautions before attempting to use it.

Automatic High Beams (AHB)

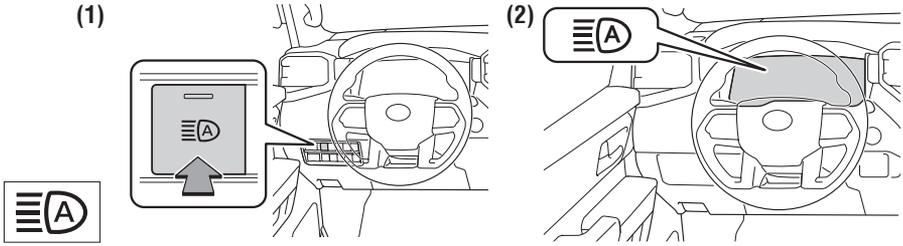

The Automatic High Beams (AHB) safety system is designed to help the driver see more clearly at night. At speeds above 21 mph, AHB can detect the headlights of oncoming vehicles and taillights of preceding vehicles, then automatically toggles between high and low beams accordingly.

See www.toyota.com/safety-sense for more information.

Refer to the Toyota “Owner’s Manual” for additional information on AHB operation, settings adjustments, limitations, and precautions before attempting to use it.

ACTIVATING THE AHB SYSTEM

- (1) Press the “” switch.
- (2) Turn the headlight switch to the “” or “**AUTO**” position.

The AHB indicator “” will come on when the headlights are on and the headlight switch lever is in the low beam position to indicate the system is active.

Note: Push the lever away from you to manually turn on high beams. Press the AHB switch to turn the AHB system off.

CONDITIONS WHERE AHB WILL TURN ON/OFF AUTOMATICALLY


When all of the following conditions are met, the high beams will be automatically turned on (after approximately 1 second):

- The vehicle speed is approximately 21 mph (34 km/h) or more.
- The area ahead of the vehicle is dark.
- There are no oncoming or preceding vehicles with headlights or taillights turned on.
- There are few streetlights on the road ahead.

If any of the following conditions occur, the high beams will be automatically turned off:

- The vehicle speed drops below approximately 17 mph (27 km/h).
- The area ahead of the vehicle is not dark.
- Oncoming or preceding vehicles have headlights or taillights turned on.
- There are many streetlights on the road ahead.

TEMPORARILY SWITCHING TO THE LOW BEAMS

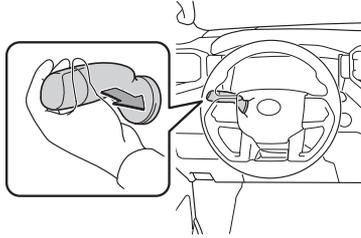

Pull the lever toward you and then return it to its original position to switch to the low beams temporarily.

The high beams are on while the lever is pulled toward you. However, after the lever is returned to its original position, the low beams remain on for a certain period of time. Afterwards, the Automatic High Beams will be activated again.


NOTE: It is recommended to switch to the low beams when the high beams may cause problems or distress to other drivers or pedestrians nearby.

Road Sign Assist (RSA)


Using the forward-facing camera and/or navigation system (if equipped), Road Sign Assist (RSA) is designed to detect certain road signs and display them on the instrument cluster.

*All vehicle actions must be driver-initiated and are not automated.
Refer to the Toyota "Owner's Manual" for additional information and limitations.*

RSA DISPLAY

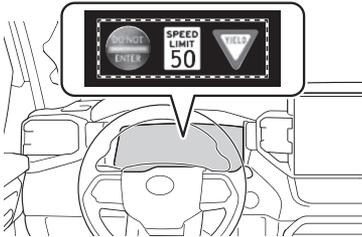

When the driving support system information is selected, a maximum of 3 signs can be displayed.

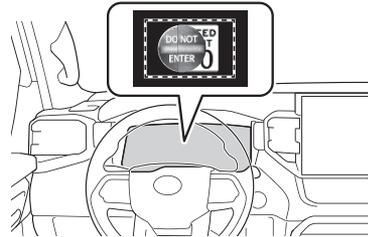

When a tab other than the driving support system information is selected, the following types of road signs will be displayed.

- Speed limit sign
- Do Not Enter sign (when notification is necessary)

TOYOTA SAFETY SENSE™

SUPPORTED TYPES OF ROAD SIGNS



Speed limit



Stop



Do Not Enter



Yield


SYSTEM ON/OFF

- (1) Press “< >” switches and select “” from the Multi-Information Display (MID).
- (2) Press “” switches and select “ RSA” and then press “” to turn RSA On/Off.
- (3) Press “” to go back to the menu.

Note: If the vehicle was last turned off while a speed limit sign was displayed on the Multi-Information Display (MID), the same sign displays again when the vehicle is turned back ON.

Refer to the Toyota “Owner’s Manual” for additional information on RSA operation, settings adjustments, limitations, and precautions before attempting to use it.

Tire Pressure Monitoring (warning) System (TPMS)



The tire pressure warning system can be selected on “” of the Multi-Information Display (MID).

System reset initialization

- (1) Press “<>” switches and select “” from the Multi-Information Display (MID).
- (2) Press “” switches and select “Vehicle Settings,” and then press and hold “.
- (3) Press “” switches and select “TPWS” and then press “.
- (4) Press “” switches and select “Set Pressure” and then press and hold “.

Message will be displayed on the MID and the warning light will blink 3 times.

When the message disappears, initialization is complete.

The tire pressure detected by the tire pressure warning system can be displayed on the Multi-Information Display (MID).



If the tire pressure indicator flashes for approximately 1 minute and then remains on, take the vehicle to your local Toyota dealer.

Refer to the load label on the door jamb or the “Owner’s Manual” for tire inflation specifications.

NOTE: The warning light may come on due to temperature changes or changes in tire pressure from natural air leakage. If the system has not been initialized recently, setting the tire pressures to factory specifications should turn off the light.

SAFETY & EMERGENCY FEATURES

Seat belts

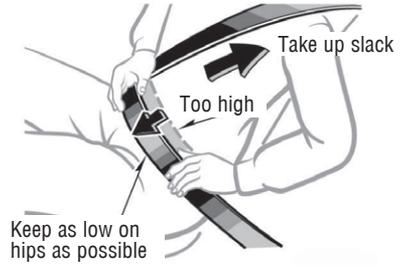


NOTE: If a passenger's seat belt is fully extended, then retracted even slightly, the Automatic locking retractor (ALR) will prevent it from being re-extended beyond that point, unless fully retracted again. This feature is used to help hold child restraint systems securely.

To find more information about seat belts, and how to install a child restraint system, refer to the "Owner's Manual".


Seat belts-Shoulder belt anchor

Front seats

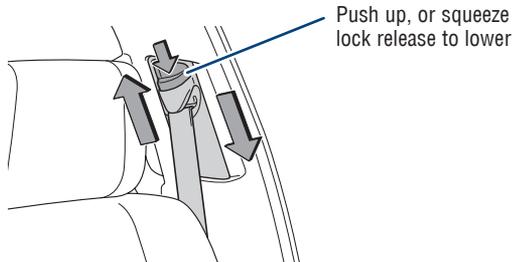


Rear door child safety locks

Rear door

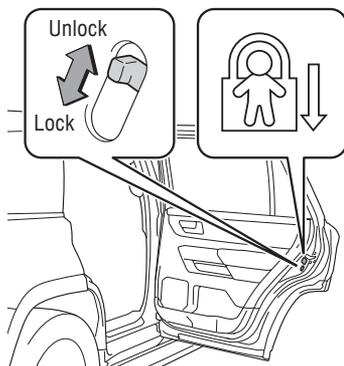

Moving the lever downward will allow the door to be opened only from the outside.

Safety Connect®

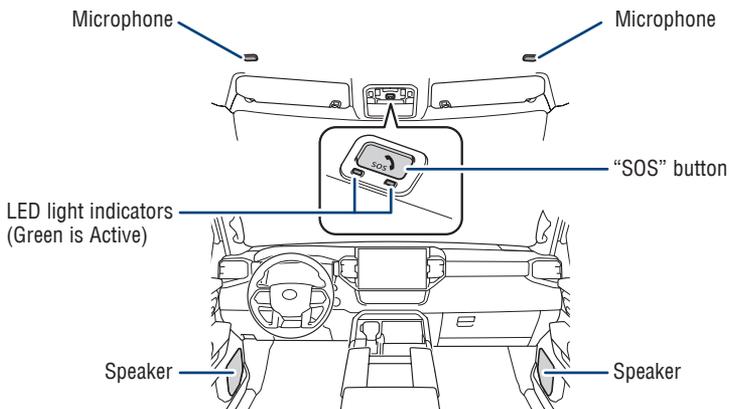

Safety Connect is a subscription-based telematics service that uses Global Positioning System (GPS) data and embedded cellular technology to provide safety and security features to subscribers. Safety Connect is staffed with live agents at the Toyota response center, which operates 24 hours per day, 7 days per week.

Services for subscribers include:



- Automatic collision notification
- Stolen vehicle locator
- Emergency assistance ("SOS" button)
- Enhanced roadside assistance

For limitations and additional information, refer to the "Owner's Manual" or visit www.toyota.com/connected-services.


SAFETY & EMERGENCY FEATURES


Spare tire & tools


TOOL LOCATION

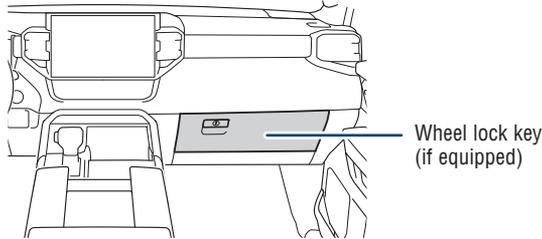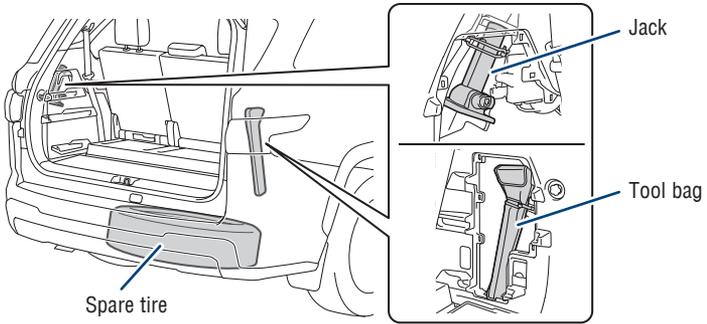



REMOVING THE SPARE TIRE

- 

Assemble the jack handle.
- 

Remove the cover.
- 

Insert the jack handle extension into the lowering screw.
- 

Turn it counterclockwise lower the spare tire completely to the ground.
- 

Remove the holding bracket.

Refer to the "Owner's Manual" for tire changing and jack positioning procedures.

Star Safety System™

Your vehicle comes standard with the Star Safety System™, which combines Anti-lock Braking System (ABS), Brake Assist (BA), Electronic Brake-force Distribution (EBD), Smart Stop Technology (SST), Traction Control (TRAC) and Vehicle Stability Control (VSC).

Refer to the “Owner’s Manual” for more details and important information on limitations to these systems.

ANTI-LOCK BRAKE SYSTEM (ABS)

Toyota’s Anti-lock Brake System detects which wheels are locking up and limits wheel lockup by “pulsing” each wheel’s brakes independently. Pulsing releases brake pressure repeatedly for fractions of a second. This helps the tires attain the traction that current road conditions will allow, helping you to stay in directional control.

BRAKE ASSIST (BA)

Brake Assist is designed to detect sudden or “panic” braking, and then add braking pressure to help decrease the vehicle’s stopping distance. When there’s only a split second to react, Brake Assist can add additional brake pressure more quickly than just the driver alone can.

ELECTRONIC BRAKE FORCE DISTRIBUTION (EBD)

Toyota’s ABS technology has Electronic Brake-force Distribution (EBD) to help maintain control and balance when braking. EBD responds to sudden stops by redistributing brake force to enhance the braking effectiveness of all four wheels.

SMART STOP TECHNOLOGY (SST)

Smart Stop Technology automatically reduces engine power when the accelerator and brake pedals are pressed simultaneously under certain conditions.

SST engages when the accelerator is depressed first and the brakes are applied firmly for longer than one-half second at speeds greater than five miles per hour.

SST doesn’t engage if the brake pedal is depressed before the accelerator pedal, allowing vehicles to start on a steep hill and safely accelerate without rolling backward.

VEHICLE STABILITY CONTROL (VSC)

VSC helps prevent loss of traction during cornering by reducing engine power and applying brake force to selected wheels.

Toyota’s VSC monitors steering angle and the direction your vehicle is traveling. When it senses that the front or rear wheels begin to lose traction, VSC reduces engine power and applies braking to selected wheels. This helps restore traction and vehicle control.

SAFETY & EMERGENCY FEATURES

TRACTION CONTROL (TRAC)

VSC helps prevent loss of traction during cornering by reducing engine power, and Traction Control helps maintain traction on loose gravel and wet, icy, or uneven surfaces by applying brake force to the spinning wheel(s).

Toyota's TRAC sensors are activated when one of the drive wheels starts to slip. TRAC limits engine output and applies the brakes to the spinning wheel. This transfers power to the wheels that still have traction to help keep you on track.

Trailer Sway Control

Trailer sway may occur when towing a trailer due to strong crosswinds, uneven and/or winding road conditions or the driver's steering input.

Trailer Sway Control uses sensors to detect trailer sway and then simultaneously and automatically helps to suppress the swaying motion of the trailer by integrating brake and engine torque control to reduce speed and to help quickly control the swaying motion of the trailer.

Floor mat installation

There are two types of Toyota floor mats: carpeted and all-weather. Each vehicle has model-specific floor mats. Installation is easy.

To keep your floor mat properly positioned, follow these steps:

- Only use Toyota floor mats designed for your specific model.
- Only use one floor mat at a time, using the equipped fasteners to keep the mat in place.
- Install floor mats right side up.



GETTING STARTED WITH TOYOTA AUDIO MULTIMEDIA AND CONNECTED SERVICES

- Registering Your Vehicle
- Toyota app
- Bluetooth® Pairing
- Connected Services
- Apple CarPlay®
- Android Auto™
- SiriusXM®
- Online Support Tool
- Updating System Software

Scan QR Code to Download Toyota app

Apple



Android




Do not attempt the process while driving.

Registering Your Vehicle

With the Toyota app, you will be connected to your Toyota on the go. Use the app to personalize your profile and take the customized vehicle settings and preferences for the multimedia features you enjoy most with you too. Get real time vehicle health information, enjoy remote service, manage your Connected Services subscriptions and more.



STEP 1 Start the vehicle and select your language preference.

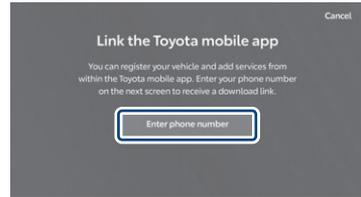


STEP 2 Select “Enter phone number.”




STEP 3 Enter your mobile phone number to receive a link to download the Toyota app.

STEP 4 Download and open the Toyota app on your device and follow instructions to add your vehicle by scanning the QR Code displayed on your vehicle's screen. Complete the steps in your Toyota app to create your profile, activate included trial services and enable access in your vehicle.

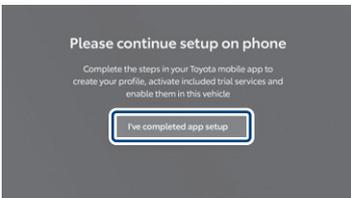

STEP 5 Once complete, select “I've completed app setup”.

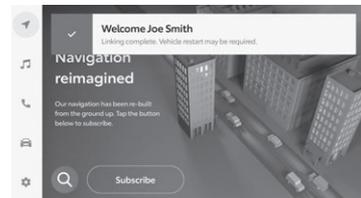

STEP 6 A welcome banner will be displayed on screen to confirm linking is complete.

Toyota app



TOYOTA

Toyota app allows access to valuable information about your vehicle and control of capable features equipped with your vehicle.

- Manuals & Warranties
- Schedule Maintenance
- Roadside Assistance
- Vehicle Health Report
- SiriusXM® Radio
- Safety Recalls
- Toyota Financial Services - Vehicle Payment

Remote Connect equipped vehicle functions:

- Lock/Unlock
- Start Vehicle
- Vehicle Finder
- Guest Driver settings
- Hazard Lights On

Scan QR Code to Download Toyota app.

Apple



Android



Or

Search "Toyota" at your applicable app store.




If you have a Toyota Owner's account, use your credentials to "Sign In" and get started with Toyota app.

Or

If you do not have a Toyota Owner's account, "Register" now to get started with Toyota app.




Bluetooth® Pairing¹



Note:
Do not attempt the Bluetooth® Pairing process while driving.


STEP 1 Select [GEAR ICON] from the main menu, then “Bluetooth & Devices.”

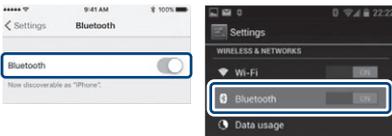


iPhone Bluetooth Menu

Android Bluetooth Menu


STEP 2 Ensure Bluetooth is turned on for your phone.

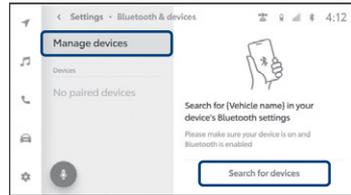

STEP 3 Select “Manage devices,” then “Search for devices.”




STEP 4 Select “Device name” to register.

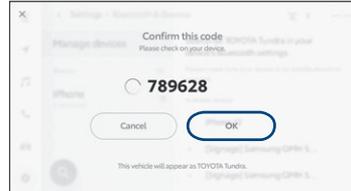

STEP 5 Check that the displayed PIN code matches the PIN code displayed on the Bluetooth® device, and then select [OK].

Bluetooth® Pairing¹ (continued)



STEP 6 If your device supports Apple CarPlay / Android Auto, select **“Yes”** to enable.




STEP 7 While pairing your device, a message may display asking to check your device to allow syncing contacts and allow messaging.

Note: You may also select **“Skip”** on display screen to skip enabling notifications. If skipped, proceed to **STEP 9**.



STEP 8 Turn on **“Show Notifications”** for iPhone® or **“ON”** for Android.

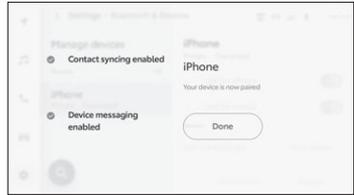

STEP 9 A confirmation will appear once your phone has been paired and connected.

Connected Services²

Your vehicle may come available with a trial period for the following Connected Services.

Learn more at www.toyota.com/connected-services/.

Safety Connect³

- (SOS) EMERGENCY ASSISTANCE BUTTON
- AUTOMATIC COLLISION NOTIFICATION
- ROADSIDE ASSISTANCE
- STOLEN VEHICLE LOCATOR

Remote Connect⁴ (if equipped)

- START VEHICLE
- VEHICLE STATUS ALERTS
- HAZARD LIGHTS ON
- LOCK/UNLOCK VEHICLE DOORS
- VEHICLE FINDER

Completing the registration process is required to enable Remote Connect.

Service Connect⁵ (if equipped)

- VEHICLE HEALTH REPORT
- VEHICLE MAINTENANCE ALERT NOTIFICATION

Completing the registration process is required to enable Service Connect.

Drive Connect

- CLOUD NAVIGATION
- DESTINATION ASSIST
- INTELLIGENT ASSISTANT

Connected Services² (continued)


Wi-Fi Connect⁷

Multiple mobile devices

- Connect up to 5 Wi-Fi enabled devices
- Passengers can use smartphones, laptops and tablets

Infotainment

- Browse the internet
- Send and receive email
- Stay connected on social media
- Access favorite apps
- Stream movies




Several factors may affect smartphone and/or system performance including:

1. Smartphone operating system software version
2. Smartphone battery power level
3. Poor cellular reception to the smartphone
4. Multiple applications running on a smartphone at the same time
5. Charge/media cable quality
6. Smartphone operating system updates may also affect Toyota app functionality

For additional information, please visit: www.toyota.com/connected-services

Connected Services Online Support

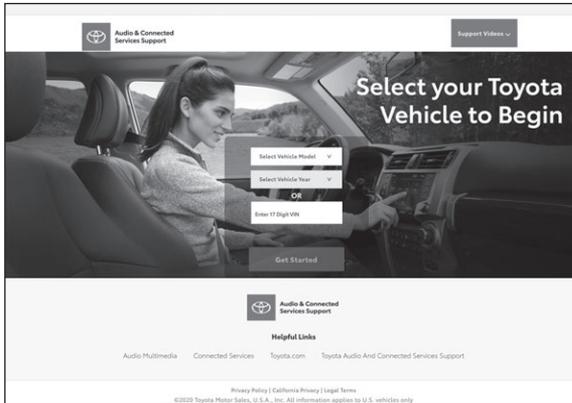

Toyota's online support tool provides intuitive "How-To" instruction and videos.

To begin, please visit: <https://toyotaaudioandconnectedservicesupport.com/>

Apple CarPlay® (Compatible iPhone® required)

Setup of Apple CarPlay®



STEP 1 Ensure Siri® is enabled on your phone.




STEP 2 Plug a compatible iPhone® into the USB media port using an Apple® approved cable or have the smartphone and vehicle connected through Bluetooth®.



STEP 3 On the multimedia system, select “Yes” when asked if you would like to Enable Apple CarPlay®.



STEP 4 Select Allow to use CarPlay® while the phone is locked.



* Screen depiction accurate at time of posting.

STEP 5 To launch Apple CarPlay®, select the Apple CarPlay® icon on the top of the side menu bar.



* Screen depiction accurate at time of posting.

STEP 6 Apple CarPlay® is now ready to operate. You can go back to the Toyota multimedia system by using the Toyota icon in the Apple CarPlay® screen.

Requirements:

Bluetooth® functions will be inoperable while CarPlay® is in use. Wireless CarPlay® is supported. Features may vary by vehicle model and phone.


To learn more about how your iPhone® works with CarPlay® visit: <https://support.apple.com/en-us/HT205634>

To view a full list of CarPlay® supported apps visit: <https://www.apple.com/ios/carplay/>

GETTING STARTED WITH

Apple CarPlay® (Compatible iPhone® required) (continued)

Siri® through CarPlay®



Voice command talk switch

Press and hold the voice command talk switch for 2-3 seconds to activate.



* Screen depiction accurate at time of posting.

Once Siri® is activated you can ask to: make calls, send and receive text messages, listen to music and more.

Android Auto™ (Compatible Android™ device required)

Setup of Android Auto™



STEP 1 With Android 9 or below, the Android Auto™ app download is required. With Android 10, Android Auto™ is built in and the app is NOT required.



STEP 2 Open Android Auto™ app and tap get started.




STEP 3 Ensure Android Auto™ is enabled on the phone.



STEP 4 Plug a compatible Android™ smartphone into the USB media port using an Android approved cable or have the smartphone and vehicle connected through Bluetooth®.

Setup of Android Auto™ (continued)

STEP 5 On the multimedia system, select “Yes” when asked if you would like to Enable Android Auto™.



STEP 6 To launch Android Auto™, select the Android Auto™ icon on the top of the side menu bar.

Requirements:

Bluetooth® functions will be inoperable while Android Auto™ is in use. Wireless Android Auto™ is supported. Features may vary by vehicle model and phone.


To learn more about how to use Android Auto™ visit: <https://www.android.com/auto>



* Screen depiction accurate at time of posting.

STEP 7 Android Auto™ is now ready to operate. You can go back to the Toyota multimedia system by using the Toyota icon in the Android Auto™ screen.

Google Assistant through Android Auto™

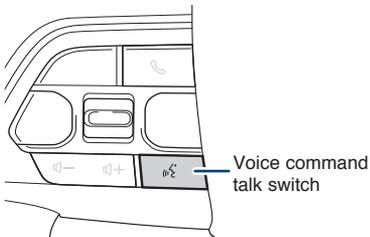

Press and hold the voice command talk switch for 2-3 seconds to activate.



* Screen depiction accurate at time of posting.

Once Google Assistant is activated, you can ask to: make calls, send and receive text messages, listen to music and more.

GETTING STARTED WITH

SiriusXM® 8 (If equipped)

SiriusXM® Audio




* Screen depiction accurate at time of posting.

Toyota vehicles equipped with SiriusXM® come with a 3-month Platinum Plan trial subscription. With the Platinum Plan, you get 425+ channels, including 165+ channels in your vehicle to enjoy ad-free music, plus sports, news, talk, comedy and more. Experience even more on the SXM App, featuring a collection of podcasts, Xtra channels of music, personalized Pandora® stations, SiriusXM video and more.



Audio Multimedia Online Support

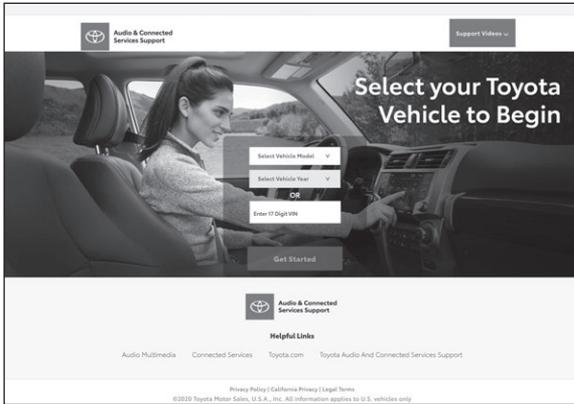

Toyota’s online support tool provides intuitive “How-To” instruction and videos. To begin, please visit: <https://toyotaaudioandconnectedservicesupport.com/>

Updating System Software

The Toyota Audio Multimedia system is capable of over-the-air, over Wi-Fi®, and through USB flash drive updates. To use this function it is necessary to opt-in to the Connected Service Master Data Consent. When the Toyota Audio Multimedia system software is updated, the operating methods of functions may change. Each update will identify the proper updating method to one or all of the following methods:

- Update the software using the Data Communication Module (DCM)
- Update the software using Wi-Fi
- Update the software using a USB flash drive

See the Owner’s Manual for complete details on the updating procedure.

After updating make sure to read the Digital Navigation Owner’s Manual corresponding to the current software version available at <https://www.toyota.com/owners/resources/warranty-owners-manuals>.

Privacy & Protection

To learn about Toyota's Connected Services data collection, use, sharing and retention, visit: www.toyota.com/privacyvts.

- ¹ The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Toyota is under license. A compatible Bluetooth enabled phone must first be paired. Phone performance depends on software, coverage and carrier.
- ² Visit Toyota.com/connected-services or see your local Toyota Dealer for additional details.
- ³ Safety Connect depends on an operative telematics device, a cellular connection, GPS signal strength and other factors outside of Toyota's control, all of which can limit system functionality or availability, including access to response center and emergency support. Stolen vehicle police report required to use Stolen Vehicle Locator. Some features may require the Toyota app. Registration required. Subscription required after trial. Service subject to change at any time without notice. Terms of Use apply. Data charges may apply. Service may vary by vehicle and region. See usage precautions and service limitations in Owner's Manual and Toyota.com/connected-services/ for additional details.
To learn about Toyota's data collection, use, sharing and retention practices, please visit <https://www.toyota.com/privacyvts/>.
- ⁴ Toyota - Remote Connect
Use only if aware of circumstances surrounding vehicle and it is legal and safe to do so (e.g., do not remotely start engine if vehicle is in an enclosed space or vehicle is occupied by a child). Toyota Remote Connect depends on an operative telematics device, a cellular connection, GPS signal strength and other factors outside of Toyota's control, which can limit system functionality and availability. Service may vary by vehicle and region. Registration and Toyota app download required. Subscription required after trial. Terms of Use apply. Data charges may apply. Remote start/stop not available on manual transmission-equipped vehicles. Services subject to change at any time without notice. See usage precautions and service limitations in Toyota Owner's Manual and <https://www.toyota.com/connected-services> for additional details.
To learn about Toyota's data collection, use, sharing and retention practices, please visit <https://www.toyota.com/privacyvts/>.
- ⁵ Service Connect information provided is based on the last time data was collected from the vehicle and is not real time data. Service Connect depends on an operative telematics device, a cellular connection, GPS signal strength and other factors outside of Toyota's control, which can limit functionality or availability. Service may vary by vehicle and region. Registration required. Subscription required after trial. Service subject to change at any time without notice. Terms of Use apply. Data charges may apply. See usage precautions and service limitations in Owner's Manual and Toyota.com/connected-services for additional details.
To learn about Toyota's data collection, use, sharing and retention practices, please visit <https://www.toyota.com/privacyvts/>.
- ⁶ Destination Assist depends on an operative telematics device, a cellular connection, navigation map data and GPS signal strength and other factors outside of Toyota's control, which can limit system ability functionality or availability. Use common sense when relying on this information. Service may vary by vehicle and region. Registration required. Subscription required after trial. Services subject to change at any time without notice. Terms of Use apply. Data charges may apply. See Owner's Manual and Toyota.com/connected-services for additional limitations and details.
To learn about Toyota's data collection, use, sharing and retention practices, please visit <https://www.toyota.com/privacyvts/>.
- ⁷ Wi-Fi Connect is available on select 2018 and newer Toyota vehicles.
Visit Toyota.com/connectedservices for vehicle availability.
- ⁸ SiriusXM® audio services require a subscription sold separately by Sirius XM Radio Inc. To cancel, you must call SiriusXM at 1-866-635-2349. See SiriusXM Customer Agreement for complete terms at www.siriusxm.com.
All fees and programming subject to change. Not all vehicles or devices are capable of receiving all services offered by SiriusXM.
SiriusXM and all related marks and logos are trademarks of Sirius XM Radio Inc.

NOTES



Printed in U.S.A. 7/23
23-MKG-17966



SEQUOIA

Quick Reference Guide 2024



00505QRG24SEQ

toyota.com