



2025

NX350h

OWNER'S MANUAL QUICK GUIDE



Your Lexus Dealer

Your Lexus dealer will provide quality maintenance and any other assistance you may require.

If there is not a Lexus dealer near you, please call the following number:

■ U.S. OWNERS

● In the U.S. mainland or Canada:

Lexus Roadside Assistance

1-800-25-LEXUS or 1-800-255-3987 (Toll-Free)

● In Hawaii:

Servco Automotive Roadside Assistance/Customer Services

1-800-25-LEXUS or 1-800-255-3987 (Toll-Free)

■ CANADIAN OWNERS

● In Canada or the U.S. mainland:

Lexus Roadside Assistance/Customer Service

1-800-26-LEXUS or 1-800-265-3987 (Toll-Free)

Please access our **websites** for further information.

● The U.S. mainland: www.lexus.com

● Hawaii: www.servcolexus.com

● Canada: www.lexus.ca

©2024 TOYOTA MOTOR CORPORATION

All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of Toyota Motor Corporation.

For your information

For your information..... **3**

Pictorial index

Pictorial index **4**

Entering and Exiting

Using the dedicated floor mats correctly..... **11**

Key types..... **12**

Smart access system with push-button start..... **13**

When Driving

Hybrid system indicator **14**

Important points for the hybrid system..... **15**

Starting the hybrid system..... **17**

EV drive mode **20**

Intended use of each shift position **21**

Changing the shift position..... **22**

Changing the shift range **23**

Operations when turning left or right or changing lanes **25**

Parking the vehicle..... **26**

Brake hold system **28**

Functions of the displays **29**

Using the headlights..... **32**

AHS (Adaptive High-beam System)..... **34**

AHB (Automatic High Beam) .. **36**

Ensuring visibility in the rain **38**

Changing the driving characteristics **42**

Driving Comfort

Basic operation of multimedia system..... **43**

Display of drive information **44**

Navigation..... **47**

Connecting a smartphone or communication device..... **50**

Basic operation of audio system..... **60**

Air conditioning controls **66**

Seat heaters..... **69**

Seat ventilators..... **70**

Starting voice control **71**

Connecting a device via the USB port..... **75**

Garage door opener and its performance **76**

Connected Services **83**

Opening and Closing

Locking/unlocking the doors..... **87**

Opening/closing the doors **88**

Opening and closing the windows **89**

Using the moon roof **91**

Back door functions and operation..... **93**

Refueling **96**

What to do if...

Warning lights and indicators..... **97**

Using the mechanical key **103**

If a door cannot be opened using the door opener switch **105**

TABLE OF CONTENTS

Starting the hybrid system
when the electronic key is
not operating normally107

For your information


The "Quick Guide" is not intended as a substitute for your "OWNER'S MANUAL".

We strongly encourage you to review the "OWNER'S MANUAL" and supplementary manuals so you will have a better understanding of your vehicle's capabilities and limitations.

Depending on specifications, the vehicle shown in the illustration may differ from your vehicle in terms of equipment

Pictorial index

Instrument panel

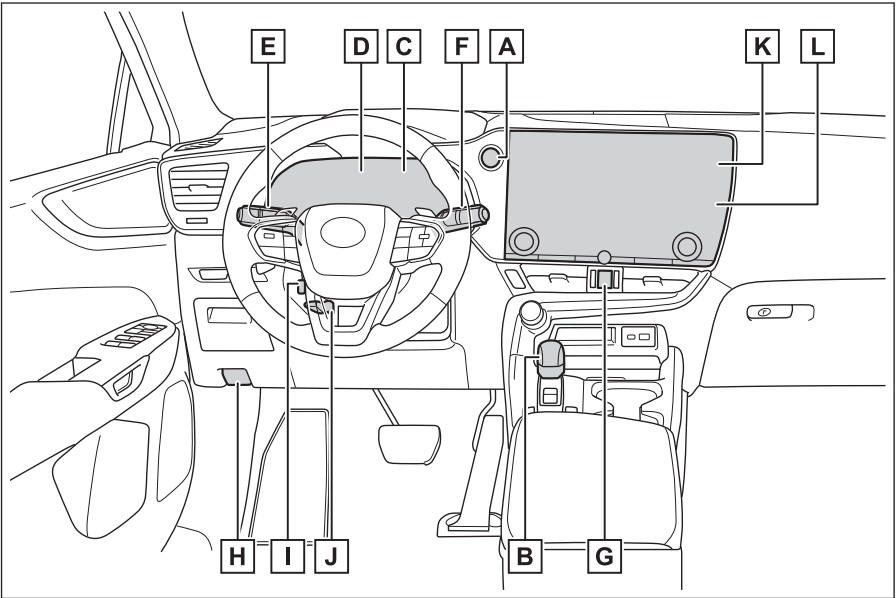


A	Power switch	P.17
	Starting the hybrid system/changing the modes.....	P.17
	Emergency stop of the hybrid system.....	P.18
	When the hybrid system will not start ^{*1}	
	Warning messages ^{*1}	
B	Shift lever	P.21
	Changing the shift position	P.22
	Precautions for towing ^{*1}	
C	Meters^{*1}	
	Reading the meters/adjusting the instrument panel light ^{*1}	
	Warning lights/indicator lights.....	P.97
	When a warning light turns on ^{*1}	
D	Multi-information display	P.29
	Display	P.29

^{*1}: Refer to the "OWNER'S MANUAL".

Energy monitor.....	P.44
When a warning message is displayed* ¹	
E Turn signal lever/Headlight switch.....	P.25,32
Headlights/parking lights/tail lights/license plate lights/daytime running lights	P.32
Front fog lights* ¹	
F Windshield wiper and washer switch.....	P.38,40
Usage	P.38,40
Adding washer fluid* ¹	
Warning messages* ¹	
G Emergency flasher switch*¹	
H Hood lock release lever*¹	
I Tilt and telescopic steering control switch**¹	
Adjustment* ¹	
Driving position memory* ¹	
J Tilt and telescopic steering control lever**¹	
Adjustment* ¹	
K Air conditioning system.....	P.66
Usage	P.66
Rear window defogger	
L Audio system	


*: If equipped

Switches

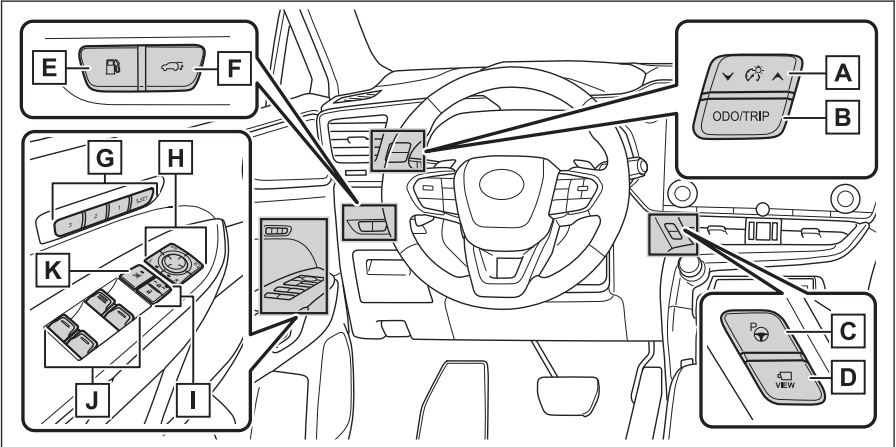

- A** Instrument panel light control switches
- B** ODO/TRIP switch
- C** Advanced Park (parking assist system) main switch ^{**2}
- D** Camera switch ^{**3}
- E** Fuel filler door opener switchP.96
- F** Power back door switch ^{**2}P.94
- G** Driving position memory switches ^{**2}
- H** Outside rear view mirror switches ^{**2}
- I** Door lock switchesP.87
- J** Power window switchesP.89
- K** Window lock switch ^{*2}P.90

^{*2}: Refer to the "OWNER'S MANUAL".
^{*}: If equipped
^{*3}: Refer to "MULTIMEDIA OWNER'S MANUAL".

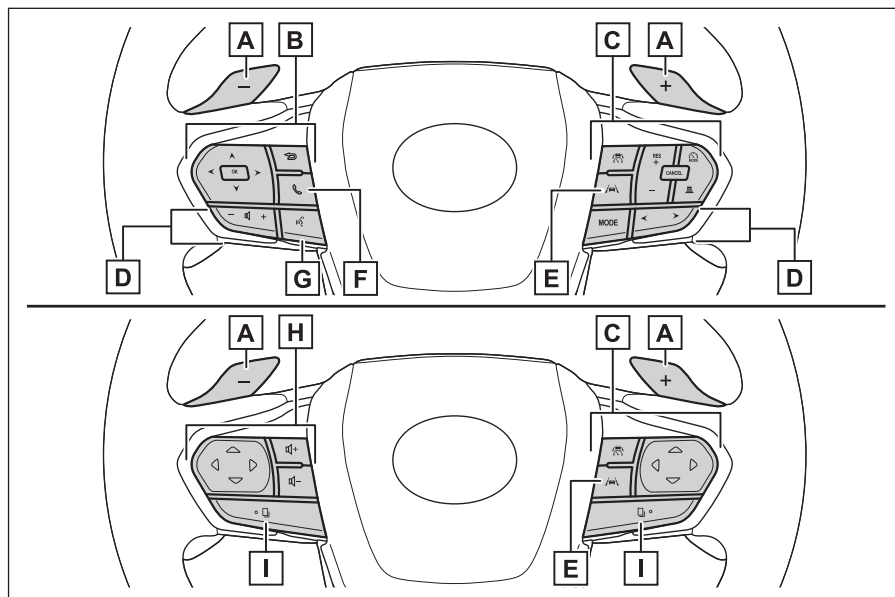


- A** Paddle shift switches [P.23](#)
- B** Meter control switches [P.30](#)
- C** Cruise control switch*²
Dynamic radar cruise control*²
- D** Audio remote control switches*^{4*2}
- E** LTA (Lane Tracing Assist) switch*²
- F** Telephone switch*⁵
- G** Talk switch*⁶
- H** Audio remote control switches/telephone switch/talk switch*⁷ [P.30](#)
- I** Switch function change switch [P.30](#)

*4: Refer to "MULTIMEDIA OWNER'S MANUAL".

*5: Refer to "MULTIMEDIA OWNER'S MANUAL".


*6: Refer to "MULTIMEDIA OWNER'S MANUAL".

*7: Refer to "MULTIMEDIA OWNER'S MANUAL".

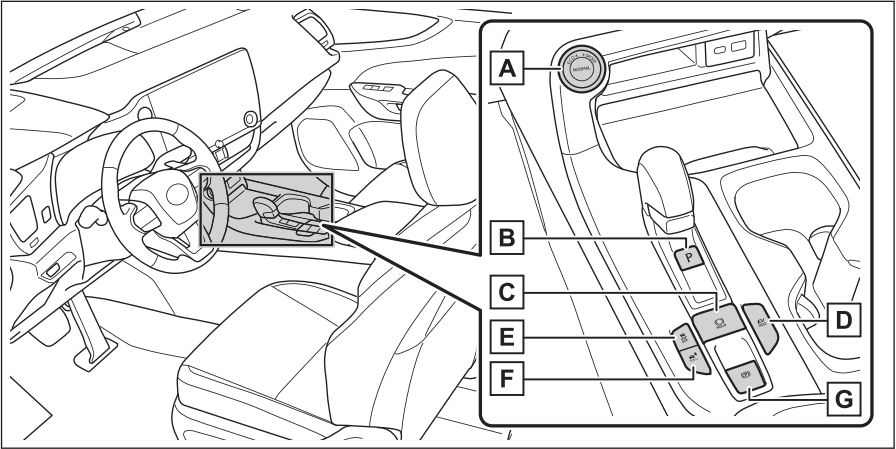

A	Driving mode select switch.....	P.42
B	P position switch *2	P.22
C	Brake hold switch *2	P.28
D	EV drive mode switch *2	P.20
E	VSC OFF switch *2	
F	Trail Mode switch	
G	Parking brake switch	P.22,26,28
	Applying/releasing	P.22,26,28
	Precautions against winter season *2	
	Warning buzzer/message *2	


Interior

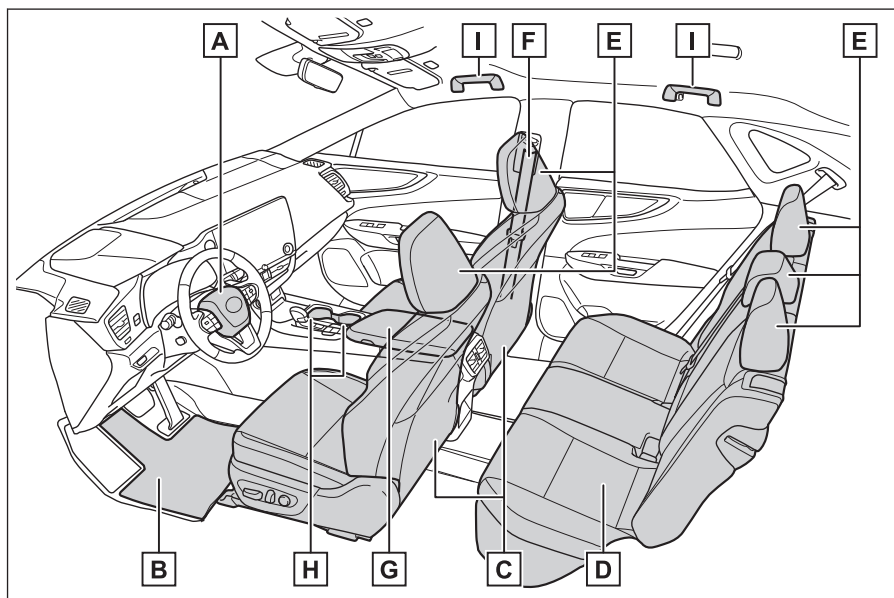

- A SRS airbags*⁸
- B Floor mats [P.11](#)
- C Front seats*⁸
- D Rear seats*⁸
- E Head restraints*⁸
- F Seat belts*⁸
- G Console box*⁸
- H Cup holders*⁸
- I Assist grips*⁸

*⁸: Refer to the "OWNER'S MANUAL".

Ceiling

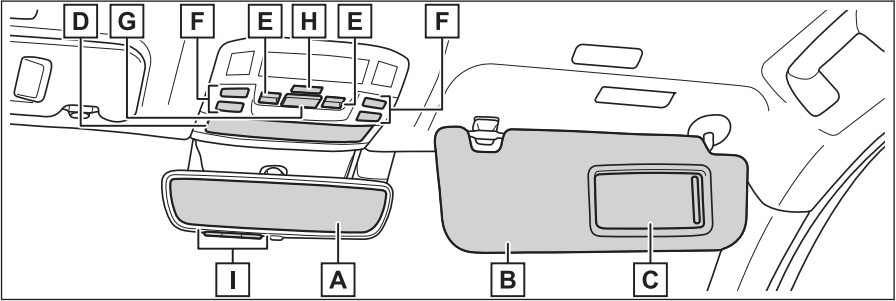

- A

 Inside rear view mirror *⁹
- B

 Sun visors *⁹
- C

 Vanity mirrors *⁹
- D

 Auxiliary box *⁹
- E

 Moon roof switches * /Panoramic moon roof switches **⁹[P.91](#)
- F

 Interior light/Personal lights *⁹
- G

 [SOS] button *[P.83](#)
- H

 Door-linked interior light switch *⁹
- I

 Garage door opener switches.....[P.76](#)

*⁹: Refer to the "OWNER'S MANUAL".


*: If equipped

Using the dedicated floor mats correctly

Use only floor mats designed specifically for vehicles of the same model and model year as your vehicle. Fix them securely in place onto the carpet.

Securing the floor mats


- 1 Insert the retaining hooks (clips) into the floor mat eyelets.

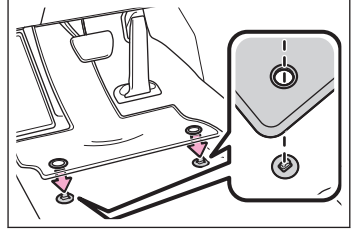

- 2 Turn the upper knob of each retaining hook (clip) to secure the floor mats in place.


Always align the $\triangle$ marks **A**.

The shape of the retaining hooks (clips) may differ from that shown in the illustration.

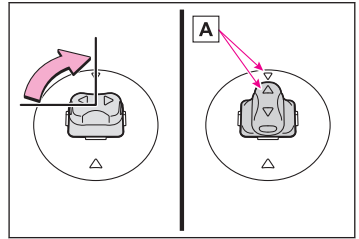

Key types

The following keys are provided with the vehicle.

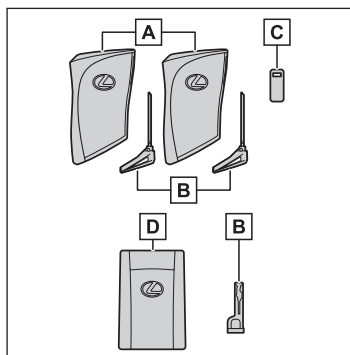

A Electronic keys

- Operating the smart access system with push-button start
- Operating the wireless remote control function

B Mechanical keys

C Key number plate

D Card key (electronic key)*


Operating the smart access system with push-button start

*: If equipped

Smart access system with push-button start

Locking/unlocking the doors using smart access system with push-button start

The driver should always carry an electronic key (or the card key) on their person, for example in their pocket.



- 1 Grip the driver's door handle to unlock the door. Holding the driver's door handle for approximately 2 seconds unlocks all the doors. Grip any passenger door handle to unlock all the doors.*¹

Make sure to touch the sensor on the back of the handle.


The doors cannot be unlocked for 3 seconds after the doors are locked.

- 2 Touch the lock sensor (the indentation on the surface of the door handle) to lock the doors.

Check that the door is securely locked.

Operating the back door using the smart access system with push-button start

Lock/unlock the back door using smart access system with push-button start



- 1 Press 1.


All of the doors will unlock. However, the doors cannot be unlocked within 3 seconds after they were locked.

- 2 Press 2.

All of the doors will lock. Make sure that the doors are securely locked.

*1: The door unlock settings can be changed.

Hybrid system indicator

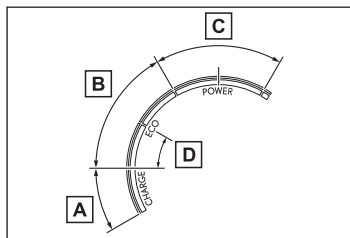

A Charge area

Shows regeneration status.

Regenerated energy will be used to charge the hybrid battery (traction battery).

When used in this manual, "regeneration" refers to the conversion of energy created by the movement of the vehicle into electrical energy.

B Eco area

Shows that the vehicle is being driven in an Eco-friendly manner.

By keeping the indicator needle within Eco area, more Eco-friendly driving can be achieved.

C Power area

Shows that an Eco-friendly driving range is being exceeded (during full power driving etc.)

D Hybrid Eco area

Shows that gasoline engine power is not being used very often.

The gasoline engine will automatically stop and restart under various conditions.

Important points for the hybrid system

Hybrid system features

Your vehicle is a hybrid electric vehicle. It has characteristics different from conventional vehicles. Be sure you are closely familiar with the characteristics of your vehicle, and operate it with care. The hybrid system combines the use of a gasoline engine and an electric motor (traction motor) according to driving conditions, improving fuel efficiency and reducing exhaust emissions. For details, refer to the "OWNER'S MANUAL".

■ When braking (regenerative braking)

The electric motor (traction motor) charges the hybrid battery (traction battery).

INFORMATION

■ Hybrid battery (traction battery) charge

If the shift lever is in N, the hybrid battery (traction battery) will not be charging, even when the engine is running. Therefore, if the vehicle is left with the shift lever in N, the hybrid battery (traction battery) will discharge, and this may result in the vehicle not being able to start.

■ Regenerative braking

- In the following situations, kinetic energy is converted to electric energy and deceleration force can be obtained in conjunction with the recharging of the hybrid battery (traction battery).
 - The accelerator pedal is released while driving with the shift position in D or S.
 - The brake pedal is depressed while driving with the shift position in D or S.

■ Sounds and vibrations specific to a hybrid electric vehicle

Because there is no engine sound or vibration, it is easy to mistake the hybrid electric vehicle for being off when it is actually still running, as indicated by the "READY" indicator being illuminated. For safety, make sure to always shift the shift position to P and apply the parking brake when parked.

The following sounds or vibrations may occur when the hybrid system is operating and are not a malfunction:

- Motor sounds may be heard from the engine compartment.
- Sounds may be heard from the hybrid battery (traction battery) behind the rear seats when the hybrid system starts or stops.
- Click or clunk sounds that may be heard from under of the floor or the rear when the hybrid system is started or stopped, which are sounds of high voltage relay
- Sounds from the hybrid system may be heard when the back door is open.

- Sounds may be heard from the transmission when the gasoline engine starts or stops, when driving at low speeds, or during idling.
- Engine sounds may be heard when accelerating sharply.
- Sounds may be heard due to regenerative braking when the brake pedal is depressed or as the accelerator pedal is released.
- Vibration may be felt when the gasoline engine starts or stops.
- Cooling fan sounds may be heard from the air intake vents under the rear seats.

Starting the hybrid system

Performing the following operations when carrying the electronic key on your person starts the hybrid system or changes power switch modes.

Starting the hybrid system

- 1 Press the parking brake switch to check that the parking brake is set.

The parking brake indicator will come on.

- 2 Firmly depress the brake pedal.



and a message will be displayed on the multi-information display. If it is not displayed, the hybrid system cannot be started.

When the shift position is N, the hybrid system cannot start. Shift the shift position to P when starting the hybrid system.


- 3 Press the power switch shortly and firmly.

When operating the power switch, one short, firm press is enough. It is not necessary to press and hold the switch.

If the "READY" indicator turns on, the hybrid system will operate normally.

Continue depressing the brake pedal until the "READY" indicator is illuminated.

The hybrid system can be started from any power switch mode.




- 4 Check that the "READY" indicator is illuminated.

The vehicle cannot be driven if the "READY" indicator is off.

Changing the power switch mode

Modes can be changed by pressing the power switch with brake pedal released. (The mode changes each time the switch is pressed.)

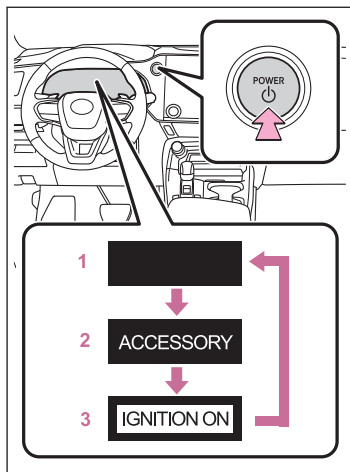

1 OFF*1

The emergency flashers can be used.

2 ACC*2

Some electrical components such as the audio system can be used. "ACCESSORY" will be displayed on the multi-information display.

3 ON

All electrical components can be used.

"IGNITION ON" will be displayed on the multi-information display.


Stopping the vehicle in an emergency

Stop the vehicle using the following procedure only in an emergency, such as if it becomes impossible to stop the vehicle in the normal way:

1 Steadily step on the brake pedal with both feet and firmly depress it.

Do not pump the brake pedal repeatedly as this will increase the effort required to slow the vehicle.

2 Change the shift position to N.



- If the shift position is changed to N:

After slowing down, stop the vehicle in a safe place by the road.

Stop the hybrid system.

- If the shift position cannot be changed to N:

Keep depressing the brake pedal with both feet to reduce vehicle speed as much as possible.

To stop the hybrid system, press and hold the power switch for 2 consecutive seconds or more, or press it briefly 3 times or more in succession.

*1: The power switch will remain ON when a shift position other than P is selected.

*2: ACC mode can be enabled/disabled through a customize setting.

- 3 Stop the vehicle in a safe place by the road.

EV drive mode


Changing to EV drive mode

In EV drive mode, electric power is supplied by the hybrid battery (traction battery), and only the electric motor (traction motor) is used to drive the vehicle. This mode allows you to drive in residential areas early in the morning and late at night, or in indoor parking lots, etc., without concern for noises and gas emissions.

Press the EV drive mode switch.

When EV drive mode is turned on, the EV drive mode indicator will come on.

Pressing the switch when in EV drive mode will return the vehicle to normal driving (using the gasoline engine and electric motor [traction motor]).



Intended use of each shift position


Select the shift position depending on your purpose and situation.

Shift position	Objective or function
P	Parking the vehicle/starting the hybrid system
R	Reversing
N	Neutral (Condition in which the power is not transmitted)
D	Normal driving ⁽¹⁾
S	S mode driving ⁽²⁾

- (1) To improve fuel efficiency and reduce noise, set the shift position in D for normal driving. You can choose gear range suitable for your driving situation by operating the paddle shift switches.
- (2) By selecting shift ranges using S mode, you can control accelerating force and engine braking force.

Changing the shift position

Shift position display and how to change the shift position

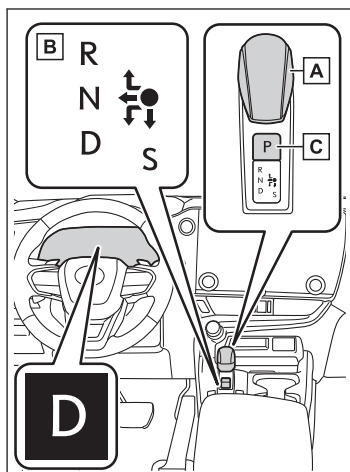

A Shift lever

Operate the shift lever gently and securely in the direction of the arrow on the shift position indicator.

To shift to N, slide the shift lever in the direction of the arrow and hold it.

Release the shift lever after each shifting operation to allow it to return to its regular position (●).

Shifting to S is only possible when the shift position is in D.

When shifting from P to N, D or R, from N, D, S or R to P, from D or M to R, or from R to D, ensure that the brake pedal is being depressed and the vehicle is stationary.

B Shift position indicator

Meter display:

The current shift position is illuminated.

Shift lever display:

The current shift position is illuminated.

When selecting the shift position, make sure that the shift position has been changed to the desired position by checking the shift position indicator provided on the instrument cluster.

C P position switch

Fully stop the vehicle and set the parking brake, and then press the P position switch.

When the shift position is changed to P, the switch illuminates.


Check that the shift position indicator shows P.

Changing the shift range

Selecting shift ranges in the D position

To drive using temporary shift range selection, operate the [-] paddle shift switch with the shift position in D.

The shift range can then be selected by operating the [-] and [+] paddle shift switches.



- 1 Upshift
- 2 Downshift

Selected range between D1 and D5 will be displayed on the multi-information display.

To return to normal D position driving, hold the [+] paddle shift switch for a period of time or operate the [+] paddle shift switch in the D5 range.


● Shift ranges and their functions

- You can choose from 5 levels of engine braking force.
- A lower shift range will provide greater engine braking force than a shift range. As a result, the engine speed will increase.

Selecting shift ranges in the S position

To enter S mode, change the shift position to S.

The shift range can be selected by operating the [-] and [+] paddle shift switches.



- 1 Upshift
- 2 Downshift


The selected shift range, from S1 to S6, will be displayed on the multi-information display.

The initial shift range in S mode is set automatically to S4.

● Shift ranges and their functions

- You can choose from 6 levels of accelerating force and engine braking force.
- A lower shift range will provide greater accelerating force and engine braking force than a higher shift range, and the engine revolutions will also increase.

Operations when turning left or right or changing lanes

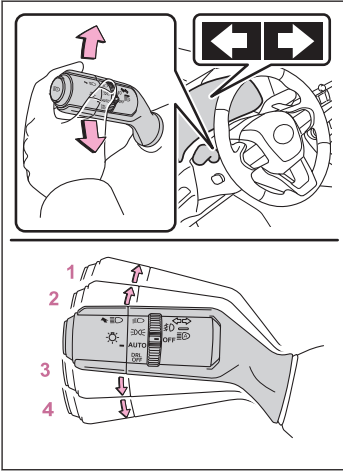

- 1 Move the lever to position 1.
The right turn signal lights will blink.
- 2 Move the lever to position 2 and release it.
The right hand signals will flash 3 times.
- 3 Move the lever to position 3 and release it.
The left hand signals will flash 3 times.
- 4 Move the lever to position 4.
The left turn signal lights will blink.

Parking the vehicle

Parking the vehicle

1 Depress the brake pedal to stop the vehicle completely.

2 If the parking brake is released, set the parking brake.

3 Shift the shift position to P.

Check that the shift position indicator shows P and the parking brake indicator is illuminated.

4 Press the power switch to stop the hybrid system.

5 Slowly release the brake pedal.

6 Lock the door, making sure that you have the electronic key on your person.

Parking brake operation

The parking brake can be set or released automatically (automatic mode) or manually (manual mode). In automatic mode, the parking brake is set or released automatically according to the the shift position operation. Also, even in automatic mode the parking brake can be set or released manually.

Automatic applying/releasing of the parking brake (auto mode)

While the vehicle is stopped, pull and hold the parking brake switch until a buzzer sounds and a message is shown on the multi-information display.


When the automatic mode is turned on, the parking brake operates as follows.

- When the shift position is shifted from P, the parking brake will be released, and the parking brake indicator light will turn off.
- When the shift position is shifted to P, the parking brake will be set, and the parking brake indicator light will turn on.

Operate the shift position and P position switch with the vehicle stopped and the brake pedal depressed.

Manual applying/releasing of the parking brake (manual mode)

The parking brake can be set and released manually.

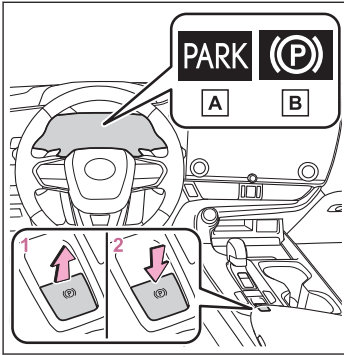

- A Parking brake indicator (U.S.A.)
B Parking brake indicator (Canada)

1 Pull the switch to set the parking brake.

The parking brake indicator light will turn on.

Pull and hold the parking brake switch if an emergency occurs and it is necessary to operate the parking brake while driving.

2 Press the switch to release the parking brake.

- Operate the parking brake switch while depressing the brake pedal.
- Using the parking brake automatic release function, the parking brake can be released by depressing the accelerator pedal.

When using this function, slowly depress the accelerator pedal.

Make sure that the parking brake indicator light turn off.

If the parking brake indicator light flash, operate the switch again.


Brake hold system

Turns the brake hold system on

The brake hold system keeps the brake applied when the shift position is in D, S or N with the system on and the brake pedal has been depressed to stop the vehicle. The system releases the brake when the accelerator pedal is depressed with the shift position in D or S to allow smooth start off.

Turns the brake hold system on

The brake hold standby indicator (green) comes on. While the system is holding the brake, the brake hold operated indicator (yellow) comes on.



Functions of the displays

Multi-information display (vehicles without a head-up display)

A variety of driving-related information can be displayed. Depending on the situation, warning or advice pop-up displays will also be displayed.

■ Items displayed in the content display area

By selecting menu icons on the multi-information display, the following items can be displayed.



Driving information display



Navigation system-linked display*



Audio system-linked display



Driving support system information display



Warning message

If a problem is detected in any of the vehicle's systems, a warning message is shown on the multi-information display.

Multi-information display (vehicles with a head-up display)

A variety of driving-related information can be displayed. Depending on the situation, warning or advice pop-up displays will also be displayed.

■ Items displayed in the content display area

The following items can be displayed.

- Drive information 1
- Drive information 2
- Energy monitor/EV driving ratio

*: If equipped


- Audio system-linked display
- Navigation system-linked display**3
- G-force
- Driving support system information display*3
- Blank (No items)

If a problem is detected in any of the vehicle's systems, a warning message is shown on the multi-information display.

Displayed content

Operating the meters/displays

► Vehicles without a head-up display



A < / > : Select menu icons

^ / v : Change displayed content, scroll up/down the screen and move the cursor up/down

B Enter/Set

C Return to the previous screen


D Start/receive call

Linked with the hands-free system, sending or receiving call is displayed. For details regarding the hands-free system, refer to the "MULTIMEDIA OWNER'S MANUAL".

*: If equipped

*3: Displayed on the head-up display when the display mode is set to display the maximum.

► Vehicles with a head-up display

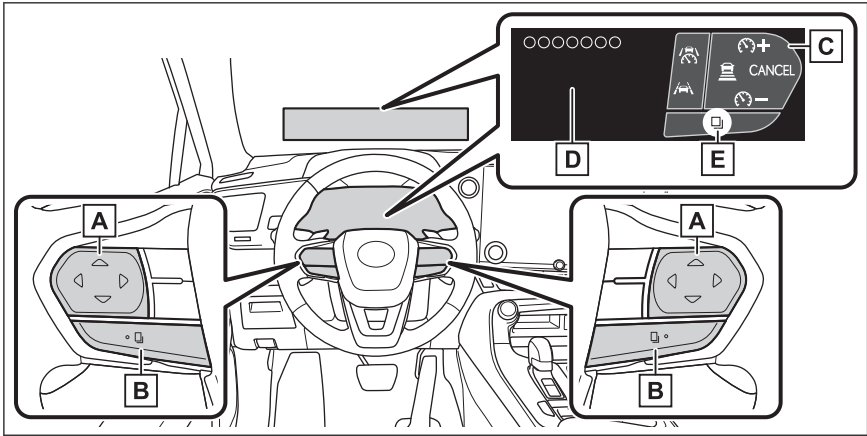

- A** The function of each switch differs depending on the conditions and settings.

When a switch is touched, the function of each switch is displayed. If the head-up display is off, check functions on the multi-information display.

Also, preferred functions for each switch can be set on the center display.

- B** Each time this switch is pressed, the functions will change.

- C** Switch icon display

The icon of each switch will be displayed. The touched switch will be highlighted. (**E**)

- D** Switch function guide display


The function guide for the touched switch will be displayed.

Using the headlights

The headlights can be operated manually or automatically.


Turning the headlights on/off

► Type A

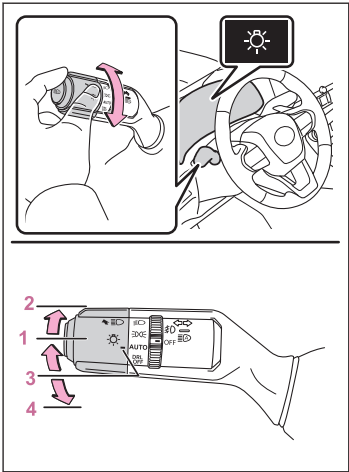


- 1 ☞ The side marker, parking, tail, license plate, instrument panel lights, and daytime running lights turn on.
- 2 ☞ The headlights and all the lights listed above (except daytime running lights) turn on.
- 3 AUTO The headlights, daytime running lights and all the lights listed above turn on and off automatically.
- 4 DRL OFF The daytime running lights turn off.

► Type B

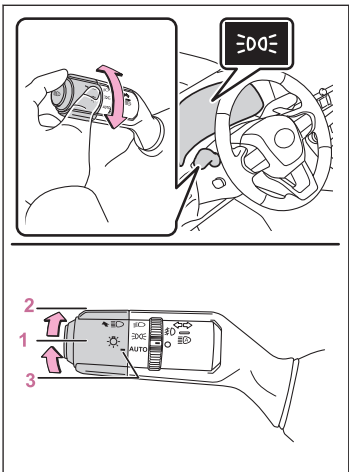

- 1 ☞ The side marker, parking, tail, license plate, instrument panel lights, and daytime running lights turn on.
- 2 ☞ The headlights and all the lights listed above (except daytime running lights) turn on.
- 3 AUTO The headlights, daytime running lights and all the lights listed above turn on and off automatically.

Turning on the high beam headlights



- 1 With the headlights on, push the lever forward.

The high beam headlights will turn on.

Pull the lever to its original position to turn the high beam headlights off.

- 2 Pull the lever rearward and release it.

The high beams will flash once.

The high beam headlights can be illuminated this way even with the headlights off.


AHS (Adaptive High-beam System)*

The Adaptive High-beam System uses a front camera located on the upper portion of the windshield to detect the brightness of the lights of vehicles ahead, streetlights, etc., and automatically controls the light distribution of the headlights.

System controls

- According to the vehicle speed, the brightness and illuminated area of the high beams are adjusted.
- The high beams are illuminated so that the area around a vehicle ahead is shaded. (Shaded high beam)

The shaded high beam helps ensure forward visibility while reducing the dazzling effect on the drivers of vehicles ahead.




- A Area illuminated by the high beams
- B Area illuminated by the low beams

- According to the distance to a preceding vehicle, the illuminated area of the low beams is adjusted.

Using the Adaptive High-beam System


- 1 Press the Adaptive High-beam System switch.

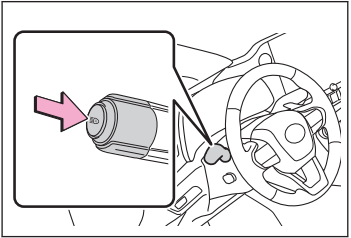

*: If equipped

- 2 Turn the headlight switch lever to the [AUTO] or  position.

When the headlight switch lever is in the low beam position, the AHS system will be enabled and the AHS indicator will illuminate.

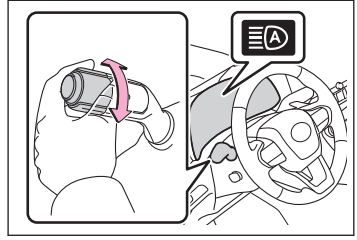


Turning the high beams on/off manually

■ Changing to the high beams

- Push the lever forward.

The AHS indicator will turn off and the high beam indicator will turn on.

Pull the lever to its original position to enable the Adaptive High-beam System again.

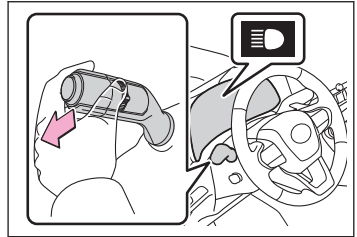


■ Changing to the low beams

- Press the Adaptive High-beam System switch.

The AHS indicator will turn off.

Press the switch to enable the Adaptive High-beam System again.

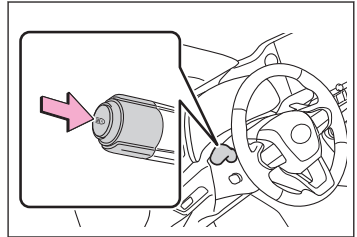


Temporarily changing to the low beams

It is recommended to switch to the low beams when use of the high beams is inappropriate or when the high beams may cause problems or distress to other drivers or pedestrians nearby.

- Pull the lever rearward and then return it to its original position.

The high beams will illuminate while the lever is pulled, however, after the lever is returned to its original position, the low beams will remain on for a certain amount of time. After this, the Adaptive High-beam System will operate.

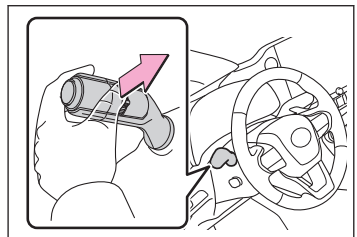


AHB (Automatic High Beam)

The Automatic High Beam uses a front camera located on the upper portion of the windshield to detect the brightness of the lights of vehicles ahead, streetlights, etc., and automatically changes the head lights between the high beams and low beams.


Using the Automatic High Beam system

- 1 Press the Automatic High Beam switch.



- 2 Turn the headlight switch to the [AUTO] or  position.

When the headlight switch lever is in the low beam position, the AHB system will be enabled and the AHB indicator will illuminate.




Turning the high beams on/off manually

■ Changing to the high beams

- Push the lever forward.

The Automatic High Beam indicator will turn off and the high beam indicator will turn on.

Pull the lever to its original position to enable the Automatic High Beam system again.




■ Changing to the low beams

- Press the Automatic High Beam switch.

The Automatic High Beam indicator will turn off.

Press the switch to enable the Automatic High Beam system again.

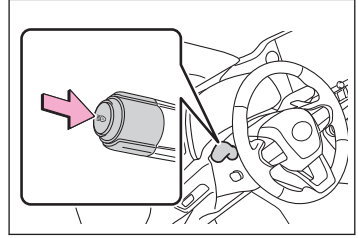


Temporarily changing to the low beams

It is recommended to switch to the low beams when use of the high beams is inappropriate or when the high beams may cause problems or distress to other drivers or pedestrians nearby.

- Pull the lever rearward and then return it to its original position.

The high beams will illuminate while the lever is pulled, however, after the lever is returned to its original position, the low beams will remain on for a certain amount of time. After this, the Automatic High Beam system will operate.

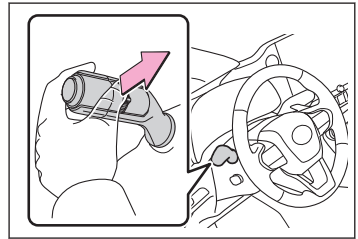


Ensuring visibility in the rain

Using the front wipers


■ Intermittent windshield wipers with interval adjuster*

► Type A

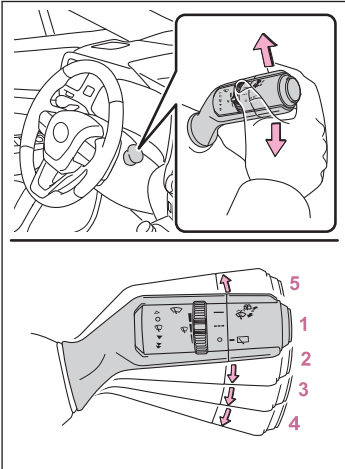

- 1 ○ Off
- 2  Intermittent operation
- 3 ▼ Low speed operation
- 4  High speed operation
- 5 △ Temporary operation

► Type B

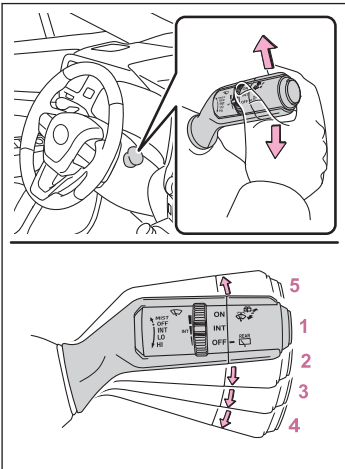


- 1 OFF Off
- 2 INT Intermittent operation
- 3 LO Low speed operation
- 4 HI High speed operation
- 5 MIST Temporary operation

*: If equipped

■ Rain-sensing windshield wipers *

► Type A

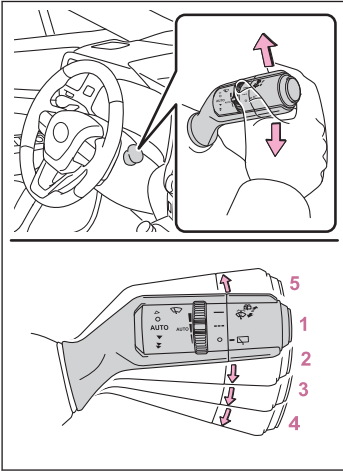


- 1 ○ Off
- 2 AUTO Rain-sensing operation

The wipers operate automatically if the sensor detects rain. The system automatically adjusts the speed of the wipers in accordance with rain volume and vehicle speed.

- 3 ▼ Low speed operation
- 4 ▼ High speed operation
- 5 △ Temporary operation

► Type B

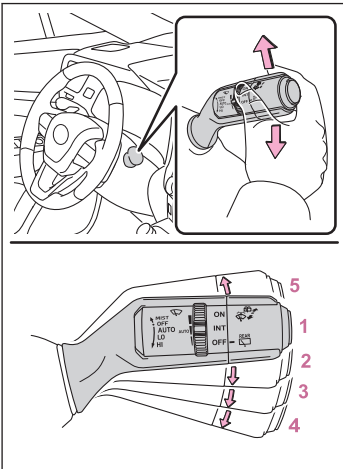

- 1 OFF Off
- 2 AUTO Rain-sensing operation

The wipers operate automatically if the sensor detects rain. The system automatically adjusts the speed of the wipers in accordance with rain volume and vehicle speed.

- 3 LO Low speed operation
- 4 HI High speed operation
- 5 MIST Temporary operation


Using the front washers

 Pull the lever.

The front wipers and washers will operate.


The front wipers will automatically operate a couple of times after the front washers operate.

Vehicles with headlight cleaners: When the headlights are on and the lever is pulled and held, the headlight cleaners will operate once. After this, the headlight cleaners will operate every 5th time the lever is pulled.




Using the rear wipers

► Type A

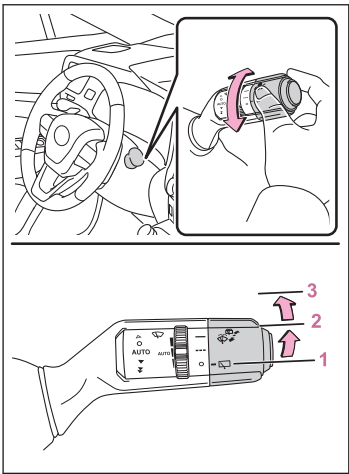

- 1 ○ Off
- 2 --- Intermittent operation
- 3 — Normal operation

► Type B

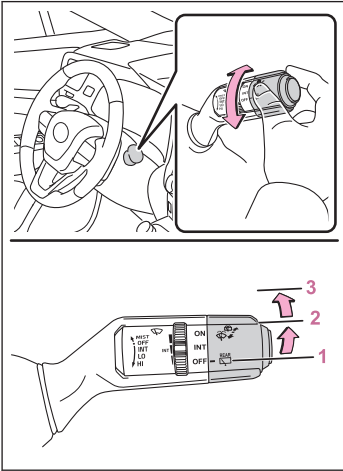

- 1 OFF Off
- 2 INT Intermittent operation
- 3 ON Normal operation

Using the rear washer




Push the lever.

The rear wiper and washer will operate.


The washer will automatically operate and clean the camera for Lexus parking assist monitor.

The rear wiper will automatically operate a couple of times after the rear washer operates.

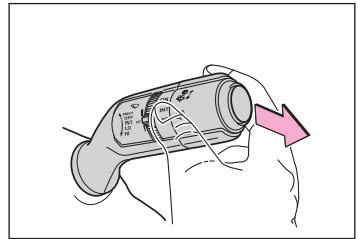

Changing the driving characteristics

Changing the driving mode

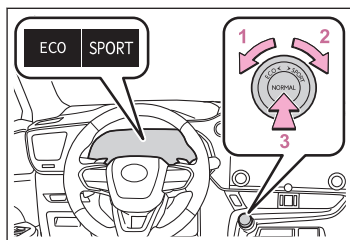

1 Eco mode

When not in Eco mode, turn the driving mode select switch to the left to change the driving mode to Eco mode. The Eco drive mode indicator will be displayed on the multi-information display.

2 Sport mode

When not in Sport mode, turn the driving mode select switch to the right to change the driving mode to Sport mode. The Sport mode indicator will be displayed on the multi-information display.

3 Normal mode

Press the driving mode select switch to change the driving mode to Normal mode when Eco mode or Sport mode is selected.

Basic operation of multimedia system


Map scrolling operation

The map can be moved and a touched point can be set as the center of the map screen.

Flick/drag operation

The map screen can be moved by touching, dragging or flicking it.

Touch [**Recenter**] to return the center of the map to the current position.




Touch and hold operation

If a desired point on the map screen is touched and held, the full route map screen to the selected point will be displayed.

1 Touch and hold the desired point.



2 Full route map screen will be displayed for the selected point.



Display of drive information

Energy monitor/EV driving ratio^{*}

■ Energy monitor


The energy monitor can be used to check the vehicle drive status, hybrid system operation status and energy regeneration status.

The arrows will appear in accordance with the energy flow. When there is no energy flow, arrows will not be displayed.

The color of the arrows will change as follows

- Blue: When the hybrid battery (traction battery) is regenerated or charged.
- Orange^{*1}/Green^{*2}: When the hybrid battery (traction battery) is in use.
- Red^{*1}/Purple^{*2}: When the gasoline engine is in use.

► Multi-information display




The image shows all the arrows as an example. The actual display will vary depending on conditions.

- A Gasoline engine
- B Tires
- C Hybrid battery (traction battery)

This illustration is for explanation only and may differ depending on the specifications of the vehicle.

► Center display



The image shows all the arrows as an example. The actual display will vary depending on conditions.

- A Gasoline engine
- B Front electric motor (traction motor)
- C Hybrid battery (traction battery)
- D Rear electric motor (traction motor)
- E Rear tires
- F Front tires

*: If equipped

*1: Multi-information display

*2: Center display

The displayed energy flow, battery level, etc. will change in response to the current driving conditions.

■ EV driving ratio since starting *

Displays the percentage of EV driving since starting.

It is reset each time the hybrid system stops.


Displaying Energy monitor screen on the center display

- 1 Select  on the main menu.
- 2 Select [Energy flow].

Current fuel consumption/history screen

Fuel consumption information can be displayed on the center display.


■ Current fuel consumption screen



- A Resetting the history data
- B Fuel consumption in the past 15 minutes
- C Current fuel consumption
- D Average vehicle speed since the hybrid system was started.
- E Trip range
- F Elapsed time since the hybrid system was started.

Use the displayed average fuel consumption as a reference. The image is an example only, and may vary slightly from actual conditions.

■ History fuel consumption screen



- A Latest fuel consumption
- B Best recorded fuel consumption
- C Previous fuel consumption record
- D Resetting the history data
- E Updating the latest fuel consumption data

Use the displayed average fuel consumption as a reference. The image is an example only, and may vary slightly from actual conditions.

Displaying fuel consumption/history screen on the center display

- 1 Select  on the main menu.

- 2 Select [Trip information].
- 3 Select [Current] or [History].


Navigation

Destination search screen


Searching for a destination using the keyboard

A destination can be searched for by entering keywords.

- 1 Touch [🗨️] or [🔍] on the map screen.
- 2 Touch [Search navigation].

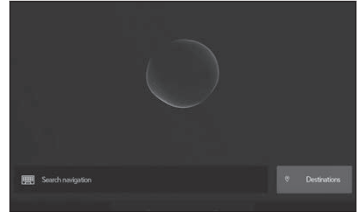

- 3 Enter characters using the keyboard.

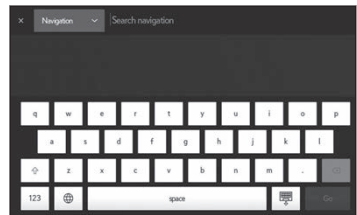


- 4 Touch [Go].
- 5 Touch the desired item from the list.

Searching for a destination by category

A destination can be searched for from a list of categories.

- 1 Touch [🗨️] or [🔍] on the map screen.
- 2 Touch [Destinations].

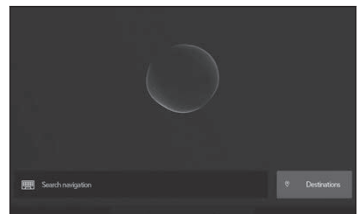

- 3 Touch [Destinations]

4 Touch the desired search method.

[Home] : Touch to set the registered home as the destination.

A point must be registered as home before using this function.*3

[Work] : Touch to set the registered workplace as the destination.

A point must be registered as a workplace before using this function.*1

[Favorites] : Touch to set a registered favorite as the destination.

A point must be registered as a favorite before using this function.

[Recents] : Touch to set a destination from the destination history as the destination.

[Send to car] : Send to car enables customer to send a destination or POI to the vehicle from Lexus app.


[Parking] : Touch to search for a nearby parking lot to set as a destination.

[Fuel / Charging] : Touch to search for a fuel station/charging facility to set as a destination.

[Food] : Touch to search for a restaurant to set as a destination.

[Hospitals] : Touch to search for a hospital to set as a destination.

When setting a business as a destination, if your estimated time of arrival is outside of business hours or near closing time, a notification asking to confirm the destination will be displayed.



5 Touch the desired destination from the list.


Editing the favorites list

The favorites list can be edited.

- 1 Touch [📍] or [🔍] on the map screen.
- 2 Touch [Destinations].
- 3 Touch [Favorites].
- 4 Touch [✏️].

Touch [⊖] to delete a favorite.

The favorites list editing screen will be displayed.



*3: Home and Work must be added via Lexus app.

5 Touch [Save].


Editing the destination history

The destination history can be edited.

- 1 Touch [🎤] or [🔍] on the map screen.
- 2 Touch [Destinations].
- 3 Touch [Recents].
- 4 Touch [✏️].

The destination history editing screen will be displayed.


Touch [⊖] to delete a destination history item.

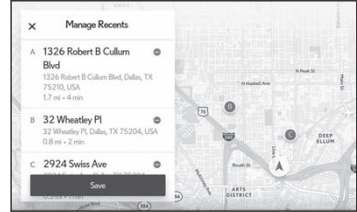

5 Touch [Save].

Searching for a destination using voice control

- 1 Touch [🎤] or [🔍] on the map screen.
- 2 Say the keyword you wish to use for the search.

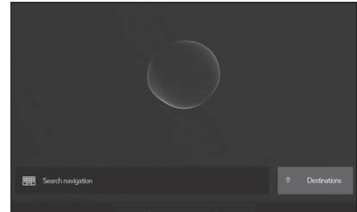

- 3 Touch or use voice command for desired result from list.

Connecting a smartphone or communication device

Registering a Bluetooth® device from the multimedia system

A cellular phone or portable device must be registered in order to use hands-free calling or Bluetooth® audio. Once registration is complete, Bluetooth® will automatically be connected each time the multimedia system is started.

When Apple CarPlay/Android Auto is connected via USB, the device will be registered automatically.

If no Bluetooth® device is connected, the registration screen can also be displayed by pressing and holding the  switch on the steering wheel.


- 1 Touch  from the main menu.
- 2 Touch [Bluetooth & Devices] on the submenu.

If no device is registered, proceed to Procedure 4.

- 3 Touch [Add another device].

While a device is connected to the multimedia system, the confirmation screen for disconnecting the device may be displayed. Disconnect the device to perform registration.

- 4 Touch [Search for devices].



- 5 Touch the device to register from the main area.
 - The Bluetooth® address may be displayed instead of the device name.
 - Certain models of Bluetooth® devices may not be displayed in the device list, unless a certain screen is displayed on the Bluetooth® device. Refer to the Bluetooth® device's instruction manual for details.
- 6 Check that the displayed PIN code matches the PIN code displayed on the Bluetooth® device, and then touch [OK].
 - Some Bluetooth® devices may need to be operated to complete registration.
 - When an HFP supported Bluetooth® device is registered, that device is automatically set as the primary device if the driver does not have a primary device set.

- The Apple CarPlay or Android Auto settings may be displayed. The Apple CarPlay or Android Auto screen will be displayed if the use of either is enabled.
- A message indicating that connection is complete is displayed, and the name of the registered Bluetooth® device is displayed in the submenu.
- If an operation failed screen is displayed, follow the operation instructions on the screen.

Registering from a Bluetooth® device

If the Bluetooth® device cannot be found by searching with the multimedia system, register by searching for the multimedia system from the Bluetooth® device.

- 1 Touch [⚙️] from the main menu.
- 2 Touch [Bluetooth & Devices] on the submenu.


If no device is registered, proceed to Procedure 4.

- 3 Touch [Add another device].

While a device is connected to the multimedia system, the confirmation screen for disconnecting the device may be displayed. Disconnect the device to perform registration.

- 4 Register the multimedia system from the Bluetooth® device to be used.

- Perform the operation according to the operating procedure of the Bluetooth® device.
- Be sure to display this Bluetooth® connection screen before performing registration on the Bluetooth® device.



- 5 Check that the displayed PIN code matches the PIN code displayed on the Bluetooth® device, and then touch [OK].

- Some Bluetooth® devices may need to be operated to complete registration.
- When an HFP supported Bluetooth® device is registered, that device is automatically set as the primary device if the driver does not have a primary device set.
- The Apple CarPlay or Android Auto settings may be displayed. The Apple CarPlay or Android Auto screen will be displayed if the use of either is enabled.
- A message indicating that connection is complete is displayed, and the name of the registered Bluetooth® device is displayed in the submenu.
- If an operation failed screen is displayed, follow the operation instructions on the screen.

Operating with the steering switches (Type A)

Some hands-free call functions can be operated from the steering switches, such as receiving or making calls. The steering switch functions change depending on the status of the multimedia system.

● Operate the switches as necessary.

[+] switch

Increases the ringtone volume or receiver volume.

Press and hold to adjust continuously.

[-] switch

Decreases the ringtone volume or receiver volume.

Press and hold to adjust continuously.


[] switch

Calls can be made using voice command.

To end Intelligent Assistant, press and hold the talk switch.

[] switch

- While a call cannot be made, displays call history screen or phone menu.
- Phone calls can be made when [] is displayed on the phone screen.
- While making a call or during a call, ends the call.
- While receiving a call or during call waiting, answers the call.



Operating with the steering switches (Type B)

Some hands-free call functions can be operated from the steering switches, such as receiving or making calls. The steering switch functions change depending on the status of the multimedia system.

The steering switches are an electrostatic type. A switch functions when the switch is touched. The displayed switch functions and their position will vary depending on the state of the vehicle and multimedia system.

● Operate the switches as necessary.

[] switch

Increases the ringtone volume or receiver volume.

Press and hold to adjust continuously.

[] switch

Decreases the ringtone volume or receiver volume.

Press and hold to adjust continuously.

[] switch

Calls can be made using voice command.

To end Intelligent Assistant, press and hold the talk switch.

[] switch

- While a call cannot be made, displays call history screen or phone menu.

- Phone calls can be made when [] is displayed on the phone screen.


- Change calls/put a call on hold during a call.

- While receiving a call or during call waiting, answers the call.

[] switch

- While making a call or during a call, ends the call.

- Decline an incoming call/call waiting call.

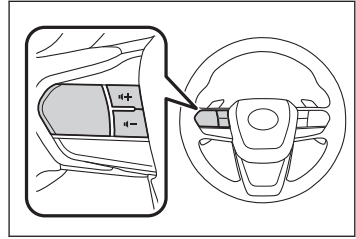

Making calls from call history

Calls can be made to phone numbers that have been recorded in the call history as outgoing or incoming calls.


- 1 Touch [] from the main menu.

- 2 Touch [Recents] on the submenu.

- 3 Select the contact.

For phone numbers that are not registered in the contact, the phone number will be displayed as it is.


- 4 Touch the desired phone number.

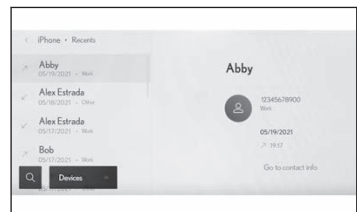

Making calls from the favorites list

Make a call from your favorites list.


- 1 Touch [📞] from the main menu.
- 2 Touch [Favorites] on the submenu.
- 3 Select the person you want to call from your favorites list.
- 4 Touch the desired phone number.



Making calls from contacts

Make a call from the contacts registered on the multimedia system.


- 1 Touch [📞] from the main menu.
- 2 Touch [Contacts] on the submenu.
- 3 Select a contact.
- 4 Touch the desired phone number.



Answering calls

When there is an incoming call, the incoming call sounds and the incoming call screen or incoming call notification is displayed.

- Answer the call by doing one of the following.
 - Touch [📞].
 - Press the [📞] switch on the steering wheel.



Making calls from the message function

Hands-free calls can be made using the message function.

● Touch the blue number to make a call.

Consecutive numbers may be recognized as phone numbers. In addition, some phone numbers, such as phone numbers from other countries, may not be recognized.

Using Apple CarPlay and Android Auto

Using Apple CarPlay with a USB connection

Apple CarPlay can be used by connecting a smartphone to the multimedia system using a data USB cable.

1 Enable Siri from your smartphone's settings menu.

2 Connect the smartphone to the USB port.

- The Apple CarPlay home screen is displayed.
- It may take around 3 to 6 seconds to return to the original screen, depending on the smartphone being connected.
- If guidance is displayed on the smartphone screen, follow those operation instructions.

3 Operate Apple CarPlay.

iPhone applications that support Apple CarPlay can be used by touching the application.



Displays the multimedia system screen.

To display the Apple CarPlay home screen again, touch [] from the main menu.



Switch the screen display.

Touching and holding this will start Siri.



INFORMATION

- While Apple CarPlay is connected, press and hold the [] switch on the steering wheel to start Siri. To cancel Siri, perform a short press of the [] switch on the steering wheel.
- While Apple CarPlay is connected, speaking the Siri wake word will start Siri.

The wake word function of Siri can only be used when the language is set to English. Also, the connected device must have iOS version 14.3 or later.

- If wireless connection is set to be used on the smartphone when registered via USB connection, the device can be wirelessly connected on the next attempt.

Using Apple CarPlay with wireless connection

Apple CarPlay can be connected to the multimedia system wirelessly using vehicle's wireless connection capability.

1 Enable Siri from your smartphone's settings menu.

2 Touch [⚙️] from the main menu.

3 Touch [Bluetooth & Devices] on the submenu.

- The device search screen will be displayed if there is no smartphone registered to the multimedia system. Proceed to Procedure 5.

4 Touch [Add another device].

5 Touch [Search for devices].

6 Select the smartphone to register.

7 Check that the displayed PIN code matches the PIN code displayed on the smartphone, and then touch [OK].

- Perform the operation according to the guidance on the screen.

8 If Apple CarPlay settings are displayed, touch [Yes].

- The Apple CarPlay home screen is displayed.
- It may take around 3 to 6 seconds to return to the original screen, depending on the smartphone being connected.
- If an operation failed screen is displayed, follow the operation instructions on the screen.
- If guidance is displayed on the smartphone screen, follow those operation instructions.

9 Operate Apple CarPlay.

iPhone applications that support Apple CarPlay can be used by touching the application.



Displays the multimedia system screen.

To display the Apple CarPlay home screen again, touch [⏮] from the main menu.





Switch the screen display.

Touching and holding this will start Siri.

INFORMATION

- While Apple CarPlay is connected, press and hold the  switch on the steering wheel to start Siri. To cancel Siri, perform a short press of the  switch on the steering wheel.
- While Apple CarPlay is connected, speaking the Siri wake word will start Siri.
The wake word function of Siri can only be used when the language is set to English. Also, the connected device must have iOS version 14.3 or later.

Using Android Auto with a USB connection

Android Auto can be used by connecting a smartphone to the multimedia system using a data USB cable.

- 1 **Confirm that the Android Auto application is installed on the smartphone to connect.**
- 2 **Connect the smartphone to the USB port.**
 - The Android Auto home screen is displayed.
 - It may take around 3 to 6 seconds to return to the original screen, depending on the smartphone being connected.
 - If guidance is displayed on the smartphone screen, follow those operation instructions.
- 3 **Operate Android Auto.**

Applications that support Android Auto can be used by touching the application.




Displays the multimedia system screen.

To display the Android Auto home screen again, touch  from the main menu.



Start Google Assistant™.



 INFORMATION

While Android Auto is connected, press and hold the  switch on the steering wheel to start Google Assistant™. To cancel Google Assistant™, perform a short press of the  switch on the steering wheel.

Using Android Auto with wireless connection

Android Auto can be connected to the multimedia system wirelessly using vehicle's wireless connection capability.

1 **Confirm that the Android Auto application is installed on the smartphone to connect.**

2 **Touch  from the main menu.**

3 **Touch [Bluetooth & Devices] on the submenu.**

The device search screen will be displayed if there is no smartphone registered to the multimedia system. Proceed to Procedure 5.

4 **Touch [Add another device].**

5 **Touch [Search for devices].**

6 **Select the smartphone to register.**

7 **Check that the displayed PIN code matches the PIN code displayed on the smartphone, and then touch [OK].**

● Perform the operation according to the guidance on the screen.

8 **If Android Auto settings are displayed, touch [Yes].**

● The Android Auto home screen is displayed.

● It may take around 3 to 6 seconds to return to the original screen, depending on the smartphone being connected.

● If an operation failed screen is displayed, follow the operation instructions on the screen.


9 **Operate Android Auto.**

Applications that support Android Auto can be used by touching the application.



Displays the multimedia system screen.

To display the Android Auto home screen again, touch  from the main menu.

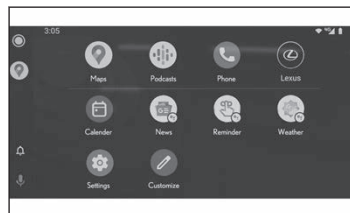



Start Google Assistant™.



INFORMATION


While Android Auto is connected, press and hold the  switch on the steering wheel to start Google Assistant™. To cancel Google Assistant™, perform a short press of the  switch on the steering wheel.

Basic operation of audio system

Changing the audio source

Source can be changed to radio, USB, etc.

- 1 Touch [] from the main menu.
- 2 Touch [Sources].
- 3 Touch the source you wish to select.



Listening to the radio

Switch to your preferred frequency or service and listen to the radio.

- 1 Touch [] from the main menu.
- 2 Touch [Sources].
- 3 Touch [Radio].
- 4 Select the station selection method or service as necessary.

[Favorites] : Select a broadcasting station from those registered as favorites.

[Tune] : Select the broadcasting station by entering a frequency with the numeric keypad.


[FM Radio] : Switches to FM mode. The FM station list, the 3 most recently listened stations, and the receivable FM broadcasting stations are displayed.

[AM Radio] : Switches to AM mode. The AM station list, the 3 most recently listened stations, and the receivable AM broadcasting stations are displayed.

[SiriusXM]^{*4} : Switches to SiriusXM Radio mode.

Displays [For You] and contents/Super Categories/[All channels]/[Listening History].

- 5 Select the broadcasting station from the station list or genre.
- 6 Operate the radio that is being received as necessary.
 - Operating AM/FM from the screen

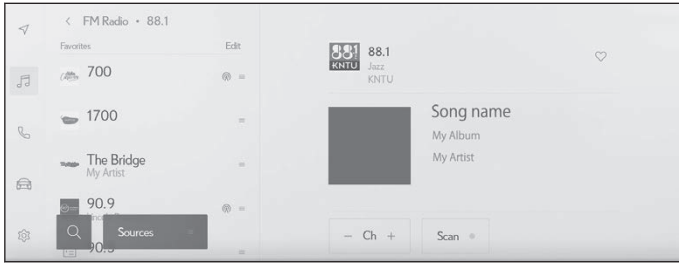

[Ch]: Touch [-] or [+] to search for the receivable broadcasting stations.

Touch and hold to jump to the next frequency with available radio signal. When released, the broadcasting station closest to that position with the best reception sensitivity is selected automatically.


[Scan]: SEEK UP and output the audio of the detected station for 10 sec. This is repeated.

[HD 12]: Displayed when Multicast CH is supported in FM mode. Touch to display the SPS channel list. The mode can be changed to the displayed SPS channel list.

[♥]: Registers the currently received broadcasting station in favorites. When registered, touch to cancel.

Preset buttons of submenu: Receive the registered broadcasting stations.

● Operating SiriusXM Radio from the screen*4

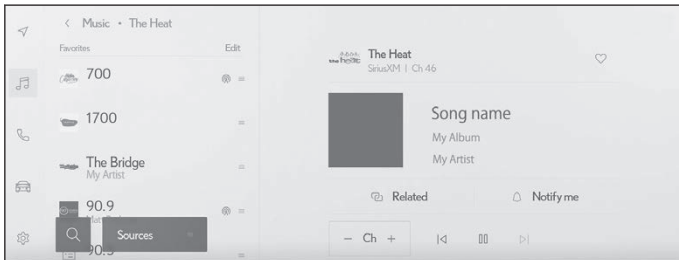

[Ch]: Touch [-] or [+] to search for the receivable channels.

Touch and hold to jump to the next frequency with available radio signal. When released, the current channel is received.

[⏮]/[⏭]: Fast rewind or fast forward the radio cache.

Touch and hold to jump to the start or end of the buffer.

[⏸]: Pause the radio cache.

[▶]: Play the radio cache.

*4: This function is not available in some regions

[**Related**]: Displays content related to the received channel.

[**Notify me**]: Select an artist or song, or both an artist and song, to receive a notification when the corresponding broadcast starts. (When receiving a regular channel)


Select a sports team to receive a notification when the corresponding broadcast starts. (When receiving a sport channel)

[]: Registers the currently received channel in favorites. When registered, touch to cancel.

Preset buttons of submenu: Receive the registered channels.

● Operating with the steering switches

► **Type A**

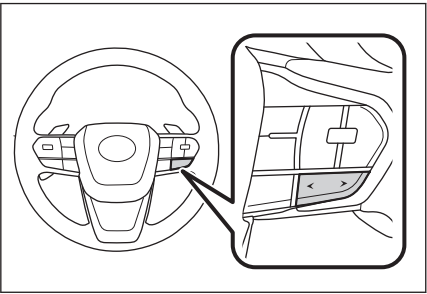

[<]/[>] **switches**

- AM/FM Radio

Switch the frequencies or broadcasting stations registered in the preset buttons in order.


Press and hold to switch frequencies. When released, the broadcasting station closest to that position with the best reception sensitivity is selected automatically.

- SiriusXM Radio

Switch the channels registered in the preset buttons in order.

Press and hold to switch channels. When released, the channel closest to that position with the best reception sensitivity is selected automatically.

► Type B

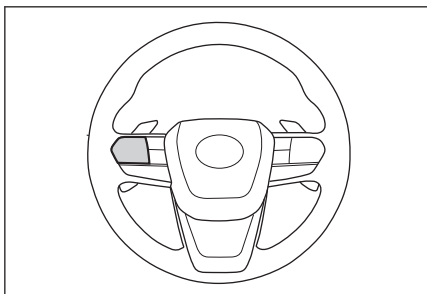

[<]/[>] switches

This switch can be used if set as a favorite steering switch through customization. For the customization procedure, refer to the "OWNER'S MANUAL".

- AM/FM Radio

Switch the frequencies or broadcasting stations registered in the preset buttons in order.

Press and hold to switch frequencies. When released, the broadcasting station closest to that position with the best reception sensitivity is selected automatically.

- SiriusXM Radio

Switch the channels registered in the preset buttons in order.


Press and hold to switch channels. When released, the channel closest to that position with the best reception sensitivity is selected automatically.

Playing iPod/iPhone

Play back music files on an iPod/iPhone connected to the USB port. When an iPod/iPhone is connected, a button with the device's name is displayed on the source selection screen. This may not be displayed for some devices.

Connect an iPod or iPhone.

- 1 Touch [] from the main menu.
- 2 Touch [Sources].
- 3 Touch the device name or [USB].
- 4 Operate an iPod/iPhone that is playing as necessary.
 - Operating from the screen

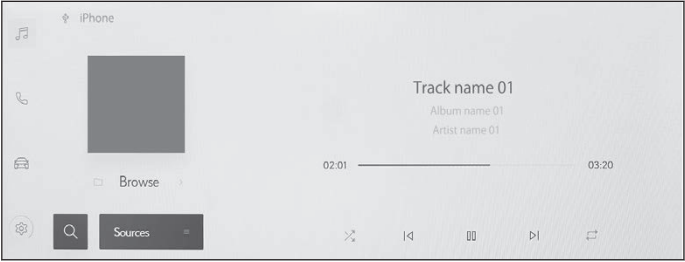

[]: Performs shuffle playback.

Each touch switches the shuffle setting.*5

[]: Plays the currently playing track from the beginning. When at the start of the track, the previous track will play from the beginning.

Touch and hold to fast rewind. Release to start playback from that position.

[]: Pauses playback.

[]: Plays.

[]: Switches the tracks.

Touch and hold to fast forward. Release to start playback from that position.

[]: Performs repeat playback.

Each touch switches the repeat setting.*5


[**Browse**]: Displays the playback mode in the submenu.

Tracks can be selected from a list sorted by artist, album, song, playlist, genre, Podcast, composer, audiobook, or radio.

[**Shuffle play**] is displayed when playing a track selected from the list. Touch this to return to the playback screen and perform shuffle playback.

● Operating with the steering switches

► **Type A**

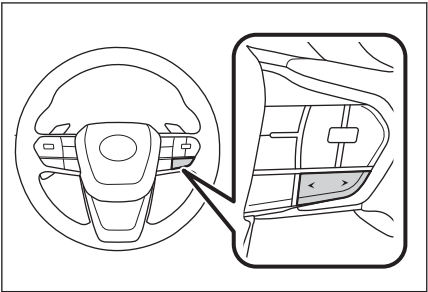


*5: The order in which shuffle or repeat settings switch depends on the connected device.

[<]/[>] switches

Switch the tracks.

Press and hold to fast rewind or fast forward. Release to start playback from that position.

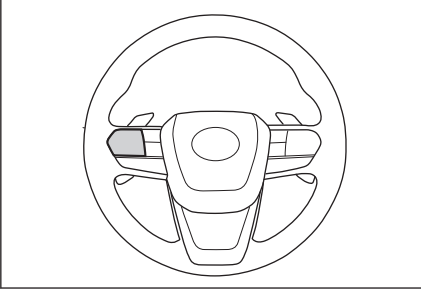► Type B**[<][>] switches**

This switch can be used if set as a favorite steering switch through customization. For the customization procedure, refer to the "OWNER'S MANUAL".


Switch the tracks.

Press and hold to fast rewind or fast forward. Release to start playback from that position.

Air conditioning controls

Option screen switch

► 14-inch center display model

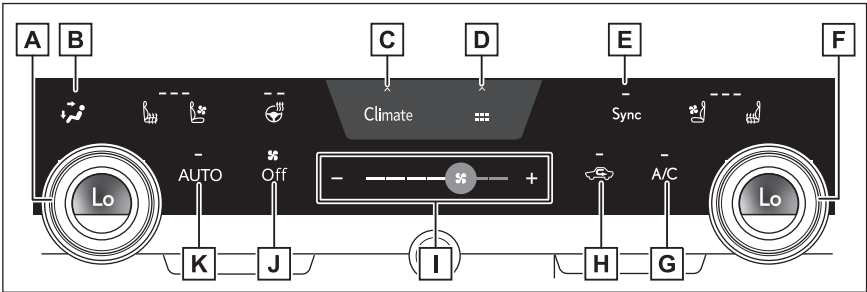


- A Left-hand side temperature control switch
- B Airflow mode control switch
- C Option screen switch
- D Shortcut screen switch

Select to display shortcut icons for various functions.

- E [Sync] switch
- F Right-hand side temperature control switch
- G [A/C] switch
- H Outside/recirculated air mode switch
- I Fan speed control switch
- J [Off] switch
- K [AUTO] switch

► 9.8-inch center display model

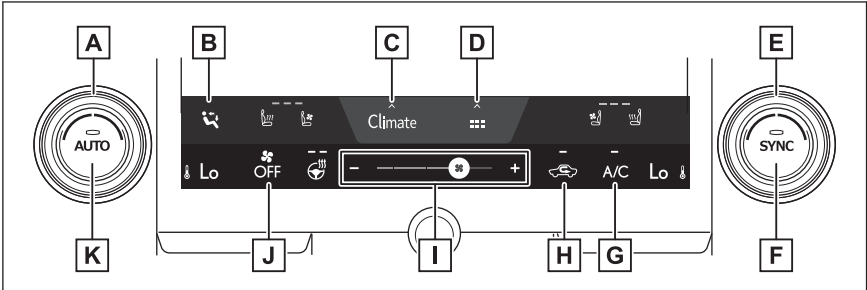

- A Left-hand side temperature control switch
- B Airflow mode control switch
- C Option screen switch

D Shortcut screen switch

Select to display shortcut icons for various functions.

E Right-hand side temperature control switch**F** [SYNC] switch**G** [A/C] switch**H** Outside/recirculated air mode switch**I** Fan speed control switch**J** [OFF] switch**K** [AUTO] switch

Adjusting the temperature

Turn temperature control dial clockwise to increase the temperature and turn the dial counterclockwise to decrease the temperature.

When the indicator on the [Sync] switch is illuminated, the temperature setting for the front passenger's side will match the setting for the driver's side.

When the indicator on the [Sync] switch is off, turning the [Sync] switch on will illuminate the [Sync] switch indicator and the temperature setting for the front passenger's side will become the same as that for the driver's side.

When the front passenger's side temperature adjustment switch is operated, the indicator on the [Sync] switch will turn off and the temperature setting for the front passenger's side will be able to be adjusted.

When the indicator on the [A/C] switch is off, the blower and heater can be used.

Setting the fan speed

To increase the fan speed, select the [+] fan speed adjustment switch or slide the icon of the fan speed adjustment switch right. To decrease the fan speed, select the [-] fan speed adjustment switch or slide the icon of the fan speed adjustment switch left.

Select the [Off] switch to turn the fan off.

The fan can also be stopped by touching and holding the [-] fan speed adjustment switch or sliding the icon of the fan speed adjustment switch to the leftmost position and holding it.

Changing the air flow mode

Select the airflow mode control switch

The airflow mode changes each time the switch is selected.

The air outlets and air volume changes according to the selected air flow mode.



: Air flows to the upper body



: Air flows to the upper body and feet



: Air flows to the feet



: Air flows to the feet and the windshield defogger operates

Seat heaters

Turn the front seat heaters ON/OFF

Select  or  on the center display.

Each time the switch is selected, the operation condition changes as follows.

AUTO → Hi (3 segments lit) → Mid (2 segments lit) → Lo (1 segment lit) → Off

Vehicles with seat ventilators: The level indicator (yellow) lights up during operation.

The level indicator (red) lights up during operation. [AUTO] indicator lights up during automatic operation.


Turns the rear seat heaters on/off*

Press the switch.

Each time the switch is pressed, the operation condition changes as follows.

Hi (3 segments lit) → Mid (2 segments lit) → Lo (1 segment lit) → Off

The level indicators (yellow) light up during operation.

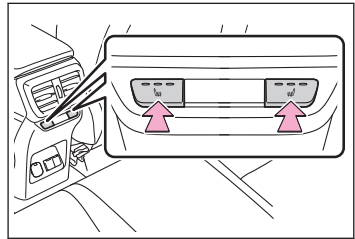

*: If equipped

Seat ventilators *

Using fans inside the seats, improved ventilation can be provided at the surface of the seats.

Turn the seat ventilators (front) ON/OFF

Select  or  on the center display.

Each time the switch is selected, the operation condition changes as follows.

Hi (3 segments lit) → Mid (2 segments lit) → Lo (1 segment lit) → Off

The level indicator (blue) lights up during operation. [AUTO] indicator lights up during automatic operation.

*: If equipped


Starting voice control

Voice control can be started by any of the following operations:


■ Press the talk switch

Press  switch (talk switch) on the steering wheel.

► Type A

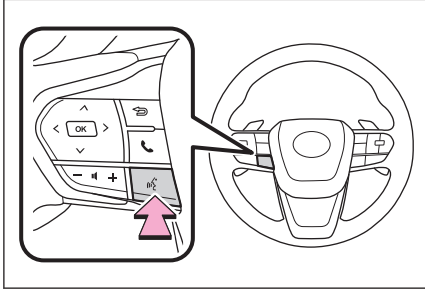

► Type B

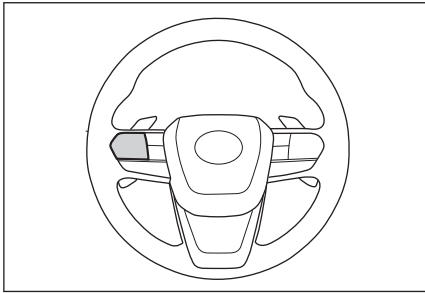


The position of each switch function will vary depending on the state of the vehicle and multimedia system.

■ Say the wake word

Say "Hey Lexus".

- The wake word can be turned on or off.
- The wake word can be used and then immediately issue a voice command.

Example: "Hey Lexus, take me to an Italian restaurant."

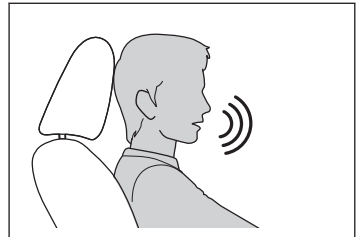

■ Touch the voice search button

Touch [🔊] or [🔍] on the screen.



Function list

The following tables list frequently used commands for each function category.

- The functions available may vary according to the system installed.
- Items with "Subscription" will require Intelligent Assistant functionality.

■ Common

Action	Example voice command	Subscription
Shows list of general commands	"Help"	No
Stops the current conversation and re-starts at the beginning	"Start over"	No
Cancels the Intelligent Assistant system	"Cancel"	No

■ Navigation

Intelligent Assistant system enables navigation voice search. This allows you with variety of features such as searching a point of interest (POI), navigate to an address as well as discovering new POIs.

Function	Example voice command	Subscription
Destination search	"Take me to <location category/business name>" "Take me to an Italian restaurant" "Take me to <address>" "Take me to 6565 Headquarters drive Plano TX" "Take me home" "Take me to work"	Yes
Map control	"Map zoom in" "Map zoom out"	Yes

Function	Example voice command	Subscription
Route information	"Cancel trip"	Yes
Telematics	"Call Destination Assist"	No

■ Multimedia control

Allows you to engage in a dialog with the Intelligent Assistant to complete various multimedia tasks via voice input.

Function	Example voice command	Subscription
Radio	"Tune to 99.5 FM" "Tune to Rock on FM" "Tune to channel 2 on SiriusXM"	No
Media	"Mute audio" "Next" "Previous"	No
Media Streaming	"Play <artist/album/song/genre/playlist>" "Play Frank Sinatra"	Yes

■ Hands-free phone operation

Allows you to engage in a dialog with the Intelligent Assistant to complete various tasks via voice input, such as making a phone call to a contact, or calling destination assist.

Function	Example voice command	Subscription
Phone call	"Call John Smith" "Dial 0123456789" "Call back" "Redial"	No
Message	"Send message to John Smith" "Read message"	No

■ Screen display switching

Allows you to easily change to various function screen by voice.

Function	Example voice command	Subscription
Navigation	"Show map"	Yes
Phone	"Show recent calls"	No

Function	Example voice command	Subscription
Multimedia	"Show the FM station list"	No
Settings	"Show display settings"	No

■ **Vehicle device control**

Allows you to easily change a vehicle setting or activate a function by voice.

Function	Example voice command	Subscription
Climate	"Turn on the air conditioner" "Set the temperature to 70 degrees" "Turn the fan speed up"	No

■ **Notifications**

Offers notifications based on user preferences, vehicle geolocation and learned behavior. Each service can be set to On/Off from the Lexus app.


Function	Detail	Subscription
POI suggestion (Navigation)	● A POI shared through a smartphone app ● Parking suggestions near destination	Yes
Low fuel (Navigation)	Automatically notifies user of low fuel level. If applicable, provides POI list nearby (ahead) or along route and allows user to select and navigate by touch.	Yes

Connecting a device via the USB port

Connect a device such as smartphone or portable player.

- **Connect the USB cable to the port.**

When connecting a USB flash drive, connect it directly to the USB port.

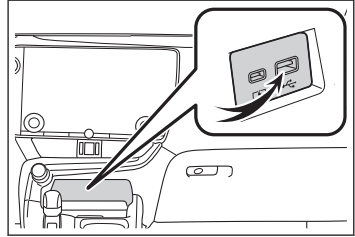

Garage door opener and its performance

The garage door opener can be programmed using the HomeLink® to operate garage doors, gates, entry doors, door locks, home lighting systems, security systems, and other devices.

 **INFORMATION**

■ HomeLink® programming procedure

The programming procedures can also be found at the following URL.

Website: www.homelink.com/lexus

For support, contact customer support at the following.


Help Line: 1-800-355-3515



System components


The HomeLink® wireless control system in your vehicle has 3 buttons which can be programmed to operate 3 different devices.

► Vehicles with auto anti-glare inside rear view mirror



- A HomeLink® indicator light
Illuminates while HomeLink® is operating.
- B Garage door operation indicators
- C HomeLink® icon
- D Buttons

► Vehicles with Digital Rearview Mirror



- A HomeLink® logo
Appears while HomeLink® is operating. When the menu button is pressed, the logo disappears even while the HomeLink® is operating.
- B Garage door operation indicators
- C HomeLink® indicator lights
Illuminates above each button selected.
- D Buttons

Program the HomeLink®

Before programming the HomeLink®, perform the following:

- During programming, it is possible that garage doors, gates, or other devices may operate. For this reason, make sure that people and objects are clear of the garage door or other devices to prevent injury or other potential harm.
- It is recommended that a new battery be placed in the remote control transmitter for more accurate programming.

The battery side of the transmitter must be pointed away from the HomeLink® buttons.


- Garage door opener motors manufactured after 1995 may be equipped with rolling code protection. If this is the case, you may need a stepladder or other sturdy, safe device to reach the “learn” or “smart” button on the garage door opener motor.

Steps 1 through 3 must be performed within 60 seconds. Otherwise the indicator light will stop flashing and programming will not be able to be completed.


- 1 Press and release the HomeLink® button you want to program and check that the HomeLink® indicator light flashes orange.
- 2 Point the remote control transmitter for the device at the rear view mirror, 1 to 3 in. (25 to 75 mm) from the HomeLink® buttons.

Keep the HomeLink® indicator light in view while programming.

► Vehicles with auto anti-glare inside rear view mirror

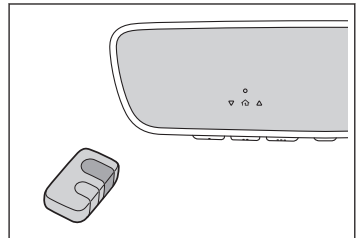


► Vehicles with Digital Rearview Mirror

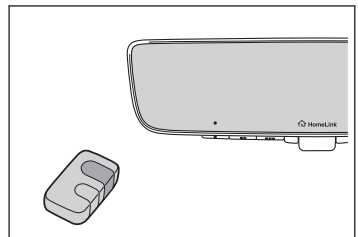


3 Program a device.

► Vehicles with auto anti-glare inside rear view mirror



► Vehicles with Digital Rearview Mirror



- Programming a device other than an entry gate (for U.S.A. owners):

Press and hold the remote control transmitter button until the HomeLink[®] indicator light changes from slowly flashing orange to rapidly flashing green (rolling code) or continuously lit green (fixed code), then release the button.

- Programming an entry gate (for U.S.A. owners)/Programming a device in the Canadian market:

Press and release the remote control transmitter button at 2 second intervals, repeatedly, until the HomeLink[®] indicator light changes from slowly flashing (orange) to rapidly flashing (green) (rolling code) or continuously lit (green) (fixed code).

4 Test the HomeLink[®] operation by pressing the newly programmed button and observing the indicator light:

- HomeLink[®] indicator light illuminates: Programming of a fixed code device has completed. The garage door or other device should operate when a HomeLink[®] button is pressed and released.
- HomeLink[®] indicator light flashes rapidly: The garage door opener motor or other device is equipped with a rolling code. To complete programming, firmly press and hold the HomeLink[®] button for 2 seconds then release it.
- If the garage door or other device does not operate, proceed to [Programming a rolling code system](#)(→ P.79).


- 5 Repeat the steps above to program another device for any of the remaining HomeLink® buttons.

Programming a rolling code system

Two or more people may be necessary to complete rolling code programming.


- 1 **Locate the “Learn” or “Smart” button on the garage door opener motor in the garage.**

This button can usually be found where the hanging antenna wire is attached to the unit. The name and color of the button may vary by manufacturer. Refer to the owner's manual supplied with the garage door opener motor for details.

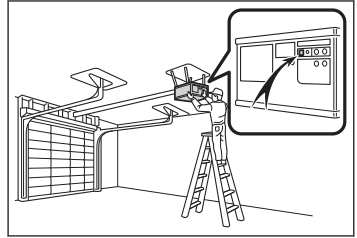

- 2 **Press and release the “Learn” or “Smart” button.**


Perform 3 within 30 seconds after performing 2.

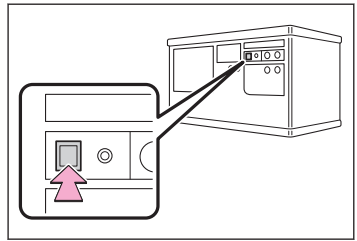


- 3 **Press and hold the desired HomeLink® button (inside the vehicle) for 2 seconds and release it. Repeat this sequence (press/hold/release) up to 3 times to complete programming.**

If the garage door opener motor operates when the HomeLink® button is pressed, the garage door opener motor recognizes the HomeLink® signal.

► Vehicles with auto anti-glare inside rear view mirror

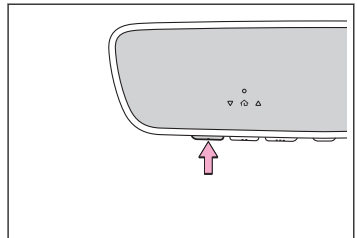

► Vehicles with Digital Rearview Mirror

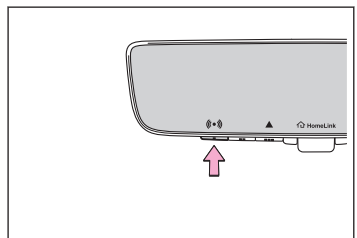

2-way communication with a garage door and its performance

When enabled, 2-way communication allows you to check the status of the opening and closing of a garage door through indicators in your vehicle.

2-way communication is only available if the garage door opener motor used is a compatible device.

To check device compatibility, refer to www.HomeLink.com.

Enable 2-way communication with a garage door

- 1 Within 5 seconds after programming the garage door opener has been completed, if the garage door opener motor is trained to HomeLink®, both garage door operation indicators will flash rapidly green and the light on the garage door opener motor will blink twice, indicating that 2-way communication is enabled.

If the indicators do not flash, perform 2 and 3 within the first 10 presses of the HomeLink® button after programming has been completed.


- 2 Press a programmed HomeLink® button to operate a garage door.
- 3 Within 1 minute of pressing the HomeLink® button, after the garage door operation has stopped, press the “Learn” or “Smart” button on the garage door opener motor.

Within 5 seconds of the establishment of 2-way communication, both garage door operation indicators will flash rapidly in green. Additionally, the light on the garage door opener motor will blink twice, indicating that 2-way communication is enabled.


Operate the HomeLink®

This function is only available if the garage door opener motor used is a compatible device. To check device compatibility, refer to www.HomeLink.com.

► **Vehicles with auto anti-glare inside rear view mirror**



► Vehicles with Digital Rearview Mirror



- A Opening
B Closing

Press the appropriate HomeLink® button.

The HomeLink® indicator light will turn on. The status of the opening and closing of a garage door is shown by the indicators as follows.

- Orange (flashing): Currently opening/closing
- Green: Opening/closing has completed
- Red (flashing): Feedback signals cannot be received

Reprogram the HomeLink®

When the following procedure is performed, buttons which already have devices registered to them can be overwritten:

- 1 Press and hold the desired HomeLink® button.
- 2 When the HomeLink® indicator starts flashing orange, release the HomeLink® button.
- 3 Press and release the HomeLink® button you want to program and check that the HomeLink® indicator light flashes orange.

It takes 20 seconds for the HomeLink® indicator to start flashing.


Erase the entire HomeLink® memory

When selling your vehicle, be sure to erase the registered codes from the HomeLink® memory.


Press and hold the 2 outer HomeLink® buttons for 10 seconds. Check that the HomeLink® indicator light changes from continuously lit in orange to rapidly flashing in green.

All codes registered to memory will be erased.

► Vehicles with auto anti-glare inside rear view mirror

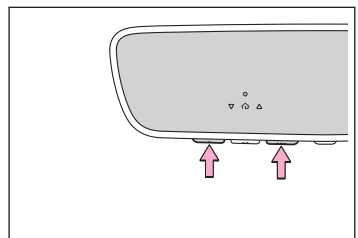

► Vehicles with Digital Rear-view Mirror




Connected Services

Safety Connect*

Safety Connect is a subscription-based telematics service that uses Global Positioning System (GPS) data and embedded cellular technology to provide safety and security features to subscribers. Safety Connect is supported by Lexus' designated response center, which operates 24 hours per day, 7 days per week. Safety Connect service is available by subscription on select, telematics hardware-equipped vehicles. By using the Safety Connect service, you are agreeing to be bound by the Telematics Subscription Service Agreement and its Terms and Conditions, as in effect and amended from time to time, a current copy of which is available at Lexus.com. All use of the Safety Connect service is subject to such then-applicable Terms and Conditions.

System components

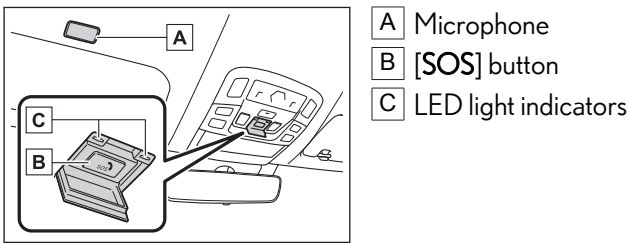

Services

Subscribers have the following Safety Connect services available:

- Automatic Collision Notification*⁶
Helps drivers receive necessary response from emergency service providers. → P.84
- Stolen Vehicle Location
Helps drivers in the event of vehicle theft. → P.84
- Emergency Assistance Button ([SOS])
Connects drivers to response-center support. → P.84
- Enhanced Roadside Assistance
Provides drivers various on-road assistance. → P.84

*: If equipped

*6: U.S. Patent No. 7,508,298 B2

Subscription

After you have signed the Telematics Subscription Service Agreement and are enrolled, you can begin receiving services.

A variety of subscription terms is available for purchase. Contact your Lexus dealer, call the following or push the [SOS] button in your vehicle for further subscription details.

- The United States
1-800-25-LEXUS (1-800-255-3987)
- Canada
1-800-26-LEXUS (1-800-265-3987)
- Puerto Rico
1-877-539-8777

Safety Connect LED light Indicators

When the power switch is turned to ON, the red indicator light comes on for 2 seconds then turns off. Afterward, the green indicator light comes on, indicating that the service is active. The following indicator light patterns indicate specific system usage conditions:

- Green indicator light on = Active service
- Green indicator light flashing = Safety Connect call in process
- Red indicator light (except at vehicle start-up) = System malfunction (contact your Lexus dealer)
- No indicator light (off) = Safety Connect service not active

Safety Connect services

■ Automatic Collision Notification

In case of either airbag deployment or severe rear-end collision, the system is designed to automatically call the response center. The responding agent receives the vehicle's location and attempts to speak with the vehicle occupants to assess the level of emergency. If the occupants are unable to communicate, the agent automatically treats the call as an emergency, contacts the nearest emergency services provider to describe the situation, and requests that assistance be sent to the location.

■ Stolen Vehicle Location

If your vehicle is stolen, Safety Connect can work with local authorities to assist them in locating and recovering the vehicle. After filing a police report, call the

Safety Connect response center at 1-800-25-LEXUS (1-800-255-3987) in the United States, 1-877-539-8777 in Puerto Rico or 1-800-265-3987 in Canada, and follow the prompts for Safety Connect to initiate this service.

In addition to assisting law enforcement with recovery of a stolen vehicle, Safety-Connect-equipped vehicle location data may, under certain circumstances, be shared with third parties to locate your vehicle. Further information is available at Lexus.com.

■ Emergency Assistance Button ([SOS])

In the event of an emergency on the road, push the [SOS] button to reach the Safety Connect response center. The answering agent will determine your vehicle's location, assess the emergency, and dispatch the necessary assistance required.

If you accidentally press the [SOS] button, tell the response-center agent that you are not experiencing an emergency.

■ Enhanced Roadside Assistance

Enhanced Roadside Assistance adds GPS data to the already included warranty-based Lexus roadside service.

Subscribers can press the [SOS] button to reach a Safety Connect response-center agent, who can help with a wide range of needs, such as: towing, flat tire, fuel delivery, etc. For a description of the Roadside Assistance services and their limitations, please see the Safety Connect Terms and Conditions, which are available at Lexus.com.

Safety information for Safety Connect

Important! Read this information about exposure to radio frequency signals before using Safety Connect; The Safety Connect system installed in your vehicle is a low-power radio transmitter and receiver. It receives and also sends out radio frequency (RF) signals. In August 1996, the Federal Communications Commission (FCC) adopted RF exposure guidelines with safety levels for mobile wireless phones. Those guidelines are consistent with the safety standards previously set by the following U.S. and international standards bodies.

- ANSI (American National Standards Institute) C95.1 [1992]
- NCRP (National Council on Radiation Protection and Measurement) Report 86 [1986]
- ICNIRP (International Commission on Non-Ionizing Radiation Protection) [1996]

Those standards were based on comprehensive and periodic evaluations of the relevant scientific literature. Over 120 scientists, engineers, and physicians from

universities, and government health agencies and industries reviewed the available body of research to develop the ANSI Standard (C95.1).

The design of Safety Connect complies with the FCC guidelines in addition to those standards.

Remote Connect*

Remote Connect is a smartphone application that lets you view and remotely control certain aspects of your vehicle. For details about the functions and services of this application, refer to <http://www.lexus.com/enform/>. Function of the Remote Connect is achieved by using an embedded cellular device in the vehicle (DCM: Data Communication Module).

Remote Connect subscription

After you sign the Telematics Subscription Service Agreement, download the Lexus App from your smartphone's app store, and register within the app (or enroll and complete registration at the dealer), you can begin using these services. A variety of subscription terms are available. Contact your Lexus dealer, or call 1-800-25-LEXUS (1-800-255-3987) for further subscription details.

Service Connect*

Service Connect uses embedded telematics hardware to collect and transmit vehicle data that allows Lexus to provide:

- Vehicle Health Report (VHR) (Safety Recalls, Service Campaigns, Current Vehicle Alerts, Required Maintenance, and Vehicle Condition Status)
- Maintenance Notifications
- Vehicle Alert Notifications


For details about this service and how to register, refer to <http://www.lexus.com/enform/>. The Service Connect is achieved by using a Data Communication Module (DCM) built in the vehicle.

*: If equipped

Locking/unlocking the doors

Operations using the wireless remote control

Lock/unlock the doors using wireless remote control




- 1 Locks all the doors
- 2 Unlocks all the doors

Using the door lock switches

The vehicle can be locked and unlocked using the entry function, wireless remote control or door lock switches.

Locking/unlocking the doors with the door lock switches




- 1 Press the  switch.
All of the doors will lock.
The indicator **A** comes on.
- 2 Press the  switch.
All of the doors will unlock.
The indicator **A** turns off.

Opening/closing the doors

Opening the doors

► Outside the vehicle

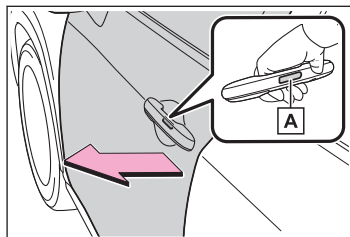

When the doors are locked:

While carrying an electronic key, press the door opener switch **A** of the door handle and open the door.


Make sure to securely press the door opener switch **A** on the inner side of the door handle with the electronic key within the detection area.

When the doors are unlocked:

Press the door opener switch **A** of the door handle to open the door.

Make sure to securely press the door opener switch **A** on the inner side of the door handle.

► Inside the vehicle

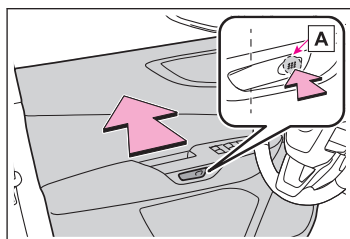

Driver's door:

Even if the door is locked, pressing the front side of the door opener switch **A** will open the door.

The door will unlock and the door lock indicator will turn off.

Passenger doors:


Press the door lock switch to unlock the door, and then pressing the front side of the door opener

switch **A** to open the door.

The door will unlock and the door lock indicator will turn off.

Preventing the rear doors from being opened from the inside of the vehicle (child-protector lock)

The door cannot be opened from inside the vehicle when the lock is set.

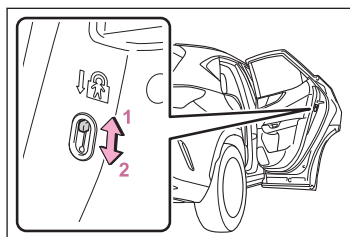


- 1 Unlock
- 2 Lock

These locks can be set to prevent children from opening the rear doors. Push down on each rear door switch to lock both rear doors.

Opening and closing the windows

Operations using the power window switches

Opening/closing the windows using the power window switch



- 1 Lift the power window switch partway.
The window will close while the switch is lifted.
- 2 Fully lift the power window switch.
The window will fully close automatically.
To stop the window partway, operate the switch in the opposite direction.
- 3 Push the power window switch partway.
The window will open while the switch is pushed.
- 4 Fully push the power window switch.
The window will fully open automatically.
To stop the window partway, operate the switch in the opposite direction.

Operations using the wireless remote control

The power windows can be opened using the wireless remote control.*¹


Open the windows using the wireless remote control

Using the wireless remote control, the doors can be unlocked and all of the windows opened at the same time.*²

● Push and hold the unlock switch on the wireless remote control.

The doors will unlock and the windows and moon roof* or panoramic moon roof* will open.

A buzzer sounds to indicate that all of the windows and the moon roof* or panoramic moon roof* are opening.

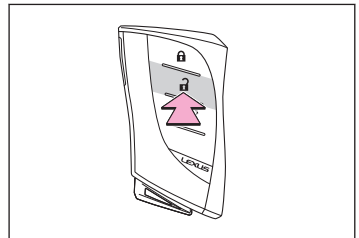

*1: These settings must be customized at your Lexus dealer.

*2: This setting must be customized at your Lexus dealer.


*: If equipped

Prevent accidental operation of the windows

The window lock switch is designed to prevent children from accidentally opening or closing a window.

Press the window lock switch.

The indicator **A** will come on and the passenger windows will be locked.



Using the moon roof*

For comfortable cabin experience, the moon roof can be opened or tilted up.

Functions which aid in safe opening and closing of the moon roof

The following functions aid in safe opening and closing of the moon roof.

- Jam protection function

If an object is detected between the moon roof and the frame while the moon roof is closing or tilting down, travel is stopped and the moon roof opens slightly.


- Moon roof open warning buzzer

The buzzer sounds and a message is shown on the multi-information display in the instrument cluster when the power switch is turned off and the driver's door is opened with the moon roof open.

Opening the moon roof


Press the  switch.*³

The moon roof stops slightly before the fully open position to reduce wind noise.



Closing the moon roof

Press the  switch.*⁴




*: If equipped

*³: Lightly press either end of the moon roof  switch to stop the moon roof while it is operating.

*⁴: Lightly press either end of the moon roof  switch to stop the moon roof while it is operating.


Tilting up the moon roof

Press the  switch.*⁵



Tilting down the moon roof

Press the  switch.*⁶



*⁵: Lightly press either end of the moon roof  switch to stop the moon roof while it is operating.

*⁶: Lightly press either end of the moon roof  switch to stop the moon roof while it is operating.


Back door functions and operation

The back door can be locked/unlocked and opened/closed by the following procedures.


Back door operations using the back door opener switch

Open the back door automatically using the back door opener switch(vehicles with power back door)

Press the back door opener switch with the back door unlocked.

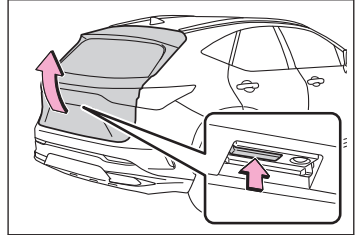

Open the back door manually using the back door opener switch (vehicles without power back door)

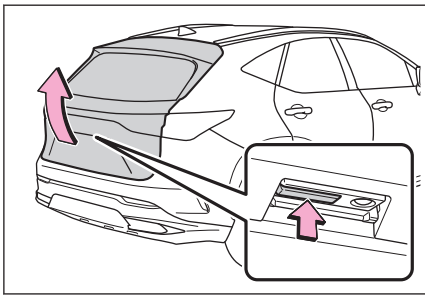


Lift the back door while pressing the back door opener switch.

Back door operations using the back door switch*

Opening/closing the back door using the back door switch

Press the .

A buzzer sounds and the back door automatically closes.

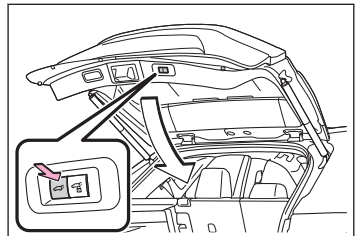

Back door operations using the back door operation switch inside the vehicle*


Opening/closing the back door from the inside

Press the  for 1 second.

A buzzer sounds and the back door automatically opens and closes.


Pressing the  while the back door is opening/closing stops the operation.

When the  is pressed again during the halted operation, the back door will perform the reverse operation.

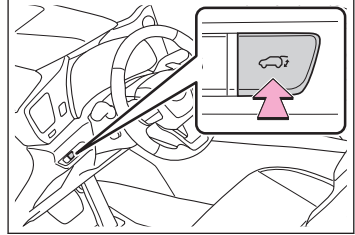

Operating the back door using the smart access system with push-button start

Lock/unlock the back door using smart access system with push-button start



1 Press **1**.


All of the doors will unlock. However, the doors cannot be unlocked within 3 seconds after they were locked.

2 Press **2**.

All of the doors will lock. Make sure that the doors are securely locked.

Back door operations using the wireless remote control

Lock/unlock the back door using wireless remote control



1 Press .

All of the doors, including the back door, will lock.


2 Press .

All of the doors, including the back door, will unlock.

*: If equipped

Back door operations using the kick sensor (vehicles with Hands Free Power Back Door)

Open/close the back door using the kick sensor (vehicles with Hands Free Power Back Door)

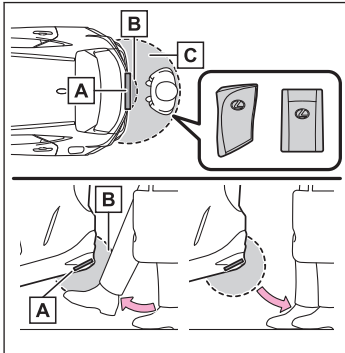

- A Kick sensor
- B Kick sensor detection area
- C Smart access system with push-button start operation detection area

1 While carrying an electronic key, stand within the smart access system with push-button start operation range, approximately 19.7 to 27.6 in. (50 to 70 cm) from the rear bumper.

2 Move your foot to approximately 3.9 in. (10 cm) from the rear bumper.

Operate the back door without contacting the rear bumper with your foot.

- 3 When a buzzer sounds, move your foot back. A buzzer will sound and the back door will automatically fully open or close.

Refueling

■ Before refueling the vehicle


- Turn the engine switch off and ensure that all the doors and windows are closed.
- Confirm the type of fuel.

Opening the fuel tank cap


1 Press the opener to open the fuel filler door.

The fuel filler door will open within about 10 seconds of the switch being pressed. Before refueling is possible, a message will be shown on the multi-information display in the instrument cluster to indicate the progress of the fuel filler door opener.

The fuel filler door will open.



2 Turn the fuel tank cap slowly and remove it, then put it into the holder on the fuel filler door.



Warning lights and indicators

List of warning lights

Warning lights inform the driver of malfunctions in the indicated vehicle's systems.

BRAKE (U.S.A.)  (Canada) (red)	Brake system warning light ⁽¹⁾
 (yellow)	Brake system warning light ⁽¹⁾
	High coolant temperature warning light ⁽²⁾
	Hybrid system overheat warning light ⁽²⁾
	Charging system warning light ⁽²⁾
	Low engine oil pressure warning light ⁽²⁾
 (U.S.A.)  (Canada)	Malfunction indicator lamp ⁽¹⁾
	SRS warning light ⁽¹⁾

ABS (U.S.A.) (ABS) (Canada)	ABS warning light ⁽¹⁾
	Inappropriate pedal operation warning light ⁽²⁾
 (red)	Electric power steering system warning light ⁽¹⁾
 (yellow)	Electric power steering system warning light ⁽¹⁾
	Low fuel level warning light
	Driver's and front passenger's seat belt reminder light
REAR 	Rear passengers' seat belt reminder light (vehicles without a head-up display)
 REAR	Rear passengers' seat belt reminder light (vehicles with a head-up display)
	Tire pressure warning light ⁽¹⁾ (3)
 (yellow)	LDA indicator
 (yellow)	LTA indicator
 (yellow)	PDA indicator

	Intuitive parking assist OFF indicator ^{*(1)}
 (yellow)	Cruise control indicator
 (yellow)	Dynamic radar cruise control indicator
	Driving assist information indicator ⁽¹⁾
	PCS warning light ⁽¹⁾
	Slip indicator ⁽¹⁾
 (U.S.A.) (flashes)  (Canada) (flashes)	Parking brake indicator
 (flashes)	Brake hold operated indicator ⁽¹⁾

(1) These lights come on when the power switch is turned to ON to indicate that a system check is being performed. They will turn off after the hybrid system is on, or after a few seconds. There may be a malfunction in a system if the light does not come on, or turn off. Have the vehicle inspected by your Lexus dealer.

(2) This light illuminates on the multi-information display.

(3) It also comes on due to natural causes such as natural air leaks and tire inflation pressure changes caused by temperature. Adjust the tire inflation pressure to the specified level. The light will turn off after a few minutes. In case the light does not turn off even if the tire inflation pressure is adjusted, have the system checked by your Lexus dealer.

For further information, refer to the "OWNER'S MANUAL".

*: If equipped

List of indicators

The indicators inform the driver of the operating state of the vehicle's various systems.

	Turn signal indicator
 (U.S.A.)	Headlight indicator
 (Canada)	Tail light indicator
	Headlight high beam indicator
	AHS indicator ^{*(1)} AHB indicator ^{*(1)}
	Front fog light indicator
	PCS warning light ⁽¹⁾⁽³⁾
 (green/white)	Cruise control indicator
 (green/white)	Dynamic radar cruise control indicator
 (green/white)	LDA indicator
	LDA OFF indicator ^{*(3)}

*: If equipped

 (green/white)	LTA indicator
	Outside rear view mirror indicators ⁽²⁾
	Intuitive parking assist OFF indicator ^{*(1)(3)}
	Intuitive parking assist detection indicator ^{*(4)}
	Driving assist information indicator ⁽¹⁾⁽³⁾
 (flashes)	Slip indicator ⁽¹⁾
	VSC OFF indicator ⁽¹⁾⁽³⁾
	"READY" indicator
 (U.S.A.)  (Canada)	Parking brake indicator
	Brake hold standby indicator ⁽¹⁾
	Brake hold operated indicator ⁽¹⁾
	EV indicator
	Low outside temperature indicator ⁽⁵⁾
	[AIR BAG ON/OFF] indicator ⁽⁶⁾

 (green/white)	PDA indicator
	EV drive mode indicator
	Eco drive mode indicator
	Sport mode indicator
	Trail Mode indicator

- (1) These lights come on when the power switch is turned to ON to indicate that a system check is being performed. They will turn off after the hybrid system is on, or after a few seconds. There may be a malfunction in a system if the light does not come on, or turn off. Have the vehicle inspected by your Lexus dealer.
- (2) This light illuminates on the outside rear view mirrors.
- (3) This light comes on when the system is turned off.
- (4) Vehicles without Multimedia Display or rear camera
- (5) When the outside temperature is approximately 37°F (3°C) or lower, this indicator will flash for approximately 10 seconds, then stay on.
- (6) This light illuminates on the front interior/personal lights.

 INFORMATION

 Intuitive parking assist OFF indicator


Vehicles without center display: The indicators turn off when the shift position is changed to R regardless of whether the intuitive parking assist function is turned on or off.

For further information, refer to the "OWNER'S MANUAL".

Using the mechanical key

To take out the mechanical key, push the release button and take the key out.


The mechanical key can only be inserted in one direction, as the key only has a groove on one side. If the key cannot be inserted in a lock cylinder, turn it over and attempt to insert it again. After using the mechanical key, return it to its original position and carry it with the electronic key. If the electronic key battery is depleted, the entry function is not operating properly, or the vehicle 12-volt battery is discharged, you will need the mechanical key.

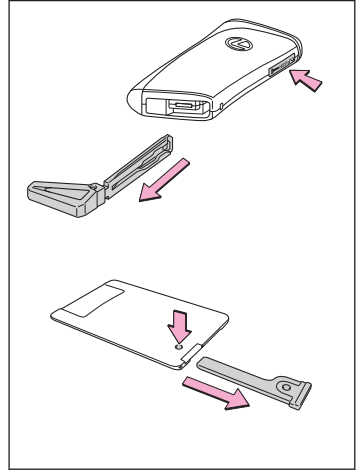


Locking/unlocking the doors

- 1 Insert a plastic card, etc. into the gap in the door handle to pry up the cover.


To avoid damage, do not apply excessive force to the cover.

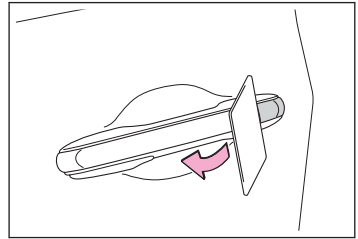

- 2 Remove the cover by pressing it on the rear.

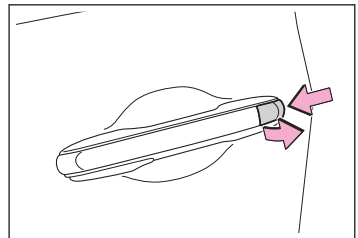

- 3 Use the mechanical key in order to perform the following operations:

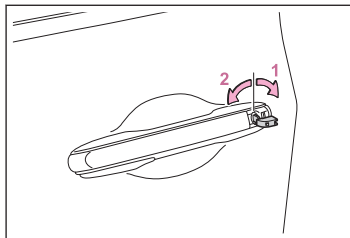


- 1 Unlocks all the doors
Turning the key unlocks the driver's door. Turning the key again unlocks the other doors.
- 2 Locks all the doors

If a door cannot be opened using the door opener switch

If a door cannot be opened using the door opener switch, it can be opened using a manual release handle.

Operating a manual release handle

► Outside the vehicle

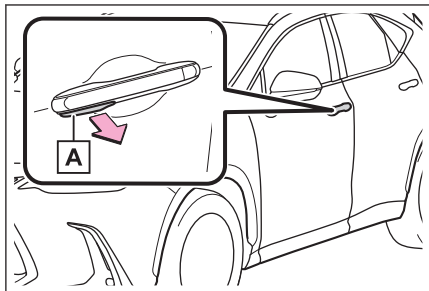


Pull the manual release handle **A** to open the door.

Normally, the manual release handles cannot be used to open the doors.

To open a door, enable manual release handle operation. → P.105

► Inside the vehicle

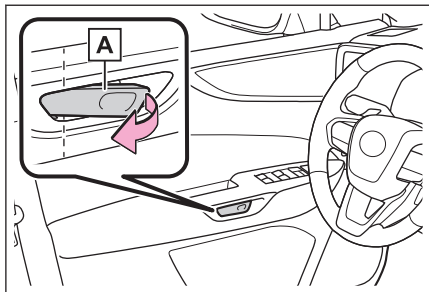

Pull the manual release handle **A** twice to open the door.


Pulling the handle once will enable operation. Pulling the handle again will open the door.

Enabling outside manual release handle operation using a mechanical key


Operation of a manual release handle can be enabled by unlocking a door with the mechanical key.

- 1 Insert a plastic card, etc. into the gap in the door handle to pry up the cover.**

To avoid damage, do not apply excessive force to the cover.




- 2 Remove the cover by pressing it on the rear.**



- 3 Using the mechanical key, turn the lock cylinder to the unlock side to enable the manual release handle operation.**

The mechanical key can only be inserted in one direction, as the key only has a groove on one side.

If the key cannot be inserted in a lock cylinder, turn it over and re-attempt to insert it.




Starting the hybrid system when the electronic key is not operating normally

- 1 Ensure that the shift position is in P and depress the brake pedal.
- 2 Touch the Lexus emblem side of the electronic key to the power switch.

When the electronic key is detected, a buzzer will sound and the power switch mode will change to ON.

If the smart access system with push-button start has been disabled by a customization setting, the power switch mode will change to ACC.



- 3 Firmly depress the brake pedal and check that a message is shown on the multi-information display.
- 4 Press the power switch.

In the event that the hybrid system still cannot be started, contact your Lexus dealer.

If the electronic key battery becomes depleted, a warning message will be shown on the multi-information display. Replace the battery with a new one. For instructions on replacing the battery, refer to the "OWNER'S MANUAL".

If you need further assistance, contact your Lexus dealer.



Owner's Manual Quick Guide:
Publication No. OMF6044U
Part No. 01999-F6044
Printed in the U.S.A. 01-2404-00